



This Document Has Been Superseded.
For Reference Only

Guidance for Flood Risk Analysis and Mapping

Levees

November 2022



FEMA

This page intentionally left blank (*FEMA Blank Page Note* style)

**This Document Has Been Superseded.
For Reference Only**

Requirements for the Federal Emergency Management Agency (FEMA) Risk Mapping, Assessment, and Planning (Risk MAP) Program are specified separately by statute, regulation, or FEMA policy (primarily the Standards for Flood Risk Analysis and Mapping). This document provides guidance to support the requirements and recommends approaches for effective and efficient implementation. The guidance, context, and other information in this document is not required unless it is codified separately in the aforementioned statute, regulation, or policy. Alternate approaches that comply with all requirements are acceptable.

For more information, please visit the FEMA Guidelines and Standards for Flood Risk Analysis and Mapping webpage (www.fema.gov/flood-maps/guidance-partners/guidelines-standards). Copies of the Standards for Flood Risk Analysis and Mapping policy, related guidance, technical references, and other information about the guidelines and standards development process are all available here. You can also search directly by document title at www.fema.gov/multimedia-library.

**This Document Has Been Superseded.
For Reference Only**

Table of Revisions

The following summary of changes details revisions to this document subsequent to its most recent version in November 2021.

Affected Section or Subsection	Date	Description
Section 2, Table 1	November 2022	Removed language affected by Risk Rating 2.0
Sections 3.3, 3.4, 3.6	November 2022	Added language regarding identification of levees and data collection to align with National Levee Database requirements
Section 4.1.2	November 2022	Added additional details regarding application of the freeboard tapering requirement
Section 4.1.8	November 2022	Added clarification regarding extent of interior drainage analysis
Section 4.4.4	November 2022	Added text regarding priority of mapping zone types within levee impacted area
Section 6.4.3	November 2022	Removed language affected by Risk Rating 2.0
Sections 6.9, 6.10	November 2022	Added options to include multiple Natural Valley analyses based on reaches if original analysis underrepresents the flood hazard.
Section 6.17.1	November 2022	Removed language affected by Risk Rating 2.0
Sections 7.2	November 2022	Added text referencing the Applied Approaches to Non-Levee Features document.

**This Document Has Been Superseded.
For Reference Only**

Table of Contents

1. Levees Overview	1
1.1. Prior Guidance Documents.....	2
1.2. Flood Hazard Mapping and Levees.....	3
1.2.1. Accredited Levee System	3
1.2.2. Provisionally Accredited Levee System.....	3
1.2.3. non-Accredited levee System	4
1.2.4. Levees Undergoing Restoration (Zone AR) and Undergoing Construction (Zone A99)	4
1.2.5. Levee Seclusion Mapping.....	5
1.3. Summary of Recent Legislation and Recommendations	5
1.3.1. Water Resources Development Act of 2007.....	5
1.3.2. Flood Protection Structure Accreditation Task Force	6
1.3.3. National Academy of Science Recommendations	6
1.4. Levee-Related Communication and Community Engagement.....	7
1.5. Chapter Overviews	8
1.5.1. Chapter 2, Glossary of Levee Terms	8
1.5.2. Chapter 3, Levee Data Inventory	8
1.5.3. Chapter 4, Accredited Levee Systems	8
1.5.4. Chapter 5, Provisionally Accredited Levees	8
1.5.5. Chapter 6, Non-Accredited Levees	8
1.5.6. Chapter 7, Non-Levee Features	9
1.5.7. Chapter 8, FEMA and Other Federal Agency Coordination.....	9
2. Glossary	9
3. Levee Data Inventory	16
3.1. Background.....	17
3.2. National Levee Database	17
3.3. Identification and Mapping of Levees in Flood Hazard Studies and Map Revisions	18
3.4. FEMA Regulatory Levee Data	20
3.5. Tracking Levee Accreditation Status.....	21
3.6. Reporting Levee System Updates	22
3.7. Levee Data Storage Standards	22
3.7.1. Levee Data Storage and Documentation for the MIP.....	22

**This Document Has Been Superseded.
For Reference Only**

4.	Accredited Levee Systems	24
4.1.	44 CFR 65.10 Requirements	26
4.1.1.	Freeboard	26
4.1.2.	Riverine Freeboard	26
	<i>Riverine Freeboard Exceptions</i>	<i>29</i>
	Statistical Confidence Limits of the 1% annual-chance Discharge.....	30
	Changes in Stage Discharge Relationships	30
	Sources, Potential, and Magnitude of Debris, Sediment, and Ice Accumulation	30
	Stability Analysis at Most Critical Section	30
4.1.3.	Coastal Freeboard.....	30
	<i>Coastal Freeboard Exceptions.....</i>	<i>32</i>
4.1.4.	Closures.....	32
4.1.5.	Embankment Protection.....	33
4.1.6.	Embankment and Foundation Stability	34
4.1.7.	Settlement.....	35
4.1.8.	Interior Drainage	35
4.1.9.	Other Design Criteria	36
4.1.10.	Plans for Maintenance, Operation, and Emergency Preparedness	37
	<i>Operation Plans.....</i>	<i>37</i>
	<i>Emergency Preparedness Plans</i>	<i>39</i>
	<i>Maintenance Plans</i>	<i>40</i>
	<i>Certification Requirements.....</i>	<i>40</i>
	<i>Permits and Other State and Local Requirements</i>	<i>41</i>
4.2.	Additional Levee Accreditation Considerations.....	41
4.2.1.	Levee System Tie-In Considerations	41
4.2.2.	Use of Other Federal Agency Information in Support of Accreditation Submittals ..	44
	<i>Use of USACE Information in Support of Accreditation Submittals.....</i>	<i>44</i>
4.2.3.	Continued Accreditation	48
4.2.4.	Expiration of Data Certification or Endorsement	48
4.2.5.	Updated Modeling along an Accredited Levee.....	49
4.2.6.	Noted Structural or Maintenance Deficiencies	49
4.3.	Levee Accreditation Reviews	50
4.3.1.	FEMA Compliance Review	50
	<i>44 CFR 65.10 Accreditation Requirements Reviews</i>	<i>51</i>
	<i>Freeboard Compliance Check</i>	<i>51</i>
	<i>Closures Compliance Check.....</i>	<i>52</i>
	<i>Embankment Protection Compliance Check.....</i>	<i>52</i>
	<i>Embankment and Foundation Stability Compliance Check</i>	<i>52</i>

**This Document Has Been Superseded.
For Reference Only**

Settlement Compliance Check	53
Interior Drainage Compliance Check	54
Other Design Criteria Compliance Check.....	54
Operation Plans Compliance Check.....	54
Emergency Preparedness Plan Compliance Check	55
Maintenance Plans Compliance Check	55
Certification Requirements Compliance Check.....	55
Other Compliance Checks	56
Regulations.....	56
New Hydrologic and Hydraulic Analyses.....	56
Inspection Reports.....	56
Levee System Cross Reference Check and Certified Reach Documentation.....	56
4.3.2. Data Storage and Delivery.....	57
4.4. Accredited Levee Mapping and Notes	57
4.4.1. New Hydrologic and Hydraulic Analysis	57
4.4.2. “With Levee” and Natural Valley Analyses	57
4.4.3. Flood Profiles.....	58
4.4.4. BFE and SFHA Mapping.....	58
4.4.5. Floodway Analysis and Mapping Methods.....	59
4.4.6. Multiple Levee Scenarios	59
4.4.7. Accredited Levee Notes to Users	61
4.4.8. Accredited Levees in the FIS Report.....	61
5. Provisionally Accredited Levee Systems	61
5.1. Provisional Levee Accreditation Overview	61
5.2. PAL Eligibility Requirements	62
5.3. Considerations for Offering PAL to PAL Eligible Levee Systems.....	63
5.3.1. PAL Category A – Considerations for Offering PAL for Non-USACE Program Levee Systems	64
5.3.2. PAL Category B – Considerations for Offering PAL to USACE Program Levee Systems	65
5.4. PAL Communication and Coordination Processes.....	67
5.4.1. PAL Category A	68
5.4.2. PAL Category B.....	69
5.4.3. Timing of Initial Notification Letter.....	69
5.4.4. Communication Guidance for PAL Submission Accepted by FEMA	70
5.4.5. Communication Guidance for PAL Submission Not Accepted by FEMA	72
5.4.6. Rescinding the PAL Designation	72

This Document Has Been Superseded.
For Reference Only

5.4.7.	Data and Documentation Submission for PAL Levee Systems in Support of 44 CFR 65.10	72
5.5.	PAL Mapping and Notes.....	73
5.5.1.	Mapping Project With PAL Designations	73
	<i>Cartographic Specifications for PALs</i>	73
	<i>Notes to Users</i>	73
	<i>FIRM Panel Index</i>	74
	<i>FIRM Database</i>	74
	<i>Flood Risk Products</i>	74
5.5.2.	Mapping Project with Expired PAL Designation.....	74
6.	Non-Accredited Levee Systems	75
6.1.	Non-Accredited Levee Systems Defined.....	75
6.2.	Other Considerations	75
6.2.1.	Submission of Data through the Letter of Map Revision Process	75
6.2.2.	Coastal Considerations.....	76
6.2.3.	Expiring Provisionally Accredited Levee Designations.....	76
6.2.4.	Projects Involving Multiple Levee Systems.....	76
6.2.5.	Levee Restoration and Adequate Progress.....	76
6.3.	Levee Analysis and Mapping Procedure.....	77
6.4.	Levee Data Collection and Stakeholder Engagement (Figure 12, Element 200)	80
6.4.1.	Stakeholder Engagement.....	81
6.4.2.	Data Collection.....	82
6.4.3.	Stakeholder Coordination and Data Collection Meeting	84
	<i>Meeting Objectives</i>	84
	<i>Meeting Timing</i>	85
	<i>Meeting Attendees</i>	85
	<i>Meeting Messages</i>	85
	<i>Pre-Meeting Activities</i>	86
	<i>Meeting Activities</i>	86
	<i>Field Reconnaissance</i>	87
6.4.4.	Initial Levee Data Analysis.....	87
6.5.	Local Levee Partnership Team (Figure 12, Element 300).....	89
6.5.1.	Introduction and Mission.....	89
6.5.2.	Transparency.....	90
6.5.3.	Membership	90
6.5.4.	Roles and Responsibilities	91

This Document Has Been Superseded.
For Reference Only

6.6.	Local Levee Partnership Team Meetings (Figure 12, Element 300)	91
6.6.1.	Meeting Objectives	91
6.6.2.	Meeting Timing and Format	92
6.6.3.	Meeting Attendees.....	92
6.6.4.	Meeting Messages.....	92
6.6.5.	Pre-Meeting Activities	92
6.6.6.	Meeting Activities.....	93
6.7.	Levee Analysis and Mapping Plan (Figure 12, Element 400)	93
6.8.	Additional Data Collection (Figure 12, Element 410)	95
6.9.	System-Wide Analysis and Mapping Procedures (Figure 12, Element 610)	96
6.9.1.	Natural Valley Zone D	96
6.9.2.	Interior Drainage Analysis.....	97
6.10.	Levee Reach Analysis and Mapping Procedures (Figure 12, Element 620)	98
6.11.	Natural Valley Procedure (Figure 12, Element 620).....	100
6.11.1.	Hydraulic Significance of the Levee Reach	101
6.11.2.	Availability of Data	101
6.11.3.	Needs of the Community.....	101
6.11.4.	Data or Documentation Requirements.....	101
6.11.5.	Technical Procedures.....	101
	<i>Testing the Hydraulic Significance of the Levee Reach for Riverine Levees.....</i>	<i>104</i>
	<i>Modeling the Natural Valley Procedure on Levees Subject to Riverine or Lacustrine Flood Forces</i>	<i>104</i>
6.11.6.	Coastal Levee Situations	104
6.11.7.	Natural Valley Letter of Acceptance.....	104
6.12.	Structural-Based Inundation Procedure (Figure 12, Element 620).....	104
6.12.1.	Data Requirements.....	105
6.12.2.	Technical Procedures	105
	<i>Determination of Modeled Breach Locations.....</i>	<i>105</i>
	<i>Time of Breach Initiation.....</i>	<i>106</i>
	<i>Breach Shape.....</i>	<i>106</i>
	<i>Empirical Methods for Estimating Breach Shape</i>	<i>107</i>
	Dam Breach Equations	107
	Historical Levee Breach Information	107
	Physically Based Models for Estimating Breach Shape.....	107
	Development Time	108
	Sensitivity Analysis	108
6.12.3.	Mapping Breach Analysis Results.....	109

This Document Has Been Superseded.
For Reference Only

6.13.	Overtopping Procedure (Figure 12, Element 620).....	111
6.13.1.	Data Requirements.....	111
	<i>Loading Conditions Used for Evaluation</i>	112
	<i>Armored Surfacing</i>	112
	<i>Additional Considerations for Levees Subject to Coastal Flood Forces</i>	114
	<i>Technical Procedures</i>	114
6.14.	Freeboard Deficient Procedures (Figure 12, Element 620).....	117
6.14.1.	Data Requirements.....	117
6.14.2.	Technical Procedures.....	117
6.15.	Sound Reach Procedure (Figure 12, Element 620).....	118
6.15.1.	Data Requirements.....	118
6.15.2.	Technical Procedures.....	119
6.16.	Flood Hazards Evaluated by Flooding Source (Figure 12, Element 630).....	120
6.17.	Hydrograph Development.....	120
6.17.1.	Riverine Hydrograph Development.....	120
6.17.2.	Coastal Hydrograph Development.....	124
6.18.	Regulatory Floodways.....	124
6.18.1.	Coordination with Communities.....	126
6.18.2.	Floodway Analysis and Mapping Methods.....	126
6.18.3.	Hydraulically Insignificant Levees.....	127
6.18.4.	Hydraulically Significant Levees.....	127
6.18.5.	Hydraulically Significant Levees – On One Bank.....	128
6.18.6.	Hydraulically Significant Levees on Both Banks.....	130
6.18.7.	Both Encroachment Stations Computed on Levee or on Riverside of Levee.....	130
6.18.8.	One Encroachment Station Is on Landside of the Levee and the Other Is on the Levee or on the Riverside of the Levee.....	131
6.18.9.	Both Encroachment Stations Fall on Landside of the Levees.....	132
6.18.10.	The Methodology for Development of the Regulatory Floodway.....	133
6.19.	Hydraulic Modeling on Landside of the Levee.....	137
6.19.1.	Hydrologic Flow Routing.....	137
6.19.2.	Hydraulic Modeling.....	138
6.19.3.	One-Dimensional Steady Flow Analysis.....	138
6.19.4.	One-Dimensional Unsteady Flow Analysis.....	138
6.19.5.	Two-Dimensional Flow Analysis.....	139
6.19.6.	Combination of One-Dimensional and Two-Dimensional Models.....	140
6.20.	Flood Hazard Mapping.....	140

This Document Has Been Superseded.
For Reference Only

6.20.1. Mapping Process	140
6.20.2. Flood Insurance Implication of Zone D Mapping	143
6.20.3. Floodplain Management Implications of Zone D Mapping.....	143
6.20.4. Guidance Regarding FIRM Graphic and Database Standards	144
6.21. Guidance Regarding Flood Insurance Study Report Standards.....	145
6.21.1. Text	145
6.21.2. Floodway Data Table.....	146
6.22. Documentation	146
6.23. Review Procedures.....	147
6.23.1. Reviewing Data Required to Apply Different Procedures	147
6.23.2. Reviewing Modeling and Mapping for Non-Accredited Levees	147
7. Non-Levee Reaches and Non-Levee Features	148
7.1. Non-Levee Reach	149
7.2. Non-Levee Features	150
7.3. Communication of Risk.....	151
8. FEMA and Other Federal Agency Coordination	152
8.1. USACE	152

**This Document Has Been Superseded.
For Reference Only**

List of Figures

Figure 1: Example Levee System A.....	25
Figure 2: Freeboard Determination	28
Figure 3: Freeboard Near Structures	29
Figure 4: Wave Runup	31
Figure 5: Levee System Designed to End in the Absence of High Ground	42
Figure 6: Levee System Tying into Non-Levee Reach	42
Figure 7: Non-Accredited Levee System	43
Figure 8: Flood Hazard Mapping of Accredited Levee System	58
Figure 9: Multiple-Levee Scenario	60
Figure 10: PAL Determination Decisions Tree	67
Figure 11: Initial Notification Letter within Risk MAP Project Timeline.....	70
Figure 12: FEMA Levee Analysis and Mapping Procedure	79
Figure 13: Levee Data Collection and Stakeholder Engagement Process	81
Figure 14: Sample of Potential Inundation Extents	89
Figure 15: Example Segmentation of a Levee System	99
Figure 16: Natural Valley Cross-Section View.....	102

Figure 17: SFHA Delineation Using Natural Valley Procedure 103

Figure 18: Structural-Based Inundation Cross-Section View 109

Figure 19: SFHA Delineation Using Structural-Based Inundation Procedure 110

Figure 20: Overtopping Cross-Section View 115

Figure 21: SFHA Delineation Using Overtopping Procedure 116

Figure 22: Freeboard Deficient Cross-Section View 118

Figure 23: Sound Reach Cross-Section View 119

Figure 24: Sample Dimensionless Unit Hydrograph 122

Figure 25: Floodway Analysis Process Initial Analysis 128

Figure 26: Floodway Analysis Process Initial Analysis 129

Figure 27: Final Regulatory Floodway 130

Figure 28: Both Encroachments (A and B) on Riverside of Levees 131

Figure 29: One Encroachment on Riverside of Levee (A) and the Other on Landside of Levee (B) 131

Figure 30: The Landside Encroachment (B) Moved to the Levee 131

Figure 31: Both Encroachments at Levees 132

Figure 32: Both Encroachments Landward of the Levees 132

Figure 33: Use of Natural Valley Procedure to Determine Initial Encroachment Stations A and B 133

Figure 34: Using Left levee holding to find encroachment station C 134

Figure 35: Right Levee Holding to find Encroachment station D 134

Figure 36: Both levees Are Non-accredited 135

Figure 37: Left Levee Is Non-accredited, Right Levee Is Accredited 135

Figure 38: Right Levee Is Non-accredited, Left levee Is Accredited 136

Figure 39: Composite Mapping of Flood Hazards for the Levee System 141

Figure 40: Flood Hazard Mapping for Non-Accredited Levee System 143

Figure 41: Non-Levee Reach 150

Figure 42: Non-Levee Feature 151

This Document Has Been Superseded.
For Reference Only

List of Tables

Table 1: Levee Terms 9

Table 2: Summary of Minimum PAL Requirements 62

Table 3: Suggested Timeline for Additional Data 95

Table 4: Summary of Stakeholder Data Standards for Reach Analysis Procedures 100

Table 5: Sample Summary of Hydrologic and Hydraulic Analyses Table Guidance Clarification Routing 145

Table 6: Crop Insurance, Flood Insurance Rate Maps, and Levees 154

1. Levees Overview

This consolidated guidance document was prepared for FEMA, as part of the Risk MAP program, to promote sound and consistent implementation of levee-related National Flood Insurance Program (NFIP) regulations and mapping program standards that apply to levees.

This guidance document is intended to provide current information on the mapping of levees and associated flood hazards. This document captures current standards and practices and, therefore, does not address all topics related to the identification of flood hazards and risks associated with levees.

Federal, State, and local officials have often considered levee systems an effective structural approach for reducing average annual flood losses. However, it is an approach that needs to be considered cautiously. Carefully engineered and well-maintained levees should divert floodflows as intended in their design and keep the areas landward of the levees dry if their structural integrity is not compromised, all elements of the system are functional, and the floodwaters do not overtop the structure. However, a primary drawback is that levees could lead to increased development of areas landward of the levees over time and thereby increase the exposure to catastrophic failures during extreme events ([A Levee Policy for the National Flood Insurance Program](#), National Academy Press, 1982).

When it comes to working with communities on levee-related mapping projects or issues, FEMA shares a mission with its state agency partners, the U.S. Army Corps of Engineers (USACE), and other Federal agencies. That mission entails helping levee owners, flood control districts, community officials, floodplain managers, the media, and other stakeholders understand and properly communicate the risks associated with living and working landward of levees. Living with levees is a shared responsibility and local community officials should remain engaged in flood risk management activities. It is important for all stakeholders to know the risk; their role in helping to reduce that risk; and what specific actions they can take, including the purchase of flood insurance to further reduce the financial risk associated with living and working in levee-impacted areas. For more information, visit the Living with Levees portion of the FEMA website (<https://www.fema.gov/flood-maps/living-levees>).

The primary audiences for this guidance document are communities, regional entities, Tribal entities, and State agencies, including those participating in the Cooperating Technical Partners program (CTPs), FEMA Project Teams that are formed to carry out projects in support of the FEMA Regional Offices, and FEMA Regional Office and Headquarters staff. The FEMA Project Teams often include representatives of the FEMA Risk MAP providers. This guidance document is also intended for communities and local stakeholders involved in levee accreditation and the implementation of FEMA non-accredited levee analysis and mapping procedures.

The levee guidance in this document emphasizes the Risk MAP program vision of collaborating with local, regional, State, and Tribal entities throughout a watershed to deliver quality data that increases public awareness and leads to mitigation actions that reduce flood risk to life and

property. To achieve this vision, FEMA transformed its historic documents for flood hazard identification and mapping efforts into a more integrated process of identifying, assessing, communicating, planning, and mitigating flood-related risks aligned with the Risk MAP vision¹.

To accomplish this process, the appropriate analyses, mapping, and communication of risk of levee systems is necessary throughout the Risk MAP project lifecycle. FEMA has prepared this consolidated guidance in keeping with that responsibility.

1.1. Prior Guidance Documents

The consolidation of work that guided users through decades of levee-related procedures implemented during flood hazard mapping projects were incorporated into this guidance document. This is intended to promote sound and consistent implementation of policies, regulations, and standards for levee risk evaluation. This guidance enhances compliance with the Code of Federal Regulations; incorporates portions of Analysis and Mapping Procedures for Non-Accredited Levee Systems New Approach, (July 2013); and FEMA standards to facilitate implementation during flood hazard mapping projects. This guidance document has been prepared to expand on, and supersede, guidance provided in FEMA Operating Guidance (OG) 12-13; Procedure Memorandum (PM) Nos. 34, 43, 45, 51, 52, 53, and 63; and Appendix H of Guidelines and Specifications for Flood Hazard Mapping Partners. More details for each superseded guidance document are provided in each chapter of this document.

**This Document Has Been Superseded.
For Reference Only**

This guidance document does not supersede the following existing FEMA guidance documents:

- Analysis and Mapping Procedures for Non-Accredited Levee Systems New Approach.
- Guidance Document No. 29, Guidance for Flood Risk Analysis and Mapping: Levee Seclusion.
- Guidance Document No. 34, Guidance for Flood Risk Analysis and Mapping: Zone A99 and Zone AR Determinations.
- Guidance Document No. 72, Guidance for Flood Risk Analysis and Mapping: Levee-Specific Non-Regulatory Flood Risk Datasets.

These and additional mapping guidance and best practices can be accessed through the FEMA Guidelines and Standards for Flood Risk Analysis and Mapping webpage.

¹ For more information on the Risk MAP program, see <https://www.fema.gov/flood-maps/tools-resources/risk-map>

1.2. Flood Hazard Mapping and Levees

FEMA does not design, build, inspect, operate, maintain, or certify levees. However, as administrator of the NFIP, FEMA is responsible for accurately identifying flood hazards and communicating those hazards and risks to affected stakeholders.

Conditions in a community or watershed change over time; therefore, the need to update flood hazard information reflected on Flood Insurance Rate Maps (FIRMs) is assessed periodically to better reflect the current flood risk to people and property. FEMA updates FIRMs nationwide through the Risk MAP program. FEMA shows levee systems on the FIRM as being accredited, provisionally accredited, non-accredited, or in the process of being restored or constructed. FEMA designates the areas landward of the levees as Zone A, Zone AE, Zone AR, Zone A99, Zone D, Zone X (shaded), or Zone X depending on the status of the levee systems and the type of study performed. With new or updated FIRMs, community officials will have information to help them advise where and how to build more safely, and the public will understand their risk, allowing more informed decisions about reducing the risk to families, homes, and businesses.

Levees add complexity to an ongoing flood hazard study. To address the complexities that levees introduce, a FEMA Project Team should consider the presence of levees and appropriate mapping procedures as early in the study process as possible. Early consideration will help ensure that appropriate data collection and coordination occur. Subsections 1.2.1 through 1.2.5 briefly introduce the possible mapping options for levees.

**This Document Has Been Superseded.
For Reference Only**

1.2.1. ACCREDITED LEVEE SYSTEM

An accredited levee system is a system that FEMA has determined meets requirements of the NFIP regulations as cited in the Code of Federal Regulations (CFR) at Title 44, Chapter 1, Section 65.10 (44 CFR 65.10) and that FEMA has recognized on a FIRM as reducing the flood hazards posed by a base (1% annual-chance) flood. This determination is based on a submittal, by or on behalf of a community, which includes 44 CFR 65.10-compliant design data and documentation, certified by a registered Professional Engineer (P.E.), and operations and maintenance documentation under the appropriate jurisdiction. FEMA strongly encourages flood insurance for all insurable structures in floodplains, including those in areas landward of levees.

FEMA accreditation of a levee system does not guarantee that the levee will provide flood hazard reduction to properties from flooding; therefore, FEMA has included a note on related FIRM panels that overtopping, or failure of an accredited levee system is possible. To mitigate flood risk in residual risk areas, property owners and residents are encouraged to consider flood insurance and floodproofing or other protective measures. Chapter 4 of this document provides detailed information on the mapping of accredited levee systems.

1.2.2. PROVISIONALLY ACCREDITED LEVEE SYSTEM

When the area impacted by an accredited levee system shown on an effective FIRM is in the process of being remapped, FEMA may ask the levee owner or community to provide data and

documentation demonstrating the levee system still meets the requirements set forth in 44 CFR 65.10. To assist levee owners and communities, FEMA established the Provisionally Accredited Levee (PAL) designation as an option for mapping the area while providing levee owners or communities more time to gather the required data and documentation. The levee owner signs and submits an agreement to FEMA indicating the data and documentation required for compliance with 44 CFR 65.10 will be provided within 24 months of the 91st day following the date of the initial FEMA notification letter. FEMA places a note on the impacted FIRM panel(s) landward of the levee system to indicate FEMA has provisionally accredited the levee system and the designation of any existing Zone X (shaded) areas of flood hazard reduction due to levees is provisional. Chapter 5 of this document provides detailed information on the mapping of PALs.

1.2.3. NON-ACCREDITED LEEVE SYSTEM

Non-accredited levee systems are levee systems that do not meet the NFIP regulatory requirements of 44 CFR 65.10 and that are not shown on a FIRM as reducing the base flood hazard. FEMA recognizes that non-accredited levee systems do impact flood risk; for that reason, FEMA has developed analysis and mapping procedures for non-accredited levees that provide a suite of approaches for analyzing flood hazards landward of levee systems. Chapter 6 of this document provides detailed information on the mapping of non-accredited levee systems.

1.2.4. LEEVES UNDERGOING RESTORATION (ZONE AR) AND UNDERGOING CONSTRUCTION (ZONE AR)

The NFIP regulations contain two provisions that help mitigate the flood insurance impact on property owners during the restoration of non-accredited levee systems or construction of new levee systems. These are based on provisions of the National Flood Insurance Act of 1968, as amended, as cited in the United States Code (U.S.C.) at 42 U.S.C. 4014 (e) and 42 U.S.C. 4014(f). These provisions are intended to provide reduced flood insurance premium rates for insurable structures landward of levee system projects designed and intended for eventual accreditation. Under these provisions, a levee system undergoing construction, or restoration, but that cannot currently meet 44 CFR 65.10 requirements, is recognized by FEMA as providing some (less than the base flood) level of hazard reduction.

FEMA issues Flood Protection Restoration determinations, regulated through 44 CFR 65.14, in areas where a project is sufficiently underway to restore a levee system to meet 44 CFR 65.10 accreditation requirements. FEMA maps the areas landward of the levee system that is being restored as Zone AR on the FIRM and may present Base Flood Elevations (BFEs) representing the current hazard as if the levee system was not in place. The Zone AR determination may provide property owners with reduced flood insurance premium rates lower than rates in other mapped Special Flood Hazard Areas (SFHAs).

FEMA issues adequate progress determinations, regulated through 44 CFR 61.12, in areas where FEMA determines that a community has made adequate progress on a levee system construction or reconstruction project designed for flood hazard reduction. FEMA maps the areas landward of the

levee system as SFHAs designated Zone A99 on the FIRM. The Zone A99 determination also provides flood insurance premium rates and floodplain management requirements that are generally less than those required in other SFHAs. The Zone A99 designation is used in place of a shaded Zone X accredited levee system recognized as reducing the flood hazards from a base designation for the landward area of the levee system. The horizontal extent of the Zone A99 would match the boundary extent of the potential area of reduced flood hazard that in the future would be adjusted to a shaded Zone X accredited levee system recognized as reducing the flood hazards from a base flood designation.

Detailed information on Flood Protection Restoration and Adequate Progress determinations is provided in FEMA Guidance Document No. 34, [Guidance for Flood Risk Analysis and Mapping: Zone A99 and Zone AR Determinations](#). Guidance Document No. 34 is accessible through the FEMA Guidelines and Standards for Flood Risk Analysis and Mapping webpage.

1.2.5. LEVEE SECLUSION MAPPING

In March 2011, FEMA committed to updating the way flood hazards for non-accredited levee systems were analyzed and mapped. As a result, some in-progress FIRM updates that included levee systems were delayed or otherwise impacted while FEMA developed the analysis and mapping approach for non-accredited levees. FEMA developed the levee seclusion mapping approach as a project management solution to allow the release of the FIRM updates for those portions of the community outside of the levee impacted area. Through the levee seclusion mapping approach, FEMA maintains the flood hazard information as depicted on the current effective FIRM (the FIRM in effect before the in-progress update) with map notes explaining that the flood hazard information in these areas will be updated after FEMA applies an updated levee analysis and mapping approach. Levee seclusion was not intended to be a long-term mapping approach and was not anticipated to be implemented on any mapping projects initiated after July 2013. Justification to use Seclusion mapping on the FIRM panel must be coordinated with and approved by the FEMA Region and FEMA Headquarters. Detailed information on seclusion is provided in FEMA Guidance Document No. 29, [Guidance for Flood Risk Analysis and Mapping: Levee Seclusion](#), which is accessible through the FEMA Guidelines and Standards for Flood Risk Analysis and Mapping webpage.

1.3. Summary of Recent Legislation and Recommendations

This section summarizes some recent legislation and recommendations related to managing and assessing levee systems.

1.3.1. WATER RESOURCES DEVELOPMENT ACT OF 2007

Title IX of the Water Resources Development Act (WRDA) 2007, the National Levee Safety Act of 2007, as amended and codified in 33 USC Chapter 46, includes activities in support of establishing a National Levee Safety Program to be led by USACE in cooperation with FEMA. USACE and FEMA have been working within existing appropriations to develop some of the technical and communication building blocks necessary for an effective National Levee Safety Program. USACE

and FEMA remain fully committed to working within available appropriations to continue to make progress on achieving the overall objectives of the National Levee Safety Program. The National Levee Safety Act requires: 1) establishment of the Committee on Levee Safety as an all non-federal advisory body; 2) a database with an inventory of the Nation's levees; 3) a one-time review of all levees in the National Levee Database (NLD); 4) carrying out a levee safety initiative that establishes technical guidelines, creates and supports state/regional/tribal levee safety programs, provides technical assistance broadly and funding for specific items and improves public awareness of levee-related issues; and, 5) specified reports. Recommendations leading up to this legislation can be found on the USACE website (<https://www.usace.army.mil/Missions/Civil-Works/Levee-Safety-Program/>).

1.3.2. FLOOD PROTECTION STRUCTURE ACCREDITATION TASK FORCE

The USACE and FEMA formed the Flood Protection Structure Accreditation Task Force (Task Force) in accordance with Section 100226 of Public Law (P.L.) 112-141. The primary charge of the Task Force was to align agency processes, so information collected for either program can be used interchangeably and to align the information and data collected by USACE, so it is sufficient to satisfy NFIP accreditation requirements. The Task Force resulted in a list of recommendations and a formal memorandum of understanding signed by USACE and FEMA committing to establishing a coordinated approach for levee activities that is aligned with policies and goals of both agencies to promote life safety, flood risk reduction, risk communication, and sound national investments. The final Task Force report and memorandum of understanding can be found at <https://www.usace.army.mil/Missions/Civil-Works/Levee-Safety-Program/Task-Force/>.

This Document Has Been Superseded.
For Reference Only

1.3.3. NATIONAL ACADEMY OF SCIENCE RECOMMENDATIONS

The National Research Council (NRC) document titled [A Levee Policy for the National Flood Insurance Program](#), published in 1982, made recommendations to FEMA for a comprehensive levee policy for use in administering floodplain management, insurance, and hazard mapping aspects of the NFIP. The document addressed five areas that NRC deemed critical to a levee policy: (1) Minimum design standards; (2) Inspection and evaluation to be conducted by FEMA to assure conformance with minimum design standards at the time a levee is recognized in the program; (3) Requirements FEMA should place on communities with recognized levees; (4) Estimation of risk in areas landward of levees for use in setting insurance rates; and (5) Floodplain mapping of levee-impacted areas to portray SFHAs, degree of flood risk, and evacuation routes.

The National Academy of Sciences (NAS) document titled [Levees and the National Flood Insurance Program, Improving Policies and Practices](#), published in 2013, examines the way levees are addressed in the NFIP and provides advice as to what actions might be taken to improve program efficiency and effectiveness. The NAS document includes 11 recommendations and 10 conclusions to improve the policies and practices related to levees and the NFIP. Additional information on the NAS document is accessible through the NAS website at <https://nas-sites.org/levees/>. While FEMA is making progress toward achieving some of the goals and objectives, this guidance document does not address the modern risk-informed analysis recommended in the NAS document.

1.4. Levee-Related Communication and Community Engagement

To appropriately analyze and map the flood hazards in levee-impacted areas, FEMA will coordinate with communities during the Discovery Phase of a Flood Risk project, and throughout the project lifecycle as necessary, to understand the location and impacts of levee systems. The current, effective FIRMs may inadvertently represent levee systems as providing flood hazard reduction or other impacts to the conveyance of floodwaters, and as such, may indicate a lesser flood hazard and corresponding risk than what may actually exist in these areas. Because communities and property owners may not be fully aware of the risk associated with levee systems, coordination with local stakeholders is essential to identify, analyze, and map the flood hazards associated with levee systems and to provide relevant information and tools to help them understand their flood risk and mitigation opportunities in these areas.

FEMA developed the Risk Communications and Risk MAP Playbook, also known as the Community Engagement and Risk Communication (CERC) Playbook, to focus on the value of outreach and community engagement in ensuring the successful delivery of the Risk MAP program goals and demonstrating how communication can facilitate an understanding of the value of mitigation and the importance of resilience. The Playbook provides guidance to FEMA, FEMA Risk MAP providers (primarily, the Production and Technical Services [PTS] and CERC providers), and CTPs on developing approaches that will ultimately motivate communities toward mitigation action throughout the Risk MAP lifecycle, including those communities impacted by levees.

Section 5 of the Playbook, "Risk Communication for Communities with Levees", provides guidance on FEMA's role regarding levees, how that role intersects with the roles of other agencies; and how to effectively communicate flood risk with respect to levees. The levee section of the Playbook includes information on the following topics:

- Levee Systems: Who Does What?
- What Is Risk Communication in Relation to Levees?
- Why and How Does FEMA Map Flood Hazards for Levee-Impacted Areas?
- Risk Messaging for Levees
- Developing your Community Engagement Plan
- Building Resiliency

Project Team members should refer to the CERC Playbook for additional information about stakeholder engagement and links to examples, tools, and templates. The CERC Playbook can be accessed through the password-protected Risk Management Directorate SharePoint Portal or by contacting the FEMA Project Officer.

This guidance document focuses on mapping guidance and therefore does not cover risk communication in detail, although these are important portions of the flood hazard mapping project lifecycle.

1.5. Chapter Overviews

Primary topics covered by this guidance document include the collection and management of levee data; procedures for addressing accreditation, PALs, and non-accredited levees; addressing the topic of evaluating and mapping flood hazards landward of non-levee features; and coordination with USACE and other Federal agencies. Additional summary information for each chapter is provided in Subsections 1.5.1 through 1.5.8

1.5.1. CHAPTER 2, GLOSSARY OF LEVEE TERMS

The glossary in Chapter 2 contains levee terminology to be used throughout this guidance document.

1.5.2. CHAPTER 3, LEVEE DATA INVENTORY

Chapter 3 provides an overview and brief history of FEMA historic levee inventory systems. The chapter introduces FEMA's overall mission with early identification of levees, levee data tracking, inventory, mapping, and coordination/cooperation with USACE in the direction toward a unified national levee database. Chapter 3 provides guidance for populating and maintaining the NLD and National Flood Hazard Layer (NFHL).

**This Document Has Been Superseded.
For Reference Only**

1.5.3. CHAPTER 4, ACCREDITED LEVEE SYSTEMS

Chapter 4 provides focused guidance on levee accreditation, leveraging the requirements in 44 CFR 65.10 and the transformation of PM 45, Revisions to Accredited Levee and Provisionally Accredited Levee Notation, issued on May 12, 2008; and PM 63, Guidance for Reviewing Levee Accreditation Submittals, issued on September 2, 2010. In addition to the transformed guidance, Chapter 4 includes clarifications and best practices that have been collected since the implementation of PMs 45 and 63.

1.5.4. CHAPTER 5, PROVISIONALLY ACCREDITED LEVEES

Chapter 5 provides guidance to Project Team members (FEMA, FEMA Risk MAP providers, CTPs, and CTP subcontractors) on implementing the PAL process. This chapter is a transformation and revision of PM 43, Guidelines for Identifying Provisionally Accredited Levees, issued on September 25, 2006; PM 45, Revisions to Accredited Levee and Provisionally Accredited Levee Notation, issued on May 12, 2008; and PM 53, Guidelines for Notification and Mapping of Expiring Provisionally Accredited Levee Designations, issued on April 24, 2009.

1.5.5. CHAPTER 6, NON-ACCREDITED LEVEES

Chapter 6 provides guidance to FEMA Regional Office staff, FEMA Risk MAP providers, CTPs, and CTP subcontractors involved in performing flood hazard mapping projects where non-accredited levee

systems have been identified. This chapter follows the levee analysis and mapping procedures described in OG 12-13, Non-Accredited Levee Analysis and Mapping Guidance, dated September 2013.

1.5.6. CHAPTER 7, NON-LEVEE FEATURES

Chapter 7 recommends actions that would help ensure adequate identification, analysis, and mapping of potential flood hazards around non-levee features. This chapter is a transformation and revision of PM 51, Guidance for Mapping of Non-Levee Embankments Previously Identified as Accredited, issued on February 27, 2009.

1.5.7. CHAPTER 8, FEMA AND OTHER FEDERAL AGENCY COORDINATION

Chapter 8 provides guidance to FEMA Regional Office staff, Risk MAP providers, and CTPs performing flood hazard mapping projects where other Federal agencies may have a role. These potential roles could include policy development, actual mapping actions, and accreditation efforts involving levees. In addition, mitigation and outreach activities may involve other Federal agencies.

2. Glossary

Key levee terms used throughout this guidance document are defined in Table 1.

Table 1: Levee Terms

**This Document Has Been Superseded.
For Reference Only**

<i>Levee Term</i>	<i>Description</i>
Accredited Levee System	A levee system shown on a FIRM that is recognized as reducing the flood hazards posed by a base flood. This determination is based on the submittal of data and documentation as required by 44 CFR 65.10. The area landward of an accredited levee system is shown as Zone X (shaded) on the FIRM except for areas of residual flooding, such as ponding areas, which are shown as SFHA.
Berms	Horizontal strips or shelves of material built contiguous to the base of either side of levee embankments for the purpose of providing risk reduction from underseepage or erosion or increasing the stability of the slopes of the earthen embankment.

Levee Term	Description
Certification	As stated in 44 CFR 65.2(b), certification of analyses is a statement that the analyses have been performed correctly and in accordance with sound engineering practices. Certification of structural works is a statement that works are designed in accordance with sound engineering practices to provide risk reduction from the base flood. Certification of “as built” conditions is a statement that the structure(s) has been built according to the plans being certified is in place and is fully functioning. Certification documentation is the responsibility of the local project sponsor.
Closure Devices	Any movable and essentially watertight barriers, used during flood periods to close openings in levee systems, securing but not increasing the levee systems’ design level of risk reduction. Must be structural parts of the system during operation and designed according to sound engineering practice.
Erosion	The wearing away of land masses through gradual natural processes or catastrophic events.
Flood Risk	The risk of flooding in a leveed area that remains at any point in time after accounting for the flood risk reduction contributed by the levee system. Risk is a measure of the probability and severity of an event and its consequences. Flood risk is comprised of three parts: (1) the likelihood of occurrence of an event (e.g., flood, earthquake, etc.); (2) the likelihood associated with the performance of the levee system (e.g., levee breach, closure malfunction, overtopping, etc.), and (3) the magnitude of the consequences resulting from inundation of the levee impacted area during that event (e.g., life loss, economic damages, environmental damages, etc.).
Floodwall	A designed structural wall constructed adjacent to shorelines for the purpose of reducing flooding of property on the landward side of the wall. Floodwalls are normally constructed in lieu of or to supplement levees where the land required for levee construction is too expensive or not available.
Freeboard	A factor of safety usually expressed in feet above a flood level for purposes of floodplain management. “Freeboard” tends to compensate for the many unknown factors that could contribute to flood heights greater than the height calculated for a selected size flood and floodway conditions, such as wave action, bridge openings, and the hydrological effect of urbanization of the watershed. At times, overbuild to account for long-term settlement and incrementing the height to ensure maintenance access during flood events is referred to as freeboard as well. For levees and purposes of the NFIP, this is the vertical distance between the top of a levee and the water level that can be expected during the base flood.

This Document Has Been Superseded
For Reference Only

Levee Term	Description
Freeboard Deficient Procedure	Non-accredited levee analysis and mapping procedure that is applicable if the freeboard standard is not met, but the top of levee is above the base flood. A Freeboard Deficient levee reach must meet the structural requirements of 44 CFR 65.10 and have documented operation, maintenance, and emergency preparedness plans. Freeboard Deficient Levee reaches differ from an accredited levee system because they are part of a levee system that as a whole cannot meet accreditation requirements and because they cannot meet the regulatory freeboard standard.
Gravity outlets	Culverts, conduits, or other similar conveyance openings through embankments or floodwalls that permit discharge of interior floodwaters by gravity when the outlets are above exterior water levels. Gravity outlets are equipped with gates to prevent flows from entering the levee impacted area during time of high exterior stages.
Hazard	An event or physical condition that has the potential to cause fatalities, injuries, property damage, infrastructure damage, agricultural loss, damage to the environment, interruption of business, and other types of loss or harm.
Hydraulic Analysis	An engineering analysis of a flood source carried out to determine how flood waters will move within the system in response to differing discharge quantities.
Hydraulic Independence	Two levees or levee reaches are considered hydraulically independent when their level of flood hazard reduction functions independently from the other; their corresponding levee impacted areas are not identical; and if one breaches or overtops, the structural integrity of the other levee/levee reach is not adversely impacted.
Hydraulically Insignificant	For mapping purposes, a structure is considered hydraulically insignificant if, during a 1% annual-chance flood event, the peak water-surface elevations landward of the structure may be the same regardless of whether the structure was in place.
Inspection	A visual assessment of physical features of a levee system to determine the general condition and operability of the levee. This may include operation and mechanical features such as pumps or gates.
Interior Drainage	Natural or modified removal of runoff within an area landward of a levee.
Interior Drainage Systems	Systems associated with levee systems that usually include storage areas, gravity outlets, pumping stations, or a combination thereof to control interior drainage.

**This Document Has Been Superseded.
For Reference Only**

Levee Term	Description
Levee	Per 44 CFR 59.1, a manmade structure, usually an earthen embankment, designed and constructed in accordance with sound engineering practices to contain, control, or divert the flow of water to reduce flood hazards posed by temporary flooding.
Leveed Area	A spatial feature in the National Levee Database defined by the lands from which floodwater is excluded by the levee system.
Levee Breach	A rupture, break, or gap in a levee system that causes flooding in the area landward of the levee system and may be due to overtopping or levee feature failure.
Levee Feature	A structure that is critical to the functioning of a levee system, including: (A) an embankment section; (B) a floodwall section; (C) a closure structure; (D) a pumping station; (E) an interior drainage work; and (F) a flood damage reduction channel.
Levee Impacted Area (<i>for base flood</i>)	The area landward of a levee system that would be inundated by the corresponding base flood if the flood hazard reduction effect of the levee system is not considered. Often, this area will be identified by applying the Natural Valley Procedure for the levee system.
Levee Owner	A federal or state agency, a water management or flood control district, a local community, a levee district, a nonpublic organization, or an individual considered the proprietor of a levee. The levee owner is responsible for administering the operations, maintenance, and emergency preparedness plans for the levee system. Often referred to as levee sponsor.
Levee Reach	A levee reach is a portion of a levee system (usually a length of a levee) that may be considered for analysis purposes to have approximately uniform representative properties. A levee reach is a unique component having properties different than other reaches of the levee system and may be used to evaluate the performance of a portion of the levee system. No minimum or maximum length is associated with a reach. Any continuous section of a levee to which a single analysis and mapping procedure may be considered as a reach.
Levee Segment	A discrete portion of a levee system that is operated and maintained by a single entity. A levee segment can be comprised of a single levee reach or multiple reaches. A levee segment may comprise one or more levee feature.

This Document Has Been Superseded.
For Reference Only

Levee Term	Description
Levee System	A flood hazard-reduction system that consists of one or more levee segments/reaches and other features, such as floodwalls and pump stations, which are interconnected and necessary to ensure exclusion of the design flood from the associated hydraulically independent levee impacted area, and which are constructed and operated in accordance with sound engineering practices.
Line of Flood Hazard Reduction	The centerline of the levee segments/reaches which exclude floodwaters from the base flood event from the levee impacted area.
Local Levee Partnership Team (LLPT)	A workgroup that is facilitated by FEMA when a levee system will be analyzed by levee analysis and mapping procedures for non-accredited levees. The primary function of this group is to share information/data and identify options based on stakeholder roles and knowledge.
National Levee Database (NLD)	The NLD, developed by the USACE in cooperation with FEMA, is a dynamic, searchable inventory of information for all levee systems in the nation. The database contains information to facilitate and link activities, such as flood risk communication, levee system evaluation for the NFIP, levee system inspections, floodplain management and risk assessments. The NLD continues to be a dynamic database with ongoing efforts to add levee data from federal agencies, states, and tribes.
Natural Valley Procedure	<p>Non-accredited levee procedure that can be applied to all non-accredited levee reaches. The Natural Valley Procedure is used in two ways: first landward of the entire levee system to determine the outer limits of any levee impacted Zone D areas, and second as a potential procedure applied to individual levee reaches to determine the SFHA on the landward side of the levee reach. Several factors are considered when determining whether to use the Natural Valley Procedure to determine the SFHA:</p> <p>The levee reach does not significantly obstruct the flow of water; Data necessary for more complex methods is not and will not be available in the near term; or</p> <p>The community (or tribal entity, when appropriate) provides feedback that it is the acceptable procedure to use.</p> <p>For riverine levee systems, the Natural Valley Procedure reflects the levee geometry in the hydraulic model but allows water to flow on either side of the levee. For coastal levee systems, the Natural Valley Procedure reflects the levee geometry, and consideration is given as to how the levee system impacts wave propagation.</p>

This Document Has Been Superseded
For Reference Only

Levee Term	Description
Non-Accredited Levee System	A levee system that does not meet the requirements in the NFIP regulations at Title 44, Chapter 1, Section 65.10 of the Code of Federal Regulations (44 CFR 65.10), Mapping of Areas Protected by Levee Systems, and is not shown on a FIRM as reducing the base flood hazards.
Non-levee Feature	A physical feature that is not designed, constructed, operated, or maintained as a flood control structure, but may inadvertently confine flow during some flood events.
Non-levee Reach	A form of manmade high ground which a levee system or segment/reach ties into, whose existence and performance is necessary for excluding floodwaters from the levee impacted area.
Overtopping	A condition that occurs when water levels, including any wave or run-up factors, exceed the top elevation of a levee system and flow into areas landward of the levee system. Levee system may be damaged and/or compromised.
Overtopping Procedure	Non-accredited levee procedure is applicable when the base flood is above the levee crest for a reach, and the community or levee owner has provided appropriate technical justification that the base flood event will not cause a levee breach. In addition to the structural standards established in 44 CFR 65.10, it is expected that more detailed structural analysis will be required to justify that the levee system can sustain the base flood. As with a Sound Reach and Freeboard Deficient levee reach, an operations and maintenance plan and documentation of inspection are required.
Piping	The result of water seepage that progressively erodes and washes away soil particles, leaving large voids in the soil. Removal of soil through sand boils by piping or internal erosion damages levees, their foundations, or both, which may result in settlement and has the potential to cause catastrophic failures of levees.
Ponding	The result of runoff or flows collecting in a depression that may have no outlet, subterranean outlets, rim outlets, or manmade outlets such as culverts or pumping stations. Impoundments landward of manmade obstructions are included in this type of shallow flooding as long as they are not backwater from a defined channel or do not exceed 3.0 feet in depth.

This Document Has Been Superseded.
For Reference Only

Levee Term	Description
Provisionally Accredited Levee (PAL)	A designation for a levee system that FEMA has previously accredited with reducing the flood hazards associated with a base flood on an effective FIRM, and for which FEMA is awaiting data and/or documentation that will demonstrate the levee system's compliance with the NFIP regulatory criteria of 44 CFR 65.10.
Pumping Stations	Pumps located at or near the levee system to discharge interior drainage over or through the levees or floodwalls (or through pressure lines) when free outflow through gravity outlets is prevented by high exterior stages.
Rehabilitation	The term rehabilitation means the repair, replacement, reconstruction, or reconfiguration of a levee system, including a setback levee.
Residual Risk (or Flood risk)	The flood risk (probability of capacity exceedance or failure and the associated consequences) that remains after the flood risk management measure is implemented.
Ring Levees	Levees that completely encircle or "ring" an area subject to inundation from all directions.
Risk Assessment	A systematic, evidence-based approach for quantifying and describing the nature, likelihood, and magnitude of risk.
Setback Levees	Levees that are built landward of existing levees, usually because the existing levees have suffered distress or are in some way being endangered, as by river migration.
Shallow Flooding	Flat areas where a lack of channels prevents water from draining away easily. Shallow flood types fall into three categories: sheet flow, ponding, and urban drainage. For the purposes of the NFIP, shallow flooding is distinguishable from riverine or coastal flooding because it generally occurs in an area where there is no channel or identifiable flow path.
Sound Reach Procedure	A reach that has been designed, constructed, and maintained to withstand the flood hazards posed by a base flood, in accordance with the standards in 44 CFR 65.10 of the NFIP regulations, but is part of a system that cannot be accredited.

This Document Has Been Superseded.
For Reference Only

Levee Term	Description
Structural-Based Inundation Procedure	Non-accredited levee analysis and mapping procedure applicable to some levee systems having reaches with either structural deficiencies that are known or structural integrity that is unknown (a common occurrence for older levee systems). For these levee reaches, FEMA will rely on modeling of breaches along the levee reach. It is not possible to predict the exact location of a levee breach. This procedure, therefore, does not predict the probability of failure at any breach location, nor does it provide a specific determination or evaluation of the overall levee system performance or require a determination of the likely failure mechanism. The procedure instead results in the development of a levee reach-specific SFHA that might occur as a result of potential breaches along a particular levee reach during the base flood. To determine this SFHA, possible locations of system breaches, geometry, and failure duration will be considered.
Zone A99	As defined in 44 CFR 61.12, areas subject to inundation by the base flood event, but which will ultimately be accredited upon completion of an under-construction levee system. These are areas of special flood hazard where enough progress has been made on the construction of a levee system, such as dikes, dams, and levees, to consider it complete for insurance rating purposes. Zone A99 may only be used when the levee system has reached specified statutory progress toward completion. No BFEs or depths are shown. Mandatory flood insurance purchase requirements and floodplain management standards apply.
Zone AR	As defined in 44 CFR 61.12, areas that result from the new non-accredited status of a previously accredited levee system that is determined to be in the process of being restored to provide base flood risk reduction. Mandatory flood insurance purchase requirements and floodplain management standards apply.
Zone D	An area of possible, but undetermined flood hazard. When analyzing and mapping areas landward of non-accredited levee systems, a Zone D may represent areas landward of a non-accredited levee, within the natural valley footprint, that are not depicted as SFHA resulting from freeboard deficient, sound reach, overtopping, and/or structural-based inundation procedures. The Zone D designation is used for non-accredited systems instead of the Zone X (shaded) designation because the flood hazard potential is more uncertain and possibly greater.

This Document Has Been Superseded.
For Reference Only

3. Levee Data Inventory

The construction or modification of flood hazard-reduction structures, such as levees and floodwalls, has had a significant effect on flood-prone areas throughout the United States. These structures are of particular importance in identifying flood hazards and risks to lives and property. As such, FEMA

and USACE share a common interest in managing and administering levee information and data throughout the Nation. This chapter provides background on previous FEMA levee inventory systems; introduces FEMA's overall mission with regard to identification of levees, levee data tracking, inventory, mapping, and coordination/cooperation with USACE on the development of a unified national levee database; and provides guidance for populating and maintaining FEMA data in the NLD and NFHL databases.

3.1. Background

With the enactment of WRDA in 2007, the U.S. Congress directed USACE to develop a national database for levee data and information. USACE developed the database model for the NLD to meet that long-term goal. FEMA initially used a simplified subset of the NLD database schema to compile a midterm levee inventory database for internal use. The two agencies synchronized the two databases to track information specific to their respective agencies with the goal to merge the two into one authoritative database. USACE focused on levees as part of their agency Levee Safety Program while FEMA's interest was to inventory all levees to identify those that may impact flood hazard mapping efforts as part of the NFIP.

The FEMA midterm levee inventory database contained data gathered for many levees that were designed to provide flood hazard reduction from the base flood, which is the minimum level of flood hazard reduction that is recognized by the NFIP. However, the database also included data for levees that did not meet NFIP accreditation requirements, including agricultural levees and levees of small and potentially less significant nature.

This Document Has Been Superseded.
For Reference Only

Beginning in 2012, FEMA and USACE formed a team of levee Subject Matter Experts (SMEs) to collaboratively merge the FEMA inventory into the NLD. The FEMA/USACE team completed the effort to integrate the two databases in May 2016.

3.2. National Levee Database

The NLD is the authoritative federal source for comprehensive information about all levees and floodwalls in the United States. The NLD is a dynamic database, with USACE and FEMA continuously updating its content and adding levee data from other Federal agencies, State agencies, Tribes, Territories, and communities. The NLD contains various levels of information for levees within the USACE Levee Safety Program and non-USACE Program levees, with information from FEMA and other organizations.

The NLD includes attributes of levees and floodwalls relevant to design, construction, operations, maintenance, repair, inspections, and performance. The NLD will facilitate linking levee safety activities, such as flood risk communication, levee system evaluations for the NFIP, levee system inspections, floodplain management, and risk assessments. Most of the information in the NLD is publicly available. Only information deemed sensitive from a security and internal mapping projects tracking standpoints is not publicly available. For information on accessing the non-public NLD,

interested parties should consult with FEMA Project Officer, other FEMA Regional Office staff, or the designated Project Team responsible for supporting the Region with levee inventory and tracking.

FEMA tracks levee-related information for the Risk MAP program through the NLD site. The National Levee Database Business Process, Appendix C: NLD FEMA Data Users Guide document (available on the NLD site for authenticated FEMA users) provides guidance about the processes for maintaining and updating FEMA data in the NLD related to accreditation status, PAL agreements, mapping approaches, 65.10 data, and study information.

3.3. Identification and Mapping of Levees in Flood Hazard Studies and Map Revisions

The FEMA-led Project Team should complete the research and identification of levees during Discovery or as early as possible during project initiation. Early identification of levees on the FIRM panels or LOMR study area will allow FEMA to address mapping needs. This identification should include coordination with USACE, the community, levee owners and appropriate stakeholders to collect information and clarify operation and maintenance responsibilities for the levee system.

Items that the Project Team should consider include, but are not limited to, those listed below (in no particular order of priority).

- Levee features in the S Levee feature class of the NFHL
- Levee symbology on the effective FIRM
- Levee impacted area polygon from the NFHL/effective FIRM
- Levee features in the USACE NLD database, especially the centerline, closure structure, floodwall, and leveed area
- Levee crest profile from field survey data collection when available.
- Local data for new or upgraded flood control projects recently completed that may not already be inventoried by FEMA or USACE
- Effective FEMA accreditation status of all existing levees in the project footprint
- Any existing, pending, or missing 44 CFR 65.10 certification data and documentation
- Non-accredited levees that may require new/updated levee analysis and mapping procedures for non-accredited levees
- Topographic data, such as lidar-generated data and U.S. Geological Survey (USGS) quadrangles, that may show potential flood-control structures, as well as any existing site/ground survey data provided or available for the flood study area

**This Document Has Been Superseded.
For Reference Only**

Standard SID 602 states: “For the analysis and mapping of flood hazards associated with levee systems, data, and documentation from the USACE National Levee Database (NLD) must be leveraged as a starting point. Effective FEMA data and supplemental data from local communities, tribal entities or other federal or state agencies, including terrain data, should be evaluated, and the most accurate data shall be used. FEMA shall provide USACE with updated levee data for incorporation into the NLD as appropriate.”

Flood study projects create the opportunity to refine levee data for both the NLD and the S_Levee feature class in the NFHL database. The Project Team is to examine the current effective FIRM, as well as the existing effective S_Levee feature class and compare it to the NLD, then compare both to the most recent lidar or survey data available to resolve any discrepancies. The following is a breakdown of the process to be adopted by the assigned Project Team member:

- Download the current effective NFHL data from the FEMA Flood Map Service Center (MSC) for counties that have been converted to a digital FIRM format, and a copy of the FIRM panels and LOMRs for non-digital maps
- Download the NLD levee features that are located within the project footprint, making note of any spatial misalignments and additional/missing features between the NFHL and the NLD
- Verify and correct these discrepancies in the production data through the use of best available orthoimagery, topographic data, online web mapping data
- For levees that were not previously mapped on the FIRM, or inventoried in the NLD, the assigned Project Team member should input a new entry in S_Levee, with relevant information collected and recorded, as described in Section 3.6 of this document. For levee or embankments that no longer exist or do not meet the definition of a levee they should be removed from S_Levee feature class, The S_Levee feature class should reflect the ground truth of the levee location and extent as of the date of the on-going study
- When the Project Team identifies a new levee system feature, or alignment discrepancies, the team should consult with FEMA Regional Office staff, USACE District staff, State, and local community Floodplain Administrator (FPA), to gather information such as design plans, as-builts, or operation and maintenance plans. The local FPA may have knowledge of any newly constructed flood-control projects that may not yet be inventoried by FEMA or USACE. The local FPA also may be able to provide updates to the data FEMA and USACE have already inventoried. Section 2.2 (Data Collection) of the National Levee Database Business Process document provides procedures for determining whether the levee system should be added, updated, or deleted from the NLD.
- The Project Team should send the recommended levee alignment, crest profile from available topo data or field survey data collection where applicable, to the local community

**This Document Has Been Superseded.
For Reference Only**

for review and concurrence.

- The Project Team is to report the updated levee features to the FEMA Region or designee as described in Section 3.6 of this document. FEMA or their designee is to verify any changes with USACE through the Notification, Deconfliction, Quality Control and Documentation described in Section 4.2 of the National Levee Database Business Process document. FEMA or their designee should inform the Project Team the outcome of the process. The Project Team should document the outcome in the TSDN.

When levees are identified, FEMA is to inform the community of the data requirements for FEMA to recognize on the FIRM a levee with reducing the base flood hazard. In accordance with 44 CFR 65.10(a), it is the responsibility of the community or other party seeking recognition of a levee system at the time of a flood hazard study or restudy to provide the data outlined in 44 CFR 65.10. (See Chapter 4 – Levee Accreditation of this document.)

FEMA will update the FIRMs to depict the hazard associated with the levee based on the data and documentation provided (if any) by the community, levee owner, or certifying engineer. In addition, FEMA will notify the community or party seeking recognition of the data collection period to provide information regarding the hazards associated with the levee system.

The specific data requirements and the length of the collection time period depend on the level of intended flood hazard reduction and the mapping path forward. The data and timelines are discussed in Chapter 4 – Accredited Levee Systems, Chapter 5 – Provisionally Accredited Levee Systems, and Chapter 6 – Non-Accredited Levee Systems. At any point, a levee owner may choose to submit a map revision following the MT-2 process regarding the submittal of data and documentation and updates to the flood hazards on the FIRMs.

3.4. FEMA Regulatory Levee Data

Once the Project Team has identified and researched all flood-control structures in the project areas, as discussed in Section 3.3, the team or partner uses the S_Levee table in the FIRM database to store the spatial features, and whether they have been demonstrated to meet NFIP requirements in 44 CFR 65.10. The Project Team will symbolize all flood control features inventoried in the S_Levee table on the FIRM panel as outlined in Flood Insurance Rate Map (FIRM) Panel Technical Reference: Format for Flood Insurance Rate Maps and noted as accredited or non-accredited.

The accreditation status of any levee in the NFHL and on the FIRM panel is only as current as the date of the effective study. At this time, FEMA does not define a set time period in which a certification of data for a levee remains valid for accreditation. The certifying engineer may provide a timeframe for which the certification of data for a levee is valid. When a map action is initiated to revise a current effective FIRM panel containing a levee, the assigned Project Team member will need to re-evaluate the validity of the certification and subsequent accreditation status of that levee. Further discussion regarding the continued accreditation of levees is provided in Chapter 4 of this document.

Inside the FIRM database, the assigned Project Team member must include the levee System ID from the NLD in the S_Levee table. For more information on populating the NLD System ID in the S_Levee table, the team members or partner should refer to Technical Reference: Flood Insurance Rate Map (FIRM) Database. It is critical that this NLD System ID is correctly attributed in the S_Levee table to maintain the linkage to the detailed levee records maintained in the FEMA accreditation status tracking systems with the NLD. The Project Team should always depict accredited levee systems on the FIRM with a “Zone X – Area with Reduced Flood Hazard Due to Levee System” flood hazard zone on the landward side of the levee. In addition, the Project Team should show all accredited levees, PALs, and non-accredited levees (all other levees shown on the FIRM with a levee symbol) in Table 9 of the current, effective Flood Insurance Study (FIS) Report(s). The team or partner shall ensure that the information in Table 9 matches the data populated in the S_Levee table. For more information on including levee information in the FIS Report, Project Team members or partners should refer to the current version of Flood Insurance Study (FIS) Report Technical Reference: Preparing FIS Reports.

The Technical References cited above are accessible from the FEMA Technical References webpage (<https://www.fema.gov/media-library/assets/documents/34519>).

If discrepancies exist between the FIRM database and the NLD, the assigned Project Team member must correct the discrepancies as part of the current map action so that the FIRM database, and subsequent NFHL, represent the most accurate levee alignment and inventory. Reporting requirements for the updated levee mapping are described in Section 3.6 of this document.

**This Document Has Been Superseded.
For Reference Only**

3.5. Tracking Levee Accreditation Status

Tracking specific levee information is critical to meeting FEMA program goals. As part of the NLD and subsequent tracking systems, FEMA maintains information about all levee systems such as:

- Current accreditation status on the effective FIRM
- Long-term levee project planning and prioritization
- Levee-related FIRM mapping issues
- 44 CFR 65.10 certification records
- Levee-related risk assessments
- Ongoing levee studies
- Local ownership, media, and political information

Roles and responsibilities for maintaining this information is documented in Appendix C: NLD FEMA Data Users Guide of the National Levee Database Business Process.

3.6. Reporting Levee System Updates

The Project Team producing the updated FIRM is expected to have detailed knowledge of whether the map update includes any updates to levee system reach alignments or changes to levee accreditation status. The process of researching levees for flood studies and map revisions was described in Section 3.3 of this document.

When new levee features are added to the inventory or existing levee data is modified, the Project Team must incorporate the updates into the FIRM database and then into the NFHL database. The Project Team is to coordinate with the FEMA Region or designee to incorporate appropriate updates into the NLD, guided by the National Levee Database Business Process and Editing Hosted NLD Feature technical document provided to FEMA Project Teams.

Specific questions related to levee data updates exist in the Key Decision Point (KDP) questionnaires. Accurate and complete answers to these levee questions are very important. The KDP levee information provided will give the FEMA Region staff and their designated Levee Project Monitors visibility on any updates that need to take place in the national levee data inventory and tracking systems. More detailed information on the KDP process and copies of the questionnaires are provided in FEMA Guidance Document No. 35, [Guidance for Flood Risk Analysis and Mapping: Key Decision Point \(KDP\) Process Guidance Document](#), which is accessible from the FEMA Guidelines and Standards for Flood Risk Analysis and Mapping webpage.

If levee map revisions are requested through the MT-2 Letter of Map Revision (LOMR) process, the appropriate FEMA Regional Levee Project Monitor must review the submittal so that the appropriate updates to the levee attributes and alignments can be entered in the NLD.

**This Document Has Been Superseded
For Reference Only**

3.7. Levee Data Storage Standards

To depict the hazard associated with levee systems on the FIRM, FEMA collects certified data pertaining to the requirements under 44 CFR 65.10 for levee accreditation and certain scenarios pertaining to the analysis and mapping procedures for non-accredited levees. The details of the data requirements and processes are laid out in Chapter 4--Accredited Levee Systems and Chapter 6--Non-Accredited Levee Systems) of this document. Once the FEMA Levee Project Monitor or designee considers the submitted certified data, the data needs to be consistently captured and documented for search ability throughout all FEMA Regions. The methods differ depending on whether the submitted certified data for an area is associated with a FEMA-funded mapping project, an area associated with a LOMR case, or unfunded area.

3.7.1. LEEVE DATA STORAGE AND DOCUMENTATION FOR THE MIP

Levee accreditation data and documentation provided to the Project Team from the Region or its supporting staff, in conjunction with a PAL or analysis and mapping procedures for non-accredited levees process, needs to be captured under a funded mapping project to update the levee-related flood hazard on the FIRM. These projects can be funded solely to update the levee hazard or can be done in conjunction with a larger study effort for the flooding source, county, or watershed.

On the FEMA Mapping Information Platform (MIP), a levee purchase option is available for funded projects to capture pertinent levee information. This purchase includes several tasks available for levees, including Levee Data Capture, Analysis and Mapping Procedure for Non-Accredited Levees Data Capture, and associated QA/QC and Validation Tasks. The main tasks can be defined as follows:

- **Levee Data Capture Task:** Under this task, the assigned Project Team member or partner captures levee data certification submittals, new PAL offers, and Natural Valley Concurrence letters (if the full levee deficiency based analysis workflow was not applied). For FEMA-funded mapping projects, this task is intended for non-engineering modeling data only because models are to be stored separately in the Hydraulics Data Capture and/or Hydrology Data Capture Tasks in the MIP.
- **Levee Analysis and Mapping Procedures Data Capture Task:** Under this task, the assigned Project Team member or partner captures data useful to evaluate the appropriate levee analysis and mapping approach discovered during the process of Identification and Plan Preparation concluding with a written plan for the analysis and mapping procedure of the non-accredited levee system. The team member or partner should document the Natural Valley Concurrence under the Levee Data Capture task if the levee analysis and mapping procedures plan preparation was not funded.

The Levee Data Capture task can be utilized to capture submitted levee data that includes levee accreditation data or levee structural, operational, or maintenance data informing the analysis and mapping procedure approaches of a non-accredited levee system that can be retrievable under the case number. The Levee Analysis and Mapping Procedure Data Capture Task can be utilized to capture Local Levee Partnership Team (LLPT) meeting materials, data collected, initial data analyses, and written plan of the mapping path forward.

More detailed information on levee-related data storage is provided in, but may not be limited to, the FEMA guidance documents, and technical references listed below.

- [MIP User Guidance](#)
- Guidance Document No. 12, [Guidance for Flood Risk Analysis and Mapping: National Flood Hazard Layer \(NFHL\)](#)
- Guidance Document No.46, [Guidance for Flood Risk Analysis and Mapping: Data Capture - General](#)
- Guidance Document No. 51, [Guidance for Flood Risk Analysis and Mapping: Data Capture – Workflow Details](#)
- Guidance Document No. 56, [Guidance for Flood Risk Analysis and Mapping: Mapping Information Platform \(MIP\)](#)

- [Data Capture Technical Reference](#)
- [Flood Insurance Rate Map \(FIRM\) Panel Technical Reference: Format for Flood Insurance Rate Maps](#)
- [Flood Insurance Study \(FIS\) Report Technical Reference: Preparing FIS Reports](#)
- [Domain Tables Technical Reference: FEMA Spatial Databases](#)

The MIP User Guidance is accessible from the User Guides and Documentation page on the MSC Web Portal. Guidance Document Nos. 12, 46, 51, and 56 are accessible from the previously referenced FEMA Guidelines and Standards for Flood Risk Analysis and Mapping webpage. The Technical References are available from the previously referenced FEMA Technical References webpage.

4. Accredited Levee Systems

FEMA analyzes and maps the flood hazards associated with levee systems based on the information provided by other Federal agencies, levee owners, and/or communities. Accredited levee systems are depicted as reducing the base flood hazard on a Flood Insurance Rate Maps (FIRM) if FEMA has been provided with documentation and certified data that meets the requirements of 44 CFR 65.10, including an adopted operation, maintenance and emergency preparedness plan provided by the community or other qualified entity seeking accreditation. This information can be submitted to FEMA at any time including through the Flood Risk Project study process, PAL process, or through the MT-2 process.

**This Document Has Been Superseded.
For Reference Only**

Accreditation can only be considered for an entire levee system which meets the full requirements of 44 CFR 65.10. As noted in Chapter 2 of this guidance, a levee system is defined as

A flood hazard-reduction system that consists of one or more levee segments/reaches and other features such as floodwalls and pump stations, which are interconnected and necessary to ensure exclusion of the design flood from the associated hydraulically independent levee impacted area, and which are constructed and operated in accordance with sound engineering practices.

Because the levee system must be considered hydraulically independent, failure of any portion of the system will only adversely impact the system itself and not any surrounding areas or levee systems. See Figure 1.

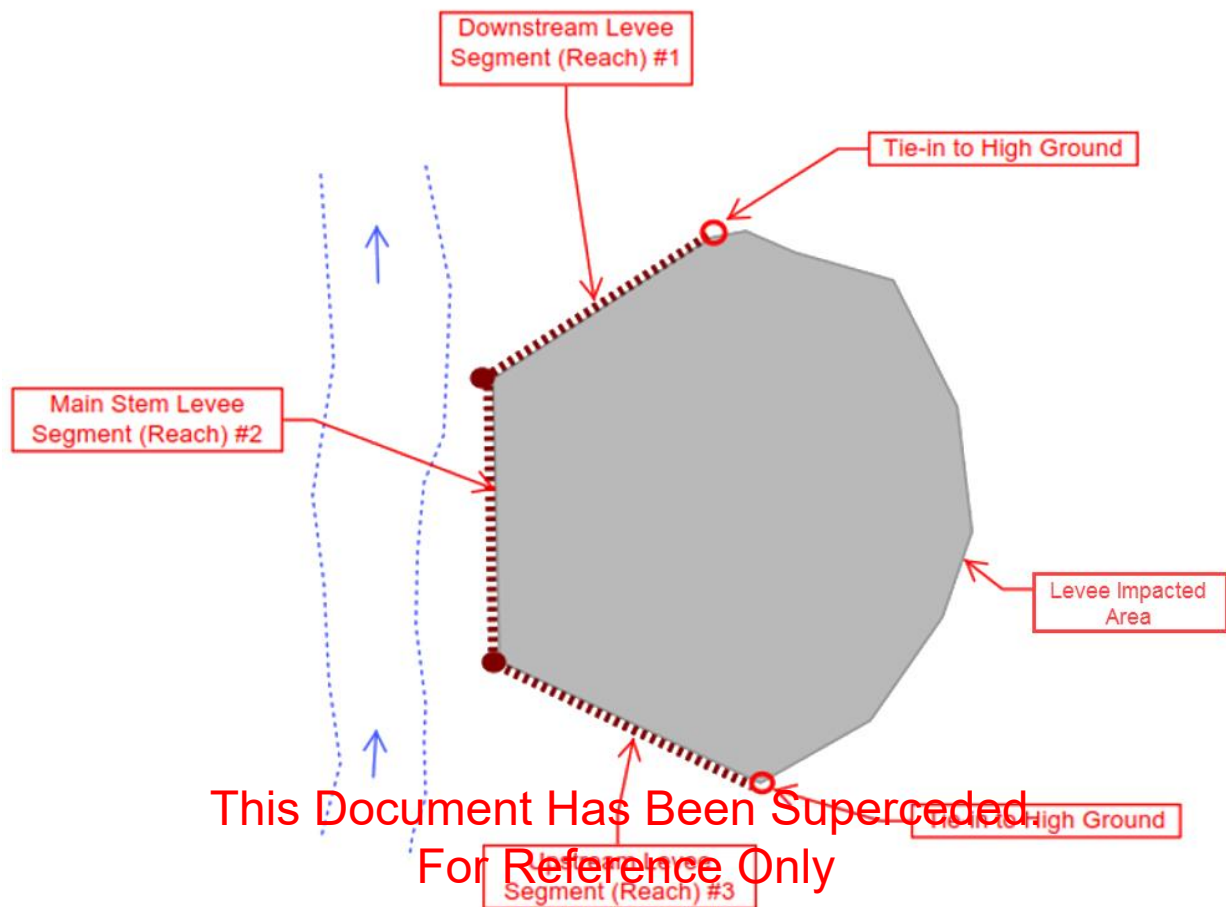


Figure 1: Example Levee System A

Levee System A is a typical example of a main stem levee with both upstream and downstream levees extending to high ground. The levee impacted area is shown in gray shading and represents the area which would be inundated during the base flood if the levee system fails to provide flood hazard reduction for the base flood. For an accredited levee system, the levee impacted area would be shown as Zone X (shaded) and labeled with the “Area with Reduced Flood Risk due to Levee” note on the Flood Insurance Rate Map.

For a levee system to be considered eligible for accreditation, the structure must first be identified as a levee system and meet the following minimum criteria:

- Meets the definitions of a levee and levee system, as defined in 44 CFR 59.1
- Has an identifiable owner
- Is operated, maintained, and inspected as a levee
- Is hydraulically independent from other levee systems or flood control structures

- Meets full requirements of 44 CFR 65.10

Unless designed as a ring levee, a levee system's requirements should also include that the levee system tie into natural high ground at either end of the system. High ground will be considered as topography that has not been revised due to manmade influences and should conform to the existing topography including no side slopes or heights outside of the typical terrain in the area. High ground should be sufficient to provide a stable foundation for the levee system to meet the structural requirements of 44 CFR 65.10 at both upstream and downstream tie-ins. For certain situations, it may not be feasible for the downstream end of a levee to tie into high ground. There may also be certain levee conditions, such as levees in urban or coastal areas where they do not tie-in to natural high ground. These situations will need to be coordinated and approved by the FEMA Regional Office and in coordination with FEMA Headquarters. Accreditation may still be considered for certain situations as described in Section 4.2 of this chapter.

4.1. 44 CFR 65.10 Requirements

Regarding the NFIP, FEMA will only recognize the flood hazard and risk mapping efforts of those levee systems that meet and continue to meet the requirements of 44 CFR 65.10. Technical data submitted to meet 44 CFR 65.10(b) requirements must be certified by a registered PE. Additionally, the accreditation package must be certified by a P.E. in its entirety to ensure that all 44 CFR 65.10 elements, topographic information, as well as the hydrology and hydraulics (H&H), as updated as warranted, are consistent with the information that is the basis of accrediting the levee on the FIRM. For accreditation, a levee system must meet all the requirements listed below. It should be noted that FEMA's analysis and mapping procedures for non-accredited levee systems (see Chapter 6--Non-accredited Levee Systems), necessitate that most requirements of 44 CFR 65.10 be met.

4.1.1. FREEBOARD

The purpose of freeboard is to acknowledge and consider the uncertainties associated with the H&H analysis and to minimize damages and threat to life and property. The freeboard requirements vary if the levee system lies within a riverine area or a coastal area. The appropriate requirements will be determined by the modeling method used for analysis. Coastal modeling should only be considered if the available fetch of the waterbody is 0.5 miles or greater.

4.1.2. RIVERINE FREEBOARD

The riverine freeboard requirements are stated in 44 CFR 65.10(b)(1)(i) and states the following:

Riverine levees must provide a minimum freeboard of three feet above the water-surface level of the base flood. An additional one foot above the minimum is required within 100 feet in either side of structures (such as bridges) riverward of the levee or wherever the flow is constricted. An additional one-half foot above the minimum at the upstream end of the levee, tapering to not less than the minimum at the downstream end of the levee, is also required.

The freeboard shall be based on the difference between the top of levee elevation to the elevation and the BFE at the riverside of the levee. A current top of levee survey or certified as-built plans should accompany any documentation regarding the freeboard requirement for a levee system. Older data may be accepted if accompanied with a statement from the certifying engineer that the older survey data still reflects current top levee conditions for the levee.

The levee shall tie into high ground at both the upstream and downstream end and maintain the required minimum freeboard at the tie into high ground. There may be cases in which high ground itself may not have the required freeboard at the tie-in location. If the tie into high ground cannot meet the minimum freeboard requirements within the vicinity of the levee, the levee can still be considered for meeting freeboard if the high ground lies above the BFE at the tie-in location of the levee. In some geographic areas, levee systems are designed to end in the absence of high ground at the downstream end. In these cases, the levee system may still be considered for accreditation as described in Subsection 4.2.1 of this guidance.

The levee freeboard should be determined based on the effective hydrologic and hydraulic models. New hydrology or hydraulics may be introduced for evaluation of freeboard as part of a FEMA initiated study, LOMR or Conditional Letter of Map Revision (CLOMR) to be evaluated by FEMA prior to consideration for accreditation. If during collection of data for accreditation it is determined that the effective BFEs are incorrect (too low), it is incumbent on the P.E. to provide updated information to FEMA through the MT-2 process such that the levee can be determined to reduce risk against the current base flood.

**This Document Has Been Superseded.
For Reference Only**

The tapering requirement for the additional 0.5-foot freeboard requirement at upstream end of levee system will be determined perpendicular to the flow of the base flood event and to help prevent overtopping at the structure. All aspects of levees, including mainline and tributary levees, are subject to an additional 0.5 feet of freeboard if they are perpendicular to flow at upstream end of levee. See Figure 2.

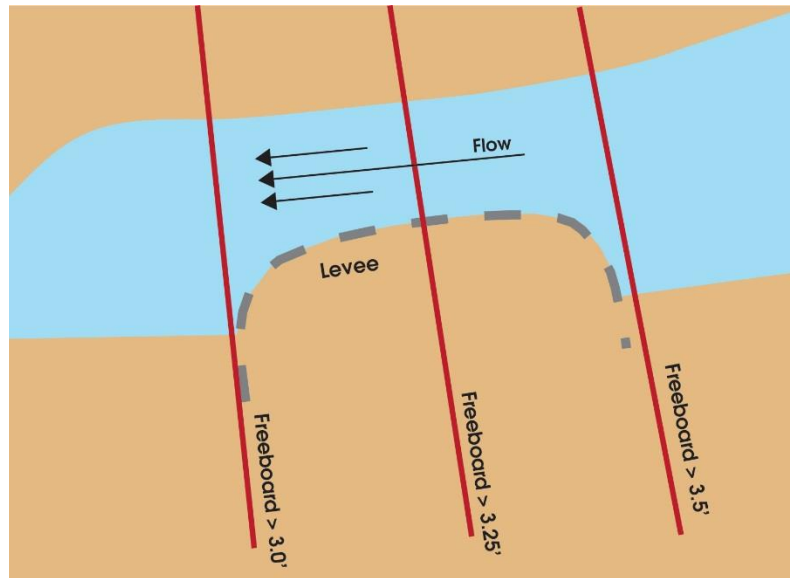


Figure 2: Freeboard Determination

The tapering requirement was implemented with the understanding that there is increased risk of overtopping at the upstream end of a levee and this risk diminishes toward the downstream end of the levee. The freeboard tapering is to ensure the initial levee overtopping occurs at the least hazardous location. Situations may arise where it may not be necessary to carry the full length of the taper to the downstream end if it can be demonstrated that the downstream risk on the landside of the levee system is negligible. In addition, there are some circumstances in which the upstream end and downstream end of the levee are indistinguishable and the freeboard tapering requirement may not apply. This may include levees along stillwater bodies or large rivers where velocities are slow and there is no change in water-surface elevation along the length of the levee system. Data to support these circumstances must be provided by the certifying engineer for this requirement.

The additional 1.0 foot of freeboard around structures is needed for any areas that constrict the natural flow of the river, such as bridges or culverts perpendicular to the flow. The 100 feet on either side of the structure shall be considered from the furthest upstream and downstream point of the structure that influences the flow, not the center of the structure. See Figure 3.

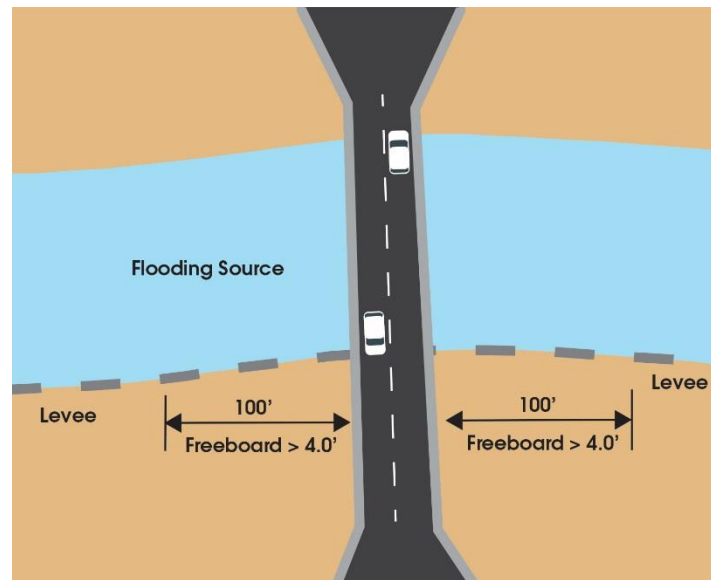


Figure 3: Freeboard Near Structures

If a structure is located at the upstream end of a levee system, the required freeboard shall be 4.0 feet (not a cumulative 4.5 feet) as the variability in flow at the upstream end of the levee and around structures has redundant uncertainties. In certain instance, it may be advantageous for the levee to have an additional half foot where debris or ice flow may incur additional flood risk or where overtopping at the structure needs to be avoided.

**This Document Has Been Superseded.
For Reference Only**

The additional freeboard requirement around structures may be waived if the certifying engineer can demonstrate that the structure does not influence the flow pattern of the base flood, or the overtopping would not result in structure failure at that location. Possible considerations may include demonstrating the low chord of a bridge is above the base flood plus minimum freeboard requirement as well as the related embankments outside the floodplain. Debris and ice accumulation would need to be addressed before the exception is granted. In certain situations, FEMA may request additional analyses.

Freeboard must also take into account the impacts of settlement and subsidence for completeness of this section as described under 44 CFR 65.10(b)(5).

Riverine Freeboard Exceptions

Exceptions of the freeboard requirement for levees in a riverine area are stated in 44 CFR 65.10(b)(1)(ii), which states the following:

Occasionally, exceptions to the minimum riverine freeboard requirement described in paragraph (b)(1)(i) of this section, may be approved. Appropriate engineering analyses demonstrating adequate protection with a lesser freeboard must be submitted to support a request for such an exception. The material presented must evaluate the uncertainty in the estimate base flood elevation profile and include, but not necessarily be limited to an

assessment of the statistical confidence limits of the 100-year discharge; changes in the stage-discharge relationships; and the sources, potential, and magnitude of debris, sediment, and ice accumulation. It must be also shown that the levee will remain structurally stable during the base flood when such loading considerations are imposed. Under no circumstances will freeboard of less than two feet be accepted.

Based on the requirements laid forth in 44 CFR 65.10(b)(1)(ii), the levee must demonstrate it can meet the following items of the freeboard exception process:

- Assessment of the statistical confidence limits of the 1% annual-chance discharge
- Assessment of the changes in stage discharge relationships
- Assessment of the sources, potential, and magnitude of debris, sediment, and ice accumulation
- Stability analysis indicating levee will remain structurally stable during the base flood when additional loading considerations required by the uncertainty analysis are imposed

Statistical Confidence Limits of the 1% annual-chance Discharge

A statistical analysis should be performed demonstrating the conditional non-exceedance probability is 95% or greater for the base flood.

FEMA will accept an analysis of the upper 5% confidence limits of the base flood discharge or 0.2% annual-chance event, whichever is greater. Additional analyses may be accepted pending FEMA concurrence.

**This Document Has Been Superseded.
For Reference Only**

Changes in Stage Discharge Relationships

An evaluation should be performed on the uncertainty due to changes to the stage-discharge relationship of the water body. This would include physical conditions that may change the relationship between the stage and discharge rating curve over time. It is suggested the certifying engineer utilize the appropriate USACE guidelines to demonstrate this requirement.

Sources, Potential, and Magnitude of Debris, Sediment, and Ice Accumulation

An analysis should be done demonstrating that any debris, sediment, and ice accumulation would have a negligible impact on the required freeboard.

Stability Analysis at Most Critical Section

A stability analysis should be done that conforms to the requirements laid out under 44 CFR 65.10(b)(4) demonstrating the levee will remain structurally stable with the reduced freeboard.

4.1.3. COASTAL FREEBOARD

The coastal freeboard requirements are stated in 44 CFR 65.10(b)(1)(iii), which states the following:

For coastal levees, the freeboard must be established at one foot above the height of the one percent wave or the maximum wave runup (whichever is greater) associated with the 100-year stillwater surge elevation at the site.

To show that a levee system provides base flood hazard reduction in a coastal area, the top of the levee must be equal or greater than the highest value of the following:

1. Two (2) feet above the base flood total stillwater storm surge elevation including wave setup;
2. One (1) foot above the base flood wave crest elevation; or
3. One (1) foot above the maximum base flood wave runup elevation.

The stillwater surge elevation shall be considered the water level in the absence of waves but with all other processes present. This includes the stillwater elevation of the base flood event plus a wave setup component. The wave setup is defined as the increase in mean water level above the stillwater level due to momentum transfer to the water column by waves that are breaking or otherwise dissipating their energy. Wave setup may be included in the FIS provided stillwater elevations if coupled 2D wave and surge modeling has been performed for the coastal study. If coupled 2D wave and surge modeling has not been performed wave setup may be calculated and added to the stillwater separately. Care should be taken to ensure the proper values are being used to evaluate coastal levee freeboard.

Wave runup is the vertical extent of the wave uprush on a beach or structure due to the breaking waves as shown in Figure 4.

**This Document Has Been Superseded.
For Reference Only**

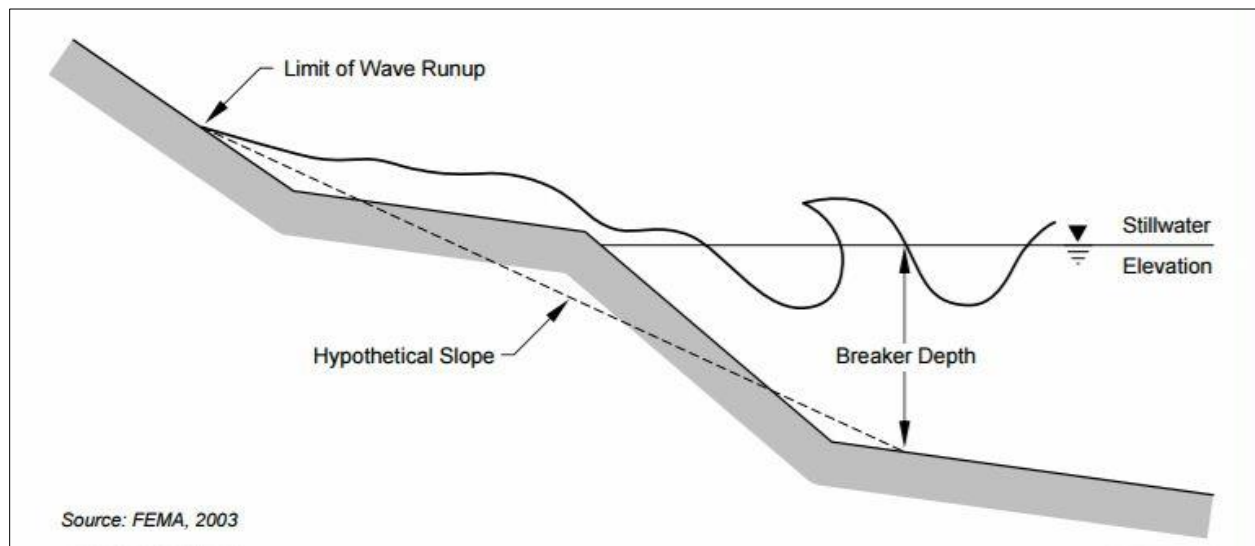


Figure 4: Wave Runup

Commonly used methods can include TAW, DIM, ACES, and CSHORE to calculate the wave runup. As stated, 44 CFR §65.10(b)(1)(iii) requires the maximum wave runup elevation. The maximum wave runup is the statistical highest wave runup attained by a group of irregular waves. The most

frequently modeled wave runup heights are the mean (R_{mean}) and the runup exceeded by 2% of the wave runup values attained by a group of irregular waves ($R_{2\%}$). Depending on the output of the method employed, one of the following conversion factors will need to be applied to calculate the maximum wave runup value required for freeboard determination:

1. $R_{\text{max}} = R_{\text{mean}} * 2.87$
2. $R_{\text{max}} = R_{2\%} * 2.87/2.23 = R_{2\%} * 1.29$

The freeboard shall be evaluated using the 1% total stillwater, the BFE on the FIRM, or the maximum wave runup elevation and the effective coastal model. As the 1% total stillwater and the maximum wave runup elevations may not be directly stated on the FIRM or in the FIS Report, these values must be derived utilizing the effective coastal modeling data. New wave runup analysis may be needed at the levee location if not including in the effective coastal study or the coastal levee is recently constructed. New coastal modeling may be introduced for evaluation of freeboard, but any new or updated models must be submitted as part of a LOMR or CLOMR to be evaluated by FEMA prior to incorporation. If the proposed model output is more conservative (BFE, velocities, duration, etc.) than the effective, the model results may be used without a LOMR or CLOMR review, pending FEMA concurrence.

Coastal Freeboard Exceptions

Exceptions to the freeboard requirement for levees in a coastal area are stated in 44 CFR 65.10(b)(1)(iv), which states the following:

**This Document Has Been Superseded.
For Reference Only**

Occasionally, exceptions to the minimum coastal levee freeboard requirement described in paragraph (b)(1)(iii) of this section, may be approved. Appropriate engineering analyses demonstrating adequate protection with a lesser freeboard must be submitted to support a request for such an exception. The material presented must evaluate the uncertainty in the estimated base flood loading conditions. Particular emphasis must be placed on the effects of wave attack and overtopping on the stability of the levee. Under no circumstances, however, will a freeboard of less than two feet above the 100-year stillwater surge elevation be accepted.

An analysis must be provided that evaluates the uncertainty in the base flood loading and demonstrates the stability of the levee will not be compromised with the acceptance of a lesser freeboard. Any Freeboard exceptions would need to be concurred upon by both the FEMA Region and headquarters.

4.1.4. CLOSURES

The closures requirements are stated in 44 CFR 65.10(b)(2), which states the following: “All openings must be provided with closure devices that are structural parts of the system during operation and design according to sound engineering practice.”

A closure shall be considered for any opening within the levee system and shall be designed and constructed in accordance with sound engineering practices. These openings may include transportation crossings, pipelines, utility conduits, culverts, or similar features beneath or within a levee that provide hydraulic connectivity between the flooding source and the levee impacted area. Design of these closure structures should follow standard engineering practice and established guidance, such as USACE engineering design and construction manuals USACE EM 1110-2-1913, Engineering and Design, DESIGN AND CONSTRUCTION OF LEVEES. All features should be evaluated for their potential damage which would negatively impact the integrity of the flood hazard reduction system and could lead to failure. Data and documentation used to evaluate these features should be provided by the certifying engineer or federal agency experienced in the design and construction of levees. All considered closures must have a documented and properly designed closure device and procedure in the levee system operation and maintenance manual that meets the requirements laid out for Operation Plans and Criteria under 44 CFR 65.10(c). Closures that require manual intervention, such as road openings, gate structures and manual operation for closures on pipe penetrations, must have a warning system in place that allows adequate time to respond.

Automatic closures must be a structural part of the levee system and designed to close openings without human intervention. An Operation Plan and Criteria for automatic closures at transportation crossings must include traffic control to prevent damage to the closure from vehicle strikes. An Operation Plan must also include provision for manual backup for the activation of automatic closures.

This Document Has Been Superseded.
For Reference Only

Temporary closures which are not a structural part of the levee may be used as a closure device for any areas where the closure invert is above the BFE. Examples of temporary closures include sandbags, manufactured closures, and earthen closures. Please note that any kind of inflatable device that can be punctured are not allowed at any time. Temporary closures cannot be used for meeting freeboard requirements if the minimum invert elevation of the closure is below the base flood elevation.

4.1.5. EMBANKMENT PROTECTION

The embankment protection requirements are stated in 44 CFR 65.10(b)(3), which states the following:

Engineering analyses must be submitted that demonstrate that no appreciable erosion of the levee embankment can be expected during the base flood, as a result of either currents or waves, and that anticipated erosion will not result in failure of the levee embankment or foundation directly or indirectly through the reduction of the seepage path and subsequent instability. The factors to be addressed in such analyses include but are not limited to: expected flow velocities (especially in constricted areas); expected wind and wave action; ice loading; impact of debris; slope protection techniques; duration of flooding at various stages and velocities; embankment and foundation materials; levee alignment, bends, and transitions; and levee side slopes.

Existing embankment protection must be identified along the entire levee system. It must be demonstrated that during the conditions associated with the base flood event that the duration of the event and erosion will not compromise the stability of the levee. Flow velocities and duration of flooding used for evaluation, at a minimum, must coincide with effective hydraulic model associated with the BFE listed on the FIRM.

For coastal levees, wave runup should be addressed each time VE zones are mapped in the area or a fetch of 0.5 mile or greater is presented along the waterbody. Appropriate analyses should be presented documenting the wave impacts along the levee. If the fetch is less than 0.5 mile or circumstances are present that minimize the impacts of waves along the levee, the certifying engineer should submit a statement and documentation justifying this position.

Ice loading should be addressed when the certifying engineer believes it pertains. The certifying engineer should include a statement and justification if ice loading does not apply to the levee system.

If a previous analysis regarding the adequacy of the embankment protection is still applicable to current conditions, it may be used in lieu of providing a new analysis. A registered P.E. would need to provide the previous data and documentation and certify that it still applies to current conditions.

4.1.6. EMBANKMENT AND FOUNDATION STABILITY

The embankment and foundation stability requirements are stated in 44 CFR 65.10(b)(4), which states the following:

**This Document Has Been Superseded
For Reference Only**

Engineering analyses that evaluate levee embankment stability must be submitted. The analyses provided shall evaluate expected seepage during loading conditions associated with the base flood and shall demonstrate that seepage into or through the levee foundation and embankment will not jeopardize embankment and foundation stability. An alternative analysis demonstrating that the levee is designed and constructed for stability against loading conditions for Case IV as defined by US Army Corps of Engineers (COE) manual, "Design and Construction of Levees" (EM 1110-2-1913, Chapter 6, Section II) may be used. The factors that shall be addressed in the analyses include: Depth of flooding, duration of flooding, embankment geometry and length of seepage path at critical locations, embankment and foundation materials, embankment compaction, penetrations, other design factors affecting seepage (such as drainage layers), and other design factors affecting embankment and foundation stability (such as berms).

To meet the requirements shown above, the certifying engineer should include a seepage and stability analysis. An example method is outlined in USACE EM 1110-2-1913. This should include an examination of component material characteristics of the foundation and levee embankment, compaction design, seepage at critical locations (including at the levee tie-in locations), and penetrations. It is recommended that data including information on soil borings and laboratory results be included in the documentation for this requirement. Additionally, the impact of any structure, including but not limited to bridges and roads crossing the levee must be addressed.

If a previous seepage and stability analysis was done for the levee system, it may be used if the certifying engineer states that the findings and data are still representative of current conditions for the levee system. A recent soil boring may be required to demonstrate the current composition of the levee is representative of the original analysis.

4.1.7. SETTLEMENT

The settlement requirements are stated in 44 CFR 65.10(b)(5), which states the following:

Engineering analyses must be submitted that assess the potential and magnitude of future losses of freeboard as a result of levee settlement and demonstrate that freeboard will be maintained within the minimum standards set forth in paragraph (b)(1) of this section. This analysis must address embankment loads, compressibility of embankment soils, compressibility of foundation soils, age of the levee system, and construction compaction methods. In addition, detailed settlement analysis using procedures such as those described in the COE manual, "Soil Mechanics Design – Settlement Analysis" (EM 1100-2-1904) must be submitted.

An analysis or calculation utilizing the composition of the levee to determine current and future settlement is required for areas subject to both coastal and riverine flooding to demonstrate the current and future impacts of settlement on the freeboard. This analysis may leverage existing data if still applicable regarding calculations and composition of the levee. The analysis must address any future loss of freeboard associated with settlement over time, including subsidence impacts.

**This Document Has Been Superseded
For Reference Only**

The settlement requirement is to determine the impacts on freeboard over time due to the natural settling of a levee. If a levee is not newly constructed, has not been improved and the certifying engineer can demonstrate that the minimum freeboard will be maintained when all current and future settlement is considered, a statement from the certifying engineer may suffice instead of a settlement analysis. If a levee cannot meet these requirements, a settlement analysis is still required.

4.1.8. INTERIOR DRAINAGE

The interior drainage requirements are stated in 44 CFR 65.10(b)(6), which states the following:

An analysis must be submitted that identifies the source(s) of such flooding, the extent of the flooded area, and, if the average depth is greater than one foot, the water-surface elevation(s) of the base flood. This analysis must be based on the joint probability of interior and exterior flooding and the capacity of facilities (such as drainage lines and pumps) for evacuating interior floodwaters.

Interior flooding can occur within the levee impacted area when the exterior flood stages do not permit gravity flow, and/or runoff into the levee impacted area may exceed the capacity of interior drainage systems. In many situations, this flooding may be as damaging as flooding from the riverward side of the levee. Interior drainage systems associated with levee systems usually include

storage areas, gravity outlets, pumping stations, or a combination thereof. An analysis must identify and demonstrate the modes and potential runoff paths contributing to the levee impacted area. This may require, but not be limited to, an analysis of runoff, seepage inflow, streams, coastal overwash, pump stations, detention/retention ponds, storm sewers, and other stormwater management facilities based on the judgement of the certifying engineer. The certifying engineer should evaluate and certify all data associated with the flooding sources within the levee impacted area related to handling the anticipated rainfall, runoff and seepage landward of the levee and identify any ponding areas or streams within this area. Any flooding with an average depth greater than one foot must be identified with the relevant BFE. A work map should be provided indicating the limits of flooding based on the interior drainage analysis.

The interior drainage analysis should be done utilizing a FEMA approved hydrologic and hydraulic model. A list of these acceptable models can be found at <https://www.fema.gov/flood-maps/products-tools/numerical-models>. Any analyses done with a model that has not been accepted by FEMA will not be considered as valid under this requirement and results cannot be mapped.

The analysis should include a joint probability analysis of events on the interior and exterior of the levee, with the most conservative combination used for final analysis. At a minimum, the joint probability analysis must include the 1% annual-chance event. In lieu of a joint probability analysis, the engineer may evaluate several scenarios rather than identify a probability-based based flood event, the most conservative combination should be used for final analysis. Comparable methodology is also available in appropriate USACE guidelines.

**This Document Has Been Superseded.
For Reference Only**

If a flooding source on the landside of the levee contributes to the interior drainage analysis but not previously identified on the FIRM, an analysis of the flooding source should be done by the certifying engineer and submitted as part of the interior drainage analysis. The analysis should meet relevant FEMA Guidance and Standards (G&S) regardless of the drainage area size, but the associated inundation areas on the workmap provided by the certifying engineer do not need to meet FEMA G&S for mapping. However, FEMA must convert inundation areas into flood hazard areas on the FIRM, as appropriate, in accordance with FEMA G&S and in coordination with the impacted community.

If a previous analysis of interior drainage was performed and is still applicable to current hydrologic and hydraulic conditions, it may be used in lieu of providing a new analysis. A registered P.E. must certify the previous data and documentation represent current interior drainage conditions and associated flood hazards.

4.1.9. OTHER DESIGN CRITERIA

Other design criteria are stated in 44 CFR 65.10(b)(7), which states the following:

In unique situations, such as those where the levee system has relatively high vulnerability, FEMA may require that other design criteria and analyses be submitted to show that the levees provide adequate protection. In such situations, sound engineering practice will be the standard on which FEMA will base its determinations. FEMA will also provide rationale for requiring this additional information.

FEMA reserves the right to request additional information pertaining to the purpose, design, or construction, of the levee systems under unique situations that are not covered under 44 CFR 65.10(b)(1) through (6). These situations may include levees with a higher landward risk, levee systems that cannot tie into high ground and require additional analyses demonstrating that they meet and continue to meet design requirements and the structural integrity would not be compromised when exposed to the base flood event, or unique characteristics that cannot be adequately evaluated under traditional methods. FEMA will coordinate with the levee owner in writing with notification and justification for additional design requirements prior to final accreditation submission and provide adequate time for preparation of additional material.

4.1.10. PLANS FOR MAINTENANCE, OPERATION, AND EMERGENCY PREPAREDNESS

A levee submittal must include detailed plans that describe the operation, maintenance, and emergency preparedness activities to be implemented. These plans must be officially adopted and be under the jurisdiction of Federal or State agencies, an agency created by Federal or State law, or an NFIP participating community. An officially adopted plan is a plan that is signed by the Chief Executive Officer (CEO) or highest elected official of the community or the appropriate head of the agency or entity that is accepting the ultimate responsibility for all the tasks and actions listed in those plans. All plans must be prepared for the specific levee system for which accreditation is being evaluated. Generic plans that include addendums covering specific requirements may be accepted, with FEMA concurrence.

**This Document Has Been Superseded.
For Reference Only**

Operation Plans

The criteria for operation plans are described in 44 CFR 65.10(c), which states the following:

All closure devices or mechanical systems for internal drainage, whether manual or automatic, must be operated in accordance with an officially adopted operation manual, a copy of which must be provided to FEMA by the operator when levee or drainage system recognition is being sought or when the manual for a previously recognized system is revised in any manner. All operations must be under the jurisdiction of a Federal or State agency, an agency created by Federal or State law, or an agency of a community participating in the NFIP.

(1) Closures. Operation plans for closures must include the following:

(i) Documentation of the flood warning system, under the jurisdiction of Federal, State, or community officials, that will be used to trigger emergency operation activities and demonstration that sufficient flood warning time exists for the completed operation of all

closure structures, including necessary sealing, before floodwaters reach the base of the closure.

(ii) A formal plan of operation including specific actions and assignments of responsibility by individual name or title.

(iii) Provisions for periodic operation, at not less than one-year intervals of the closure structure for testing and training purposes.

(2) Interior drainage systems. Interior drainage systems associated with levee systems usually include storage areas, gravity outlets, pumping stations, or a combination thereof. These drainage systems will be recognized by FEMA on NFIP maps for flood protection purposes only if the following minimum criteria are included in the operation plan:

(i) Documentation of the flood warning system, under the jurisdiction of Federal, State, or community officials, that will be used to trigger emergency operation activities and demonstration that sufficient flood warning time exists to permit activation of mechanized portions of the drainage system.

(ii) A formal plan of operation including specific actions and assignments of responsibility by individual name or title.

(iii) Provision for manual backup for the activation of automatic systems.

(iv) Provisions for periodic inspection of interior drainage systems and periodic operation of any mechanized portions for testing and training purposes. No more than one year shall elapse between either the inspections or the operations.

(3) Other operation plans and criteria. FEMA may require other operating plans and criteria to ensure that adequate protection is provided in specific situations. In such cases, sound emergency management practice will be the standard upon which FEMA determinations will be based.

All items outlined in the operation plan must reflect current conditions of the levee system and must align with the certified activities covered in 44 CFR 65.10(b)(1) through (7). All discrepancies between existing conditions or operations must be resolved prior to the levee being accepted for accreditation.

If flood fighting activities are listed in an operation plan, it must be ensured that these activities are not necessary in order to meet the requirements of 44 CFR 65.10.

If sandbags or other nonstructural measures are to be used as closure devices, the operation plan must include the details for the storage, hauling, and placement of the required materials and equipment.

Portable pumps may be accepted as modes of alleviating flood risk associated with interior drainage if details of application, flood triggers and implementation are clearly laid out in the operation plan. Portable pumps should also be shown to be readily available and onsite.

Emergency Preparedness Plans

FEMA Standard (SID) 444 requires that the submittal for levee accreditation include a current emergency preparedness plan that must, at a minimum, be adopted by the community, include the area impacted by the levee system, and procedures for emergency operations and public evacuation, meeting the requirements of 44 CFR 65.10(c)(3). Although this plan may be included in the adopted operation plan, it may also be submitted as a separate document. The size and required detail of the submitted documentation is scalable and should be appropriate for the levee system. Many communities may already be familiar with similar planning efforts and may have the relevant information available in other forms. Provided the information is appropriate to meet these requirements, the document is not required to have the title “emergency preparedness plan”. Refer to the following documents for more information on preparing these plans and sample content and format for the plans:

- U.S. Department of Homeland Security, Emergency Preparedness Guidelines for Levees, A Guide for Owners and Operators, dated January 2018, website:
https://www.fema.gov/sites/default/files/2020-08/fema_emergency-preparedness-guidelines-for-levees_2018.pdf.

**This Document Has Been Superseded.
For Reference Only**

The Silver Jackets, Emergency Action Plan Guidebook, Version 4.0, dated November 2019, website:
https://www.mvp.usace.army.mil/Portals/57/docs/Operations%20Center/EAP_Combined_4_20_Nov19w_cover.pdf?ver=2020-08-27-141125-400.

- USACE EC 1110-2-6075, Inundation Maps and Emergency Action Plans and Incident Management for Dams and Levee Systems. Website is as follows and search by EC number:
<https://www.publications.usace.army.mil/>.
- FEMA, “CPG 101, Developing and Maintaining Emergency Operations Plans, Version 2”, dated November 2010, website:
<https://www.fema.gov/sites/default/files/2020-07/developing-maintaining-emergency-operations-plans.pdf>.
- FEMA, “Federal Guidelines for Emergency Action Planning for Dams”, dated July 2013, website:
https://www.fema.gov/sites/default/files/2020-08/fema_dam-safety_emergency-action-planning_P-64.pdf.

Maintenance Plans

The criteria for operation plans are described in 44 CFR 65.10(d), which states the following:

Levee systems must be maintained in accordance with an officially adopted maintenance plan, and a copy of this plan must be provided to FEMA by the owner of the levee system when recognition is being sought or when the plan for a previously recognized system is revised in any manner. All maintenance activities must be under the jurisdiction of a Federal or State agency, an agency created by Federal or State law, or an agency of a community participating in the NFIP that must assume ultimate responsibility for maintenance. This plan must document the formal procedure that ensures that the stability, height, and overall integrity of the levee and its associated structures and systems are maintained. At a minimum, maintenance plans shall specify the maintenance activities to be performed, the frequency of their performance, and the person by name or title responsible for their performance.

The maintenance activities and the frequency of their performance to maintain the levee's compliance with requirements of 44 CFR 65.10 and well documented. At a minimum, plans must address provisions for inspection of the levee and maintenance of all mechanical systems, such as closure devices, pumps, valves, and relief wells.

Certification Requirements

The criteria for certification of data are described in 44 CFR 65.10(e) which states the following:

Data submitted to support that a given levee system complies with the structural requirements set forth in paragraphs (b)(1) through (b)(7) of this section must be certified by a registered professional engineer. Also, certified as-built plans of the levee must be submitted. Certifications are subject to the definition given at §65.2 of this subchapter. In lieu of these structural requirements, a Federal agency with responsibility for levee design may certify that the levee has been adequately designed and constructed to provide protection against the base flood.

Certified as-built plans submitted must cover the entire levee system that is being considered for accreditation. The as-built plans should match levee features certified in design requirements under 44 CFR 65.10(b)(1) through (7). A new levee survey may be required if certified as-built plans are missing, or do not cover the entire length of the levee. The new survey must include all the necessary information for the review, including but not limited to topographic information, location and dimensions of all structures, pipes and utilities crossing the levee, and all the facilities that are part of the interior drainage system. If certified as-built plans are not available, the certifying engineer may also submit more recent plans conveying similar information if certified that they represent current conditions of the levee system.

In lieu of the structural requirements cited in 44 CFR 65.10(b)(1) through (7) a Federal agency with responsibility for levee design may certify that the levee has been adequately designed and constructed. Further details on this topic are shown under Subsection 4.2.2 (Other Federal Agency Accreditation Submittals).

Permits and Other State and Local Requirements

The submittal must adequately address all applicable Federal, State, and local laws regulations and requirements, including, but not limited to, Federal, State, and local floodplain management laws, environmental laws, and permit requirements. This requirement is the responsibility of the NFIP community. This can be verified through communication with the requester. A record of these communications must be kept in the FEMA project file for future reference.

4.2. Additional Levee Accreditation Considerations

Situations may arise during the evaluation of a levee system for accreditation that may warrant further discussion or evaluation of the specific situations. Some of the more common situations that may warrant additional considerations may include the following:

- Levees systems designed to end in the absence of high ground at the downstream end
- Considerations for review of accreditation packages from other Federal agencies
- Guidance for addressing continued accreditation of a levee system after it initially met the requirements of 44 CFR 65.10

4.2.1. LEVEL SYSTEM TIE-IN CONSIDERATIONS

Typically, levee systems are designed and constructed to tie into high ground at the upstream and downstream portions of the levee system. Unless they are designed as ring levees. In some geographic areas, levee systems are designed to end in the absence of high ground at the downstream end. If certain criteria are still met, these levees may be eligible for accreditation. Variations of these types of levee systems are described as follows:

- The most common scenario occurs when the downstream end of a levee system meets the 44 CFR 65.10 freeboard requirements, but it does not tie into high ground at this downstream end.
- A variation occurs when the downstream end of a levee system meets the freeboard requirements but ties into a non-accredited levee (see Chapter 6) or a non-levee reach (see Chapter 7), which is part of the entire levee system. In this case, the certifying engineer must provide certified data and documentation that meets requirements of 44 CFR 65.10 to demonstrate base flood hazard reduction in the leveed impacted area.

If a levee system designed to end in the absence of high ground at the downstream end meets the requirements of 44 CFR 65.10, the “levee impacted area” defined by a natural valley analysis would be shown on a FIRM as Zone X (shaded) overlaid with the appropriate SFHAs, as determined by interior drainage analyses and/or backwater flooding that comes around the downstream end of the levee system.

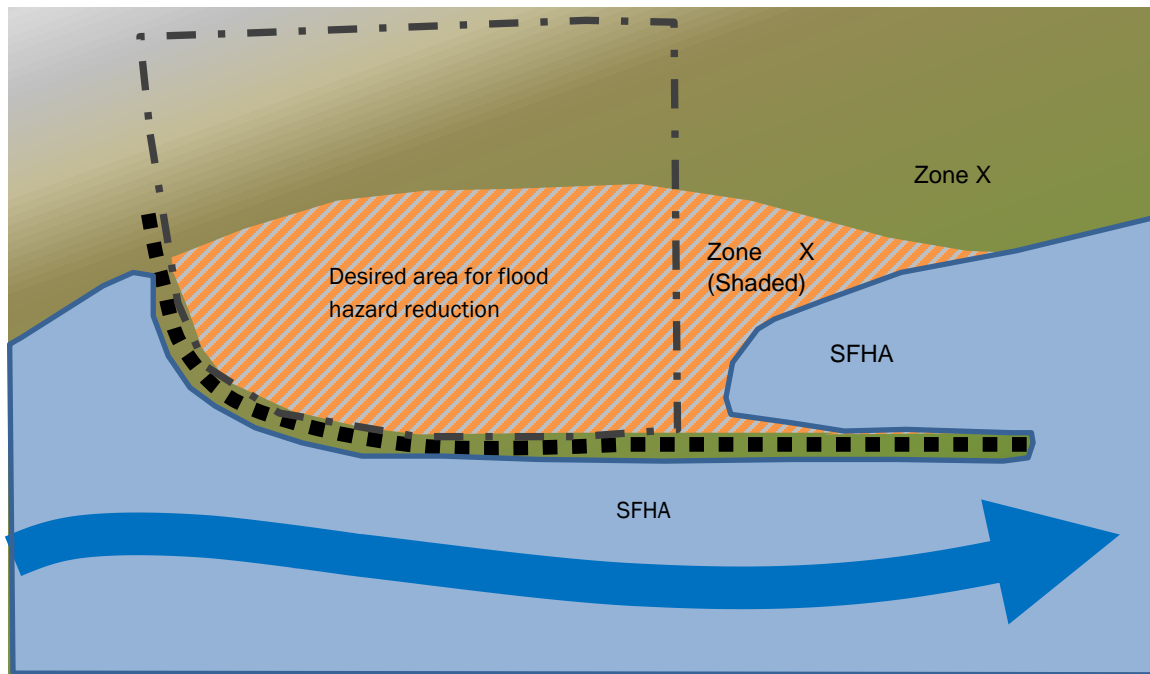


Figure 5: Levee System Designed to End in the Absence of High Ground

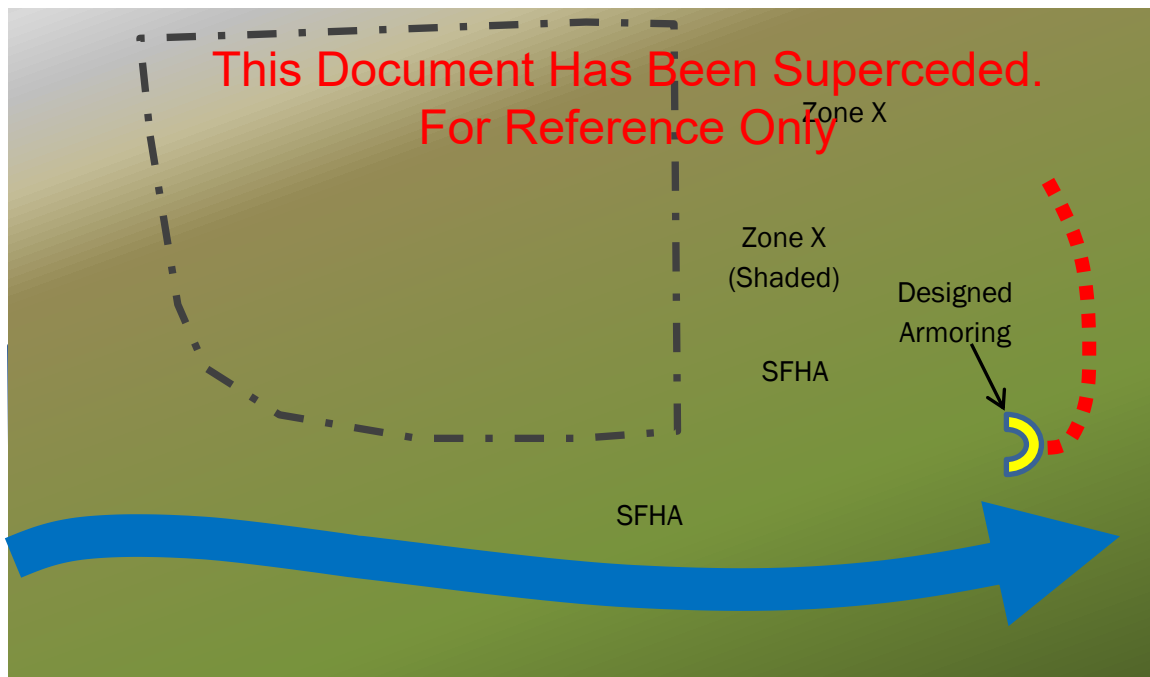


Figure 6: Levee System Tying into Non-Levee Reach

If a levee system designed to end in the absence of high ground at the downstream end does not meet the requirements of 44 CFR 65.10 but can be analyzed and mapped in accordance with the analysis and mapping procedures for non-accredited levees (See Chapter 6), the resulting flood hazard would be mapped as Zone D with the appropriate SFHA overlaid.

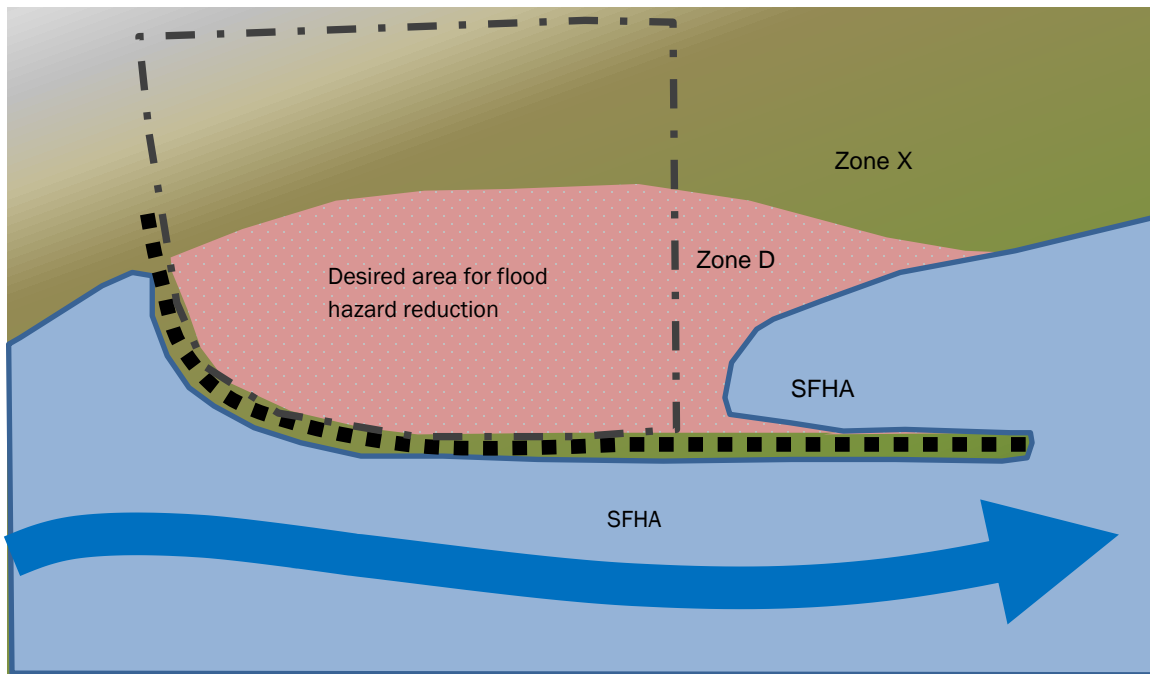


Figure 7: Non-Accredited Levee System

Before a levee system designed to end in the absence of high ground at the downstream end can be considered for accreditation or under the analysis and mapping procedures for non-accredited levees, the following three criteria must be met:

**This Document Has Been Superseded.
For Reference Only**

1. The levee system, including the downstream end, meets the full requirements defined in 44 CFR 65.10, except freeboard unless pursuing accreditation. But it will not be required to tie-in to high ground, which is required by 44 CFR 65.10.
2. The levee system be designed and constructed using sound engineering practices, and that the data certification specifically state that the downstream end of the levee system and the landward side exposed to any flooding conditions/loading be able to continue to meet design requirements and not “unravel” or result in the failure of the upstream levee reaches.
3. Any potential flooding that would come around the back, landward side of the downstream end of the levee be analyzed and mapped and shown on the FIRM as a SFHA.

For cases where the levee system ties into another levee or non-levee reach that has not been demonstrated to meet the requirements of 44 CFR 65.10, the certifying engineer must meet all the criteria above, as well as consider the situation where the other structure fails at the tie-in point and is analyzed with breach, overtopping, and/or natural valley analyses. The potential flooding from breaching, overtopping, or natural valley analyses on the non-accredited structure would be shown as SFHA, if this flooding creates backwater that impacts the landward side of the accredited levee system.

4.2.2. USE OF OTHER FEDERAL AGENCY INFORMATION IN SUPPORT OF ACCREDITATION SUBMITTALS

There may be instances when other Federal agencies provide information to FEMA in support of a community's request for levee accreditation. The federal agency certification requirements are cited at 44 CFR 65.10(e), which states the following:

In lieu of these structural requirements, a Federal agency with responsibility for levee design may certify that the levee has been adequately designed and constructed to provide protection against the base flood event.

The structural requirements are considered those listed in 44 CFR 65.10(b)(1) through (7) which are required to be certified by a registered P.E. However, if the accreditation submittal is provided by a Federal agency with responsibility for levee design, that agency may provide a recommendation for accreditation of the levee system, and FEMA may require additional supporting data and documentation, as appropriate.

In these cases, FEMA will perform a compliance review of the submitted data and documentation and may require a statement from the submitting Federal agency regarding recommendations for accreditation involving elements that do not directly align to the requirements for 44 CFR 65.10. Formally adopted operation, maintenance and emergency preparedness plans, and the most recent levee inspections are required to be submitted to FEMA for the entire levee system before FEMA will depict the levee system as accredited on a FIRM.

**This Document Has Been Superseded.
For Reference Only**

FEMA will review the formally adopted operation, maintenance and emergency preparedness plans to ensure that the requirements of 44 CFR 65.10(c) and (d) are met. In addition, the community or entity seeking accreditation will be required to provide interior drainage analyses and resulting inundation maps to meet the requirements of 44 CFR 65.10(b)(6) if that information was not provided by the Federal agency.

More information on coordination with other Federal agencies as well as a list of potential agencies involved in levee design and construction can be found in Chapter 8 of this document.

Use of USACE Information in Support of Accreditation Submittals

USACE and FEMA have a long history of exchanging information related to the identification of flood hazard areas behind levees for NFIP purposes, including hydrologic and hydraulic modeling as well as detailed information regarding a specific levee system's current condition. USACE has historically provided data to FEMA in support of levee accreditation through various means including through the flood risk study, MT-2, and PAL processes, in accordance with the requirements of 44 CFR 65.10(e). USACE also provided data to FEMA in accordance with EC 1110-2-6067, USACE Process for National Flood Insurance Program (NFIP) Levee System Evaluation, which expired on August 31, 2012, and which superseded prior USACE technical letters, and all other USACE policy memoranda related to evaluating levee systems with respect to FEMA accreditation under the NFIP. These evaluations provided direct findings for most of the requirements of 44 CFR 65.10. It should be noted that

USACE is transitioning away from utilizing this deterministic methodology and towards a risk-informed approach for assessing levee systems with respect to accreditation for the NFIP. Refer to USACE guidance, Engineering and Construction Bulletin (ECB), No. 2019-11, [Transition Guidance for Levee System Evaluations for the National Flood Insurance Program \(NFIP\)](https://www.wbdg.org/ffc/dod/engineering-and-construction-bulletins-ecb), for USACE's current guidance on this matter: <https://www.wbdg.org/ffc/dod/engineering-and-construction-bulletins-ecb>.

As referenced in Section 1.3.2, Flood Protection Structure Accreditation Task Force, USACE and FEMA have an agreement in place that specifies how information collected and assessed by USACE through their agency Levee Safety Program (Program) activities [levee inspection, screening level risk assessment, Semi-Quantitative Risk Assessment (SQRA), and Quantitative Risk Assessment (QRA)] can be used to inform accreditation for NFIP purposes. The intent is to create a working partnership between FEMA, USACE, levee sponsors and communities to reduce perceived redundancies, streamline the exchange of best available information, and ensure that levee sponsors and communities receive one consistent message and are not pointed back-and-forth between the two Federal agencies. Because the coordination process between FEMA and USACE continues to evolve and improve, as mandated in multiple legislative requirements, both agencies must effectively collaborate to implement activities involving USACE Program levees. The following paragraphs describe how information from USACE levee inspections, screening level risk assessments, SQRA, and QRAs are related to accreditation.

Levee inspections are the most frequent and familiar activity USACE performs on a levee system. Each time a USACE district conducts a levee inspection, it will identify where a levee segment meets or does not meet a specified subset of requirements in 44 CFR 65.10 as identified in the inspection checklist by providing a positive or negative finding. A positive finding is a conclusion by USACE that there is sufficient information to determine that specific criteria of 44 CFR 65.10 have been met. A negative finding is a conclusion by USACE there is sufficient information to determine that specific criteria of 44 CFR 65.10 have not been met. FEMA does not need to request additional information or documentation related to specific 44 CFR 65.10 criteria in which USACE has provided a positive or negative finding via an inspection, unless there is additional information indicating that this finding requires verification. Other information obtained from the inspections, such as identification of serious deficiencies, may also inform a NFIP levee accreditation decision. Therefore, it is important to consider the full inspection results and not just the limited identified 44 CFR 65.10 criteria. Inspections are performed on a levee segment basis and caution should be taken to ensure that inspection results are considered collectively, in addition to the results for all the levee segments for the levee system, when using inspection information to inform a levee accreditation decision. It will also be important to consider the most recent USACE risk assessment result for a levee system. At a minimum, the USACE district will notify FEMA directly when the inspection results in a negative finding for any of the criteria. It should be noted that USACE intends to no longer assign an overall inspection rating (Acceptable, Minimally Acceptable, and Unacceptable) to levees and will begin to transition away from such ratings. FEMA will consider USACE Program levee system inspection results (and corresponding risk assessment results as necessary) and will determine if additional coordination is needed with the community and the levee sponsor for NFIP mapping purposes.

USACE screening level risk assessments are a simplified, semi-quantitative risk assessment that relies on existing data, historical performance, engineering judgment, and consequence estimation to quickly characterize the relative risks posed by levees in terms of annual exceedance probability and potential risk to life and property. All levee screenings are performed using the web-based USACE Levee Screening Tool (LST). Levee screenings are performed on each levee segment, but results are rolled up to the levee system level. Screenings provide limited information, which can inform NFIP levee accreditation decisions but do not satisfy all the requirements of 44 CFR 65.10. Each time a USACE district conducts a levee screening, it will identify when a levee segment meets or does not meet a specified subset of requirements in 44 CFR Section 65.10 as identified in the LST by providing a positive, negative, or inconclusive finding. A positive finding will be given when it is determined that based on the screening information the specified criteria of 44 CFR 65.10 has been met. Positive findings are limited to specific criteria of 44 CFR 65.10 and are insufficient to make a complete levee accreditation recommendation. Levee sponsors and communities may use positive findings to meet certain criteria of 44 CFR 65.10 but will be responsible to provide to FEMA the remaining requirements for 44 CFR 65.10 in order for FEMA to accredit the levee system on a NFIP map. A negative finding will be given when it is determined that, based on the screening information, specific criteria of 44 CFR 65.10 has not been met. Negative findings are limited to specific criteria of 44 CFR 65.10. At a minimum, the USACE district will notify FEMA directly when a screening results in a negative finding for any of the 44 CFR 65.10 criteria. An inconclusive finding will be given when it is determined that, based on the screening information, there is insufficient information to determine whether or not that specific criteria of 44 CFR 65.10 has been met.

**This Document Has Been Superseded.
For Reference Only**

When using screening information to inform a levee accreditation decision, caution should be taken to ensure that screenings and the corresponding inspection results are used, presented, and considered collectively, along with the results for all the levee segments for the system. FEMA will consider the USACE Program levee screening results (and corresponding inspection results) and determine if additional coordination is needed with the community and the levee sponsor for NFIP mapping purposes.

Once a levee system undergoes a full USACE semi-quantitative or quantitative risk assessment (SQRA or QRA), the NFIP findings associated with a levee screening are no longer considered valid and cannot be used to fulfill any part of 44 CFR 65.10 requirements.

When USACE performs a SQRA or QRA, it will include a recommendation related to accreditation for the NFIP based on a probabilistic determination of levee performance, if a recommendation can be made. If the results of a SQRA or QRA have a sufficient level of assurance, USACE will either recommend or not recommend that the levee system be accredited for NFIP purposes. A levee system recommendation to accredit will only be provided when all segments of the levee system, including any non-project segments (considered by FEMA as non-levee reaches; see Chapter 7 of this document), have been explicitly evaluated in the risk assessment. SQRAs may result in an accreditation recommendation, or, depending on the level of detail and degree of uncertainty, may provide an inconclusive recommendation related to accreditation for the NFIP. QRAs will have sufficient detail to make a levee accreditation recommendation each time. USACE will provide results

and background information regarding QRAs and SQRA to the FEMA Regional office in addition to a recommendation related to accreditation.

It should be noted that both the SQRA and QRA may be based on hydrologic and hydraulic modeling developed by USACE that is different from the modeling used to develop FEMA's regulatory BFEs and flood hazard mapping on the effective FIRM. As part of the SQRA and QRA, USACE evaluates the levee system performance for several flood elevations ranging from the toe to the top of the levee. When reviewing a levee accreditation recommendation provided by USACE, FEMA will compare the effective BFE (and proposed BFE, if available) to the range of flood elevations evaluated by USACE to ensure that the effective BFE (and proposed BFE, if available) falls within this range. If it does not, FEMA will need to determine if the BFE and supporting modeling in this area should be updated based on consultation with USACE. Note that USACE modeling may require additional analyses and refinements to meet FEMA's regulatory requirements, guidance, and standards for flood hazard mapping for the NFIP.

It should also be noted that USACE does not evaluate freeboard as part of a NFIP accreditation recommendation associated with SQRA or QRA. Thus, it is possible that the freeboard provided above the regulatory BFE may be less than the minimum freeboard requirement of 44 CFR 65.10(b)(1), and accreditation of this levee system may still be possible when based on a recommendation by USACE and supported by a SQRA or QRA. However, it is not anticipated that a recommendation for accreditation will be made when a regulatory BFE exceeds the height of the levee system since this fact would preclude FEMA from accrediting the levee system. In any case where the minimum freeboard requirement of 44 CFR 65.10(b)(1) is not met in comparison with the regulatory BFE, the FEMA Regional Office should consult with FEMA Headquarters.

Although USACE may recommend accreditation of a levee system based on a SQRA or QRA in accordance with 44 CFR 65.10(e), additional information may be required to meet the remaining requirements of 44 CFR 65.10. If USACE does not own or maintain the levee system, then the levee sponsor and/or community may be responsible for providing additional information to FEMA. These items may include, but are not limited to, interior drainage analyses, emergency preparedness plans, as-built plans, and operation and maintenance plans. FEMA will review the information provided by USACE and will determine if additional coordination is needed with the community and the levee sponsor to obtain additional information required for NFIP mapping purposes. If a community or other entity seeks accreditation of their levee system, FEMA and USACE will work together to engage the community and levee sponsor to explain what, if any, information provided by USACE meets the requirements of 44 CFR 65.10, and what additional information the community or levee sponsor will need to provide to FEMA to meet the remaining requirements of 44 CFR 65.10.

USACE districts will coordinate with the appropriate FEMA Regions before the start of each SQRA or QRA to determine the appropriate level of engagement with FEMA. As soon as the FEMA Regional Office staff is made aware of a planned or ongoing USACE QRA or SQRA, FEMA Headquarters must be notified and engaged throughout the process to ensure documentation of lessons learned and consistent implementation of best practices. USACE will coordinate with FEMA throughout the risk assessment process, providing visibility on the data and hydrologic and hydraulic modeling being

used for the risk assessment. This engagement allows FEMA to determine if potential changes to the effective base flood elevations are warranted, if and how USACE modeling may be used to update the FIRM when appropriate, and whether interior drainage is addressed in the risk assessment. It is highly recommended that USACE and FEMA jointly coordinate with the levee sponsor and community as soon as the QRA and SQRA results become available. This joint coordination will allow FEMA to communicate impacts to regulatory products and any additional items that may be the responsibility of the levee sponsor and/or community to provide to FEMA in order to meet all requirements of 44 CFR 65.10.

Ultimately, communities or parties seeking accreditation, or recognition of a levee system as reducing the base flood hazard on FIRMs, must provide data and documentation to FEMA in accordance with 44 CFR 65.10. In cases when information collected or developed by USACE through their Levee Safety Program will inform some of the requirements for levee accreditation, the communities or parties seeking accreditation may still have to provide information to fulfill the remaining requirements. It is imperative the FEMA and USACE work together to engage the levee sponsor and community to ensure that they receive one consistent message about what data is available and what is required to most appropriately analyze and map the flood hazards and to understand the flood risk in the levee-impacted area.

4.2.3. CONTINUED ACCREDITATION

Accreditation of a levee system requires the levee owner to demonstrate that the levee system meets, and continues to meet, the requirements of 44 CFR 65.10. Therefore, accreditation is not a one-time activity, and over time, factors may change that require FEMA to reassess accreditation status. These factors can include the expiration of the certification of data by a certifying engineer, endorsement of accreditation by a Federal agency, changes to the hydrologic or hydraulic conditions of the flooding source that necessitates a restudy, and documented deficiencies or lack of maintenance.

4.2.4. EXPIRATION OF DATA CERTIFICATION OR ENDORSEMENT

A certifying engineer or federal agency may choose to place an expiration date on the use of the data and documentation for accreditation of a levee system. This expiration date will be tracked by FEMA in the NLD. Once the certification of this data and documentation or accreditation recommendation by a Federal agency has expired, FEMA will no longer consider the levee system as meeting the requirements of 44 CFR 65.10. FEMA will initiate engagement with the levee owner and impacted community regarding the need to submit certified data and documentation demonstrating the levee system continues to meet the requirements of 44 CFR 65.10 to remain accredited. If this certified data and documentation cannot be provided in a timely manner, FEMA may initiate the analysis and mapping procedures for non-accredited levees (see Chapter 6) to update the flood hazard information impacted by the levee system. At no time shall a levee system with an expired certification of data be remapped as accredited without updated documentation and a certification of data by a registered P.E. or endorsement from an authorized Federal agency.

As referenced in Section 4.2.2.1, refer to USACE's transition guidance regarding expired levee system accreditation recommendations.

4.2.5. UPDATED MODELING ALONG AN ACCREDITED LEVEE

During any update to the FIRM, the flood hazards associated with levee systems should be re-evaluated for all levee systems located along newly studied or restudied flooding sources. If the new or updated study impacts a levee system accredited in accordance with 44 CFR 65.10, the levee owner will be asked to provide data and documentation demonstrating the levee continues to meet the requirements of 44 CFR 65.10 based on the updated hydraulic loadings.

If the hydraulic loading and flood hazard information (BFE, velocities, duration, etc.) from the updated study is less than those used in the previous accreditation documentation for the requirements of 44 CFR 65.10(b), the levee may retain its accreditation status pending submission of the documents meeting the requirements of 44 CFR 65.10(c) and (d), and confirmation from the levee owner that the levee has not been structurally modified since the prior certification of data. In cases where a levee system or levee appurtenance has undergone structural modifications since the previous certification of data, submittal of data and documentation meeting the requirements of 44 CFR 65.10(b) and (e) may also be required.

If the hydraulic loading and flood hazard (BFE, velocities, duration, etc.) from the updated study is greater than those used in the previous accreditation documentation for the design requirements under 44 CFR 65.10(b), the levee owner must submit updated certified data and documentation based on the updated loading and flood hazard information demonstrating the levee system continues to meet the minimum requirements of 44 CFR 65.10. Understanding that the analysis and data collection may require additional time, Regions should take this into consideration when planning project schedules.

This Document Has Been Superseded.
For Reference Only

In some instances, an updated mapping project may include a levee system that was accredited through the LOMR process. The above requirements for updated certification of data and documentation would also apply to levees accredited through the LOMR process, granted the information provided in support of the LOMR reflects the current conditions of the levee system.

If the new or updated study impacts a levee system that has not been accredited in accordance with 44 CFR 65.10, FEMA will proceed with implementing the analysis and mapping procedures for non-accredited levees, as appropriate.

4.2.6. NOTED STRUCTURAL OR MAINTENANCE DEFICIENCIES

FEMA reserves the right to re-evaluate the accreditation status of a levee system if structural or maintenance deficiencies are noted that may cause concern over the validity of the current flood hazard noted on the FIRM. This re-evaluation of the levee status on the FIRMs may be triggered based on inspection reports of State or Federal agencies or performance of the levee system in the context of a base flood event or less. If deficiencies are noted that impact requirements of 44 CFR 65.10, FEMA will coordinate with the levee owner as outlined under Chapter 6 of this document for

resolution and additional data collection, as needed. If resolution is not accepted in a timely manner, FEMA will proceed with action to update the flood hazard on impacted FIRM(s) appropriately.

4.3. Levee Accreditation Reviews

This section outlines the process FEMA will follow when reviewing levee accreditation submittals. This process shall be the same for all types of submittals, including those for new and existing levee systems that have not yet been evaluated and identified during the Discovery phase, PALs, Letters of Map Change (LOMCs), Physical Map Revisions (PMRs), and accredited levee systems impacted by updated hydraulic modeling along the water body. The review process in this section applies to hydraulically independent levee systems defined in Chapter 2 of this document.

FEMA does not require communities or levee owners to accredit their levee systems, however, in accordance with NFIP regulations, communities or other parties seeking recognition of a levee system on NFIP maps may provide data and documentation demonstrating compliance with regulations cited in the 44 CFR 65.10. Once compliance with 44 CFR 65.10 is determined by FEMA, the hydraulically independent levee system will be accredited on NFIP maps, reflecting the appropriate NFIP SFHA and risk premium rate zones for levee-impacted areas. Accreditation by itself is not a guarantee or warranty of performance of levee systems during a flooding event. It is a determination that the levee system meets the minimum design, operation, and maintenance standards set forth in 44 CFR 65.10, to be shown on the NFIP map as providing flood hazard reduction from the past flood event.

**This Document Has Been Superseded.
For Reference Only**

The preferred format for the submittal materials is an electronic PDF with each volume clearly labeled with state, county, community, levee names and document chapter. The backup data in its native electronic format is recommended. However, FEMA may request data in PDF format in cases when data are generated using proprietary software that is not commonly used.

4.3.1. FEMA COMPLIANCE REVIEW

The review of the levee accreditation submittal is a compliance review. It is neither a technical review nor an evaluation of design, it also is not performed to determine how a levee will perform during a flood event. The incoming data supporting 44 CFR 65.10 requirements must be certified by a registered P.E., and licensed by their respective states, or by a federal agency with responsibility for levee design. The compliance review is performed to ensure that all data demonstrating compliance with 44 CFR 65.10 is submitted, so FEMA can delineate the appropriate NFIP SFHA and risk premium rate zones on NFIP maps. However, if FEMA is presented with conflicting data, a more in-depth review can be performed. This additional and more in-depth review would require approval and consultation with FEMA Region and/or HQ, as appropriate. Although FEMA performs a compliance review for 44 CFR 65.10 compliance, submittals must include backup data and supporting information for all calculations demonstrating the certified conclusions for each requirement. Certified summary reports without all backup data are not acceptable.

To make the levee accreditation process efficient, the reviewer may stop the review at any point if basic data requirements are not met. The examples of submittals lacking basic data includes, but not limited to, submittals with no backup data, lack of certification signatures, and submittals with data not organized intelligibly.

If the reviewer decides to stop the review, a data request should be compiled and sent to the requester noting the extent of what has already been reviewed and that additional data requests might be forthcoming once the review is restarted.

FEMA suggests that the data is submitted in the FEMA recommended data organization noted in the document titled [FEMA Suggested Tabbed Submission for 44 CFR 65.10 Accreditation Material](#). This document allows for a cover page for each certification requirement contained in 44 CFR 65.10(b)(1) through (b6). Compliance review of the accreditation materials submitted in a format other than that presented in this document may be significantly delayed or the review may stop moving forward were the basic data appear to be missing due to poor data organization.

44 CFR 65.10 Accreditation Requirements Reviews

This portion of the compliance review is performed to verify whether the submittal has complete data to meet the minimum requirements of 44 CFR 65.10.

Freeboard Compliance Check

The data submitted must contain a profile that shows adequate freeboard exists. The reviewer shall verify the freeboard evaluation profile uses appropriate BFEs from the source consistent with sources recommended in Subsection 4.1.1 compared to the top of levee elevation. The reviewer shall request additional data in cases where the submitted data is not detailed enough to reasonably evaluate the freeboard of the levee under request for accreditation, and the submittal does not provide information about the upstream and downstream tie-ins. The evaluation criteria of upstream and downstream tie-ins shall be consistent with the requirements detailed in Subsection 4.1.2 or Subsection 4.2.1 of this document. The reviewer shall also verify freeboard information shows the levee meets all the requirements of 44 CFR 65.10(b)(1)(i), described in Section 4.1.2 of this document.

In cases where levee does not meet the minimum freeboard requirements, the reviewer shall check whether the submittal provides data supporting the levee meeting the requirements of 44 CFR 65.10(b)(1)(ii). Information on requirements for freeboard exceptions is in Subsection 4.1.2 of this document. In cases where a freeboard exception is requested, the reviewer shall verify that the levee evaluations of the other 44 CFR 65.10 criteria are evaluated using the loading conditions estimated for the freeboard exception requirements.

In case of the levees in coastal areas the reviewer shall check if the data submitted demonstrates the levee meets all the requirements of 44 CFR 65.10(b)(1)(iii), as described in Subsection 4.1.3 of this document. Occasionally, exceptions to the minimum freeboard for the levees in coastal areas are allowed. In these circumstances, the reviewer shall check the data to verify whether the

submitted data meets the requirements of 44 CFR 65.10(b)(1)(iv), described in Subsection 4.1.3 of this document and coordinate with the FEMA Regional Office and FEMA Headquarters.

Closures Compliance Check

The data submitted shall meet all the requirements outlined in Subsection 4.1.4 of this document. Closures include all levee openings noted in Subsection 4.1.4 of this document. The reviewer shall check the data to verify the submittal, includes information on the numbers of closures, closure location, invert elevations, pictures, and type of closure. The reviewer shall verify consistency in the closure data between submitted reports, as-built plans, operation and maintenance plans, and emergency preparedness plans, when applicable.

The reviewer shall also verify that operations and maintenance requirements of the closures are fully met for the completeness of the closure requirements. Also, all closures must be addressed in the submitted inspection reports.

Embankment Protection Compliance Check

The data submitted shall include technical documentation regarding the existing embankment protection. The reviewer shall check the submittal documentation to verify whether the data include an analysis addressing existing protection of the levee embankment and levee foundation from erosion. The analyses shall consider all but not limited to, the factors mentioned in the Subsection 4.1.5 that might impact the erosive forces acting on the levee embankment and foundation. In cases where some of the factors are not accounted for (such as wave action, ice loading, etc.), the reviewer shall seek a written justification for the omission from the certifying engineer. Analysis must at minimum use loadings associated with the effective base flood event.

The reviewer shall check the submittal to verify the type of current embankment protection for the entire levee system, references to accepted documents to demonstrate current protection is adequate against the erosive forces acting on the levee embankment and foundation during the base flood, and backup data supporting the analysis is provided.

USACE has developed reference materials for embankment protection evaluations that may be used as technical reference. Other Federal agencies, such as the U.S. Bureau of Reclamation (USBR), may have technical references that may be leveraged. It is up to the certifying engineer to identify and use the methodology that is most appropriate for the levee being evaluated, other evaluation approaches deemed applicable by the certifying engineer may also be considered if warranted and approved.

Embankment and Foundation Stability Compliance Check

The data submitted shall include technical documentation addressing the embankment and foundation stability of the levee. The reviewer shall check the submitted documentation to verify whether the submitted data includes a seepage and stability analyses demonstrating the levee and foundation stability during the base flood or less frequent events. In cases where flood control

structures are flood walls the reviewer shall also check the analyses demonstrating adequate strength and stability of flood walls are also provided. The analyses shall at the minimum consider the stability conditions mentioned in the Subsection 4.1.6 that might impact the stability of the flood control structures and their foundation.

The reviewer shall check the submittal to verify the submittal identifies the location of evaluated flood control structure section, and that justification is provided for its selection. The reviewer shall also check submittal to verify it includes the backup data supporting the analysis.

The reviewer shall also review the submitted documentation to verify loading conditions used in the analysis are consistent with the base flood used to evaluate other requirements of 44 CFR 65.10.

USACE has developed reference material for levee and foundation stability evaluations that may be used as technical reference. It is up to the certifying engineer to identify and use the methodology that is most appropriate for the levee being evaluated, other methodologies to evaluate levee and foundation stability deemed applicable by the certifying engineer may also be considered if warranted and approved.

Settlement Compliance Check

The data submitted shall include technical documentation that assesses the potential settlement of the levee and reduced freeboard over time. The reviewer shall check the submitted data to verify it includes settlement analysis, information on the current top of levee elevations, and subsidence evaluation, where applicable. The reviewer shall check that the submitted documentation has information to demonstrate that freeboard will be maintained within the minimum standards for the entire levee system after settlement and applicable subsidence are considered. The minimum freeboard applied for evaluation shall correspond to the requirements established in Subsection 4.1.7.

The reviewer shall check the submittal report to verify the analysis considers all, but not limited to, the factors mentioned in Subsection 4.1.7, that might impact the settlement and future freeboard of the levee. In cases where some of the factors are not considered, the reviewer shall request written justification from certifying engineer for omission. The reviewer shall check the submitted data to verify the backup data supporting the analysis is included.

USACE has developed reference material for settlement evaluations that may be used as technical reference. Other Federal agencies, such as USBR, may have technical references that may be leveraged. It is up to the certifying engineer to identify and use the methodology that is most appropriate for the levee being evaluated. Other approaches to evaluate a levee's settlement and estimating future loss of freeboard deemed applicable by the certifying engineer may also be considered if warranted and approved.

Interior Drainage Compliance Check

The reviewer shall verify the submittal includes a hydrologic and hydraulic analysis of the flooding sources on the landside of the levee, identifies the source(s) and extent of flooding due to the flooding sources on the landside, includes a topographic work map showing the extent of any flooded area, and in cases where the average depth of flooding is greater than one-foot, the water-surface elevation of the base flood. New BFEs and/or SFHAs resulting from the interior drainage analysis are subject to the appeal process set forth in 44 CFR Part 67.

The reviewer shall verify the analyses submitted are performed based on the joint probability of interior and exterior flooding, and the capacity and operation of the facilities to evacuate interior floodwaters in the analysis is consistent to the operation and maintenance plans submitted for the levee system.

USACE has developed reference material for joint probability analysis that is commonly used as technical reference for interior drainage analysis. However, analyses performed using other relevant agency or local jurisdiction publications on joint probability are also accepted. The reviewer shall verify the methodology used for interior drainage analysis comply with the methods discussed in Subsection 4.1.8.

The reviewer shall perform a thorough H&H review for all flooding sources identified within the impacted drainage area. The review of the interior drainage analysis shall involve evaluation of the submitted data to check the methodology used to comply with the requirements of 44 CFR 65.10 detailed in Subsection 4.1.8 of this document, as well as meets current FEMA G&S for H&H analyses. The reviewer shall check the data submitted to verify the digital versions of the models used as well as any background calculations or references are included.

Other Design Criteria Compliance Check

In unique situations FEMA may require that additional design criteria and analysis be submitted. The reviewer shall coordinate with FEMA to verify such additional design criteria is applicable for the levee under evaluation. When additional design criteria are applicable, the reviewer shall verify the analysis and design addressing the additional design criteria requested by FEMA and the backup data is provided.

Operation Plans Compliance Check

The reviewer shall verify that the submittal includes an officially adopted operation plan that includes information on interior drainage systems, if any, and all closure structures or devices. The reviewer shall check the submitted package includes official adoption documentations the plan meets all the requirements of 44 CFR 65.10(c) as described in Subsection 4.1.10, and it corresponds with the other sections of the submittal and backup data.

Emergency Preparedness Plan Compliance Check

The levee accreditation submittal shall also include an emergency preparedness plan. The plan must comply with all the emergency preparedness plan requirements discussed in Subsection 4.1.10. Some of the commonly used emergency preparedness plan guideline documents are also provided in this subsection.

The reviewer shall verify the submittal include an officially adopted emergency preparedness plan and it meets the minimum requirements discussed in Subsection 4.1.10. In cases where emergency preparedness plan is a part of the levee's operation plan a separate official adoption document is not necessary.

Maintenance Plans Compliance Check

The reviewer shall verify the submittal includes an officially adopted maintenance plan, verify the plan documents the formal procedure that addresses all the requirements of 44 CFR 65.10(d) as described in Subsection 4.1.10, and the plan corresponds to other sections of the submittal and backup data.

The reviewer shall also verify that both the operation and maintenance plans are prepared for the specific levee for which accreditation is requested. In cases where generic O&M plans, non-specific to the levee system, i.e., plans that cover an entire county or State is used, they are only used as reference and the submitted operation and maintenance plan also include operational and maintenance procedure specific to the levee requested for accreditation.

**This Document Has Been Superseded.
For Reference Only**

Certification Requirements Compliance Check

The reviewer shall verify the data submitted, associated with the requirements of 44 CFR 65.10(b)(1) through (7), are certified by a registered PE, licensed by the appropriate State. If the data are submitted by a Federal agency with responsibility for levee design, the reviewer shall confirm that documentation consistent with Subsection 4.2.2 is provided.

The reviewer shall also check the submitted data to verify a certified copy of as-built plans are submitted and they correspond with other submitted data.

When as-built plans from levee's original construction drawings are used, the as-builts generally are updated adding notes and updates at the locations where the leveraged data does not correctly represent the current condition. It is the certifying engineer's responsibility to ensure the submitted data are still valid. The reviewer shall verify the submittal package in its entirety is certified by a PE.

Once the compliance review is finished and all required components have been submitted and deemed complete, FEMA will accredit the corresponding levee on the affected NFIP map(s). If any component is found to be missing or erroneous and the requester cannot provide missing data to show compliance with 44 CFR 65.10, FEMA will not accredit the levee and reserves the right to suspend or deny the request.

Other Compliance Checks

This portion of the checks are performed to verify the submitted data complies with other regulatory and FEMA standards.

Regulations

The reviewer shall verify the requester has confirmed that the all the applicable permits related to the levee have been obtained. The permits include but, are not limited to the regulations mentioned in Subsection 4.1.11. The verification is generally through communication with the requester. A record of these communications shall be kept in a file. In cases where the requestor provides the information, the data submitted shall be organized and kept in a file.

New Hydrologic and Hydraulic Analyses

If new hydrologic and/or hydraulic analyses are submitted as part of a levee certification package, the submittal must follow the process outlined in Subsection 4.4.1.

Inspection Reports

The reviewer shall verify the documentation, including tests and inspection reports that are required by regulation under 44 CFR 65.10(c)(1)(iii) and 65.10(c)(2)(iv), are provided.

All other applicable inspection reports from either the USA or other US states must be considered as part of the review to ensure that any issues related to 44 CFR 65.10 have been addressed. The reviewer shall verify these documents are provided in the submittal.

**This Document Has Been Superseded.
For Reference Only**

Levee System Cross Reference Check and Certified Reach Documentation

The reviewer shall verify that all components in 44 CFR 65.10 use the same flooding elevations and conditions, and that the entire levee system (if a system consists of different reaches) is considered in the submittal. In cases where the levee system provides flood hazard reduction from multiple flooding sources, the reviewer shall verify the certified analyses use flood elevations from the appropriate flooding source(s).

A certifying engineer may submit certified data and documentation for a levee reach that may not meet all components in 44 CFR 65.10 under the analysis and mapping procedure for non-accredited levee systems (see Chapter 6). In these instances, the submittal may not include data for the entire levee system. In these cases, the submitted package shall clearly identify the reach for which the data is applicable. The package shall also include all the necessary data to demonstrate the section under evaluation meets the definition of a levee reach. The reviewer shall perform the compliance review of the data, document the applicable procedure consistent with the analysis and mapping procedure for non-accredited levees, and clearly identify the levee reach for which the data is submitted. The reviewer shall inform FEMA and the requester that the data does not meet requirements for the full accreditation of the levee system.

4.3.2. DATA STORAGE AND DELIVERY

Once the accreditation package has been considered complete by FEMA or its designee, the applicable correspondence, complete accreditation package, and all applicable models will be provided to the Project Team responsible for updating the FIRM with revised flood hazard information. Data will be captured under the applicable funded project and MIP case number as described in the Guidance Document No. 51, Data Capture – Workflow Details, and the [Data Capture Technical Reference](#).

Complete levee accreditation packages that do not have a funded mapping project or accreditation data submitted through the MT-2 process will be captured and stored as laid out under Section 3.6 of this document.

4.4. Accredited Levee Mapping and Notes

4.4.1. NEW HYDROLOGIC AND HYDRAULIC ANALYSIS

If a new hydrologic and/or hydraulic analysis for the exterior flooding source is submitted as part of a levee accreditation package, the package must be reviewed to determine that it meets FEMA criteria before it can be used to revise the effective BFEs. If the new hydrologic and/or hydraulic analysis indicates the base flood hazards are less conservative than the effective flood hazards, this review must occur and the effective BFEs must be updated before the levee can be accredited. However, if the new hydrologic and/or hydraulic analysis indicates the base flood hazards are more conservative than the effective flood hazards, the levee system may be accredited without revising the BFEs; FEMA will determine if a future revision based on the new analysis is warranted.

4.4.2. “WITH LEVEE” AND NATURAL VALLEY ANALYSES

If a new hydrologic and/or hydraulic analysis is performed in an area with a levee, then both “with levee” and “natural valley” analyses must be performed. For accredited levees, the “with levee” analysis contains all of the 1% annual-chance discharge riverward of the levee. The “natural valley” procedure assumes the levee does not impede floodflows. Because the “natural valley” analysis allows for additional conveyance and/or storage of floodwaters on the landward side of the levee, it typically results in lower BFEs than the “with levee” analysis.

If levees have been built on both sides of the flooding source, the “with levee” analysis assumes that the base flood discharge is contained between the two levees. However, a separate “natural valley” analysis is required for each levee. The “natural valley” analysis for the right levee should assume the left levee is in place and the “natural valley” analysis for the left levee should assume that the right levee is in place. This approach should also be used for analyzing the 0.2% annual-chance flood or lesser events if requested.

Both the “with levee” and “natural valley” analyses should include all of the effective FIS flood frequency profiles and those flood frequency profiles required by current FEMA guidance to be analyzed for the project.

4.4.3. FLOOD PROFILES

For accredited levees, the results of the “with levee” hydraulic analysis will be used to generate the Flood Profiles for the FIS Report. It is not necessary to generate Flood Profiles for the “natural valley” analysis unless specifically requested by the community and approved by FEMA.

4.4.4. BFE AND SFHA MAPPING

For accredited levees, the levee embankment will be shown as within the SFHA on the riverward side of the levee centerline even though it is topographically higher than the BFE. The results of the “with levee” hydraulic analysis are used to map the BFEs riverward of the levee centerline. The area landward of the levee centerline will be mapped as accredited using water-surface elevations from the “natural valley” hydraulic analysis and will be mapped on the best available topography landward of the levee. A zone break will be placed at the centerline of the levee, except in cases where the floodway is designated at the landside toe of the levee. In these instances, the zone break will be placed at the floodway boundary to distinguish the two zones and create the break in the BFE. The flood hazard will be mapped landward of the levee as Zone X (shaded) to show the area with a reduced base flood hazard. The 0.2% annual-chance flood will also be mapped landward of the levee as Zone X (shaded). These two areas of Zone X (shaded) will be differentiated by using the appropriate symbology and notes as described in the FIRM Panel Technical Reference. Any flooding sources and interior drainage flooding that fall within this area will be mapped as an SFHA; the area subject to inundation from the base flood.

**This Document Has Been Superseded.
For Reference Only**

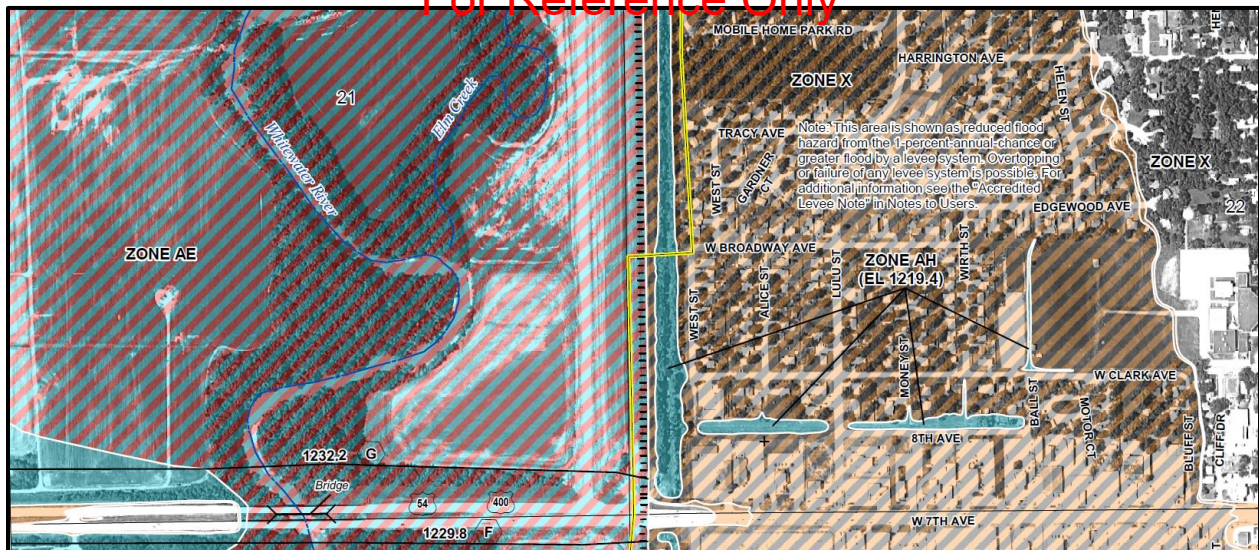


Figure 8: Flood Hazard Mapping of Accredited Levee System

Situations may arise where multiple flooding types may all be present within the levee impacted area. These options could include Zone AE/AH/AO (interior drainage), Zone X (flood hazard reduced by levee), Zone X (less than one-foot average depth), and Zone X (0.2% annual-chance flood event).

When mapping for multiple zone types within the levee impacted area, the following priority should be given from highest to lowest:

Zone AE/AH/AO – Interior drainage SFHA

Zone X - flood hazard reduced by levee

Zone X - less than one-foot average depth

Zone X - 0.2% annual-chance flood event

4.4.5. FLOODWAY ANALYSIS AND MAPPING METHODS

NFIP regulations and Standards SID 69 and 70 state:

Floodway surcharge values must be less than or equal to 1.0 foot. If the state (or other jurisdiction) has established more stringent regulations, these regulations take precedence over the NFIP regulatory standard. Further reduction of maximum allowable surcharge limits can be used if required or requested and approved by the communities impacted... [and] If a stream forms the boundary between two or more states and/or tribes, either the 1.0-foot maximum allowable rise criterion or existing floodway agreements between the parties shall be used.

**This Document Has Been Superseded.
For Reference Only**

Coordination with communities may be necessary in establishing the floodway extents implementing the floodway analysis methodology described below. The community coordination process shall be in accordance to Section 2 of FEMA Guidance Document No. 79, Floodway Analysis and Mapping, accessible through the FEMA Flood Risk Analysis and Mapping webpage.

Accredited levee systems are assumed to be hydraulically significant levees, and floodways for areas impacted by accredited levee systems should be computed using the same procedures outlined in Chapter 6 of this document for hydraulically significant levees. Please refer to Section 6.19 of this document for a description of these methods.

4.4.6. MULTIPLE LEVEE SCENARIOS

When multiple levee systems may reduce flood hazards for the same area, each system must be individually analyzed, and the higher BFEs from the “natural valley” analyses shall be used on the FIRM for the levee-impacted area. If an area is impacted by both an accredited levee and non-accredited levee systems, the area shall be mapped in accordance with the appropriate procedure for both the accredited and non-accredited levee systems. Refer to the Chapter 6 of this document for information about mapping non-accredited levees.

In some cases, where one or more levee systems are located within the levee-impacted area of a larger levee system (exterior levee system), such as interior drainage levees (interior levee system). In these cases, it may be possible that both levee systems are accredited (see Figure 9) and the natural valley floodplain for the interior levee will fall within the natural valley floodplain for the

exterior levee. For mapping purposes, gutterlines should be used to separate the Zone X (shaded) areas impacted by the interior levees from the Zone X (shaded) area impacted by only the exterior levee system.



**This Document Has Been Superseded.
For Reference Only**
Figure 9: Multiple-Levee Scenario

In many cases, the interior levee system is designed to provide flood hazard reductions from an interior flooding source that may have an identified SFHA with a lower flood hazard than the exterior levee system. Three basic scenarios are possible:

1. If the exterior levee system is accredited (levee-impacted area 1 in Figure 9), the accreditation of any interior levee systems (levee-impacted area 2 in Figure 9) shall be based on the characteristics of the interior flooding sources to be shown with a reduced flood hazard.
2. If the exterior levee system is non-accredited (levee-impacted area 1 in Figure 9), the accreditation of any interior levee system (levee-impacted area 2 in Figure 9) shall be based on the characteristics of both the interior flooding sources and the exterior flooding sources to be shown with a reduced flood hazard.
3. If the interior levee system does not meet the accreditation requirements in either case, it shall be mapped using the procedures for non-accredited levee systems.

When no SFHA has been identified from any flooding source or interior drainage system associated with an interior levee, then an analysis of flood hazards shall be performed per Section 6.10 of this document to determine if a flood hazard exists.

4.4.7. ACCREDITED LEVEE NOTES TO USERS

When an accredited levee is shown on a FIRM panel, the Notes to Users section of the panel should include an accredited levee note as described in the [FIRM Panel Technical Reference](#). This note should also be included in the Notes to Users section of the FIS Report.

4.4.8. ACCREDITED LEVEES IN THE FIS REPORT

All accredited levees should be referenced in the FIS Report as explained in the [FIS Report Technical Reference](#). This consists of including all levees in Table 9 of the FIS Report and referencing them on the Floodway Data Table as appropriate.

5. Provisionally Accredited Levee Systems

5.1. Provisional Levee Accreditation Overview

Levee owners and other levee stakeholders are responsible for providing 44 CFR 65.10-compliant design, operation, and maintenance documentation for FEMA to issue FIRMs recognizing the base flood hazard reduction capability of levee systems, also referred to as accreditation. In 2005, FEMA issued guidelines to clarify roles and responsibilities for levee flood hazard identification during a Flood Risk Project. FEMA further recognized that levee-impacted communities or other levee stakeholders may not have all documentation readily available to meet the requirements of 44 CFR 65.10, which could delay a Flood Risk Project. In 2007, FEMA issued guidelines establishing the PAL designation. The PAL designation provides communities and levee owners a specified timeframe to gather and submit 44 CFR 65.10-compliant data and documentation while allowing FEMA to move forward with preliminary and effective FIRMs while minimizing impact to the map production schedule.

This Document Has Been Superseded
For Reference Only

A levee system is not eligible for a PAL designation if it is not shown as providing flood hazard reduction on the effective FIRM or on an attachment to a LOMR. A PAL designation can only be offered once for any given levee system.

This chapter provides guidance on determining if a levee system is eligible for a PAL designation and, if so, the process to offer the PAL, associated communication, and mapping. The determination of PAL eligibility requires coordination with Federal, State, and local levee stakeholders to support the decision-making process. Table 2 highlights the eligibility requirements that a levee system must meet to be considered for a PAL designation and provides the appropriate PAL category for the offer to the levee owner. If the levee system cannot meet any of the eligibility requirements listed in Table 2, then the levee system is not eligible for a PAL designation.

Table 2: Summary of Minimum PAL Requirements

Non-USACE or USACE Program Levee System	PAL Category	Levee System Shown as Providing Base Flood Hazard Reduction on Effective FIRM	PAL Not Previously Offered for Levee System
Non-USACE Program Levee System	A	X	X
USACE Program Levee System	B	X	X

5.2. PAL Eligibility Requirements

When levee systems are identified during a Flood Risk Project, a PAL designation may be considered in certain circumstances. Upon completing the levee system identification process, as specified in Section 3.3 of this document, within the project area, a Project Team member will perform an assessment of PAL eligibility. For a PAL eligibility determination, the levee systems identified should first be separated into three categories:

1. Levee systems not identified on the effective FIRM
2. Levee systems identified on the effective FIRM, but not shown as providing base flood hazard reduction
3. Levee systems identified on the effective FIRM and are shown as providing base flood hazard reduction

This Document Has Been Superseded
For Reference Only

Only levee systems identified on the effective FIRM and shown as providing base flood hazard reduction can be considered for a PAL designation. If the levee system is shown as providing base flood hazard reduction on the effective FIRM, the Project Team must determine whether a PAL designation has been previously offered for the levee system. FEMA will only offer a PAL designation once to any given levee system. If a PAL designation was previously offered for the levee system, then the levee system is not PAL eligible.

To determine if a levee system is “PAL eligible”, FEMA must first establish, through coordination with USACE, whether the levee system is a USACE Program levee system or a non-USACE Program levee system.

For this document, USACE Program levee systems typically have recent inspection and risk assessment data, and are described in the following categories:

- Levee systems built by USACE that were authorized for construction by the U.S. Congress or by USACE continuing authorities (e.g., Section 205). These levee systems may contain levee projects constructed by non-Federal entities or other Federal agencies and incorporated into the USACE Program levee system by specific congressional action. In either case, these levee systems may be:

- Owned or partially owned by USACE
 - Operated and maintained by USACE
 - Operated and maintained by a local sponsor (also referred to as levee sponsor, public sponsor, or non-federal sponsor)
 - A combination of the above
- Non-Federal projects that are Active in the USACE Rehabilitation Program (pursuant to PL 84-99).

For non-federal projects that are Inactive in the USACE Rehabilitation Program, but were previously Active, USACE may still have data available to share with FEMA. As USACE continues to collect and expand information for all levees in the Nation in the NLD, it is best practice to look for information in the NLD and coordinate with USACE.

For this document, levee systems that do not meet the above criteria for a USACE Program levee system will be considered a non-USACE Program levee system, and this includes non-federal projects made Inactive in the USACE Rehabilitation Program.

Additionally, levee system symbology on the effective FIRM is important when determining PAL eligibility. If levee system symbology is not shown on the effective FIRM, the Project Team will consider the presence of a levee and the purpose of the structure. If levee symbology is not identified on an effective FIRM, but the structure implies base flood hazard reduction and has been verified to meet the definition of a levee system, a PAL designation may be considered.

**This Document Has Been Superseded
For Reference Only**

Consideration of offering a PAL designation for a USACE Program levee system or a non-USACE Program levee system can follow different procedures and require different documentation, and as a result, have different PAL categories. The PAL categories are A: non-USACE Program levee system and B: USACE Program levee system. Table 2 shows that both categories of levee systems must meet the same general PAL eligibility requirements. Figure 10 (on page 61 of this document) provides a workflow process for assessment of PAL eligibility.

5.3. Considerations for Offering PAL to PAL Eligible Levee Systems

Even when a levee system is eligible for PAL Category A or B, FEMA may find that offering a PAL designation is not the best course of action. Therefore, additional considerations should be assessed before a PAL designation is offered.

If a levee system is determined to be PAL eligible per Section 5.2, the next step is for the Project Team to consider if:

- The levee system crest is at least 2 feet above the effective BFE.

- Operation and maintenance requirements of 44 CFR 65.10(c) and 44 CFR 65.10(d) have been met.

O&M plans under the jurisdiction of a federal or state agency, an agency created by federal or state law, or agency of a community participating in the NFIP is a regulatory requirement of 44 CFR 65.10(c) and 44 CFR 65.10(d). It is also information all communities are required to provide as part of a qualifying levee system for a PAL designation. FEMA will evaluate, before offering a PAL designation, whether an O&M plan under one of the jurisdictions cited above is available for the levee system. If the levee system does not have an O&M plan per 44 CFR 65.10(c) and 44 CFR 65.10(d), FEMA may not offer a PAL designation for the levee system.

Considerations and coordination with levee system stakeholders vary somewhat between non-USACE Program levee systems and USACE Program levee systems when deciding to offer a PAL designation and are described in detail in Subsections 5.3.1 and 5.3.2 and illustrated in the decision tree in Figure 10 on page 61 of this document.

5.3.1. PAL CATEGORY A – CONSIDERATIONS FOR OFFERING PAL FOR NON-USACE PROGRAM LEVEE SYSTEMS

The Project Team will assess the following considerations for offering a PAL designation when a levee system is determined to be eligible for PAL Category A:

- Where the levee system crest elevation and BFE are available, the Project Team should compare them to determine if the levee system crest elevation is at least 2 feet above the effective BFE. At no point along the levee system should the crest elevation be less than 2 feet above the effective BFE.
- Does information exist that indicates the levee system does not meet the design criteria of 65.10(b)?
- The levee owner must demonstrate that the levee system meets the operation and maintenance requirements of 44 CFR 65.10(c) and 44 CFR 65.10(d). The levee owner must be able to provide records of levee system maintenance and operation, as well as tests of mechanized interior drainage systems, if applicable.

Even for a non-USACE Program levee system, FEMA should first coordinate with USACE to determine if they have any data related to the levee system. The assessment to offer a PAL designation for non-USACE Program levee systems should then be performed in coordination with the local levee owner or the entity responsible for the levee system operation and maintenance.

It may be more difficult to obtain levee system crest elevation data for non-USACE Program levee systems. FEMA will need to work with the levee owner(s) to determine best available levee system crest elevation information and BFE information. FEMA will estimate the BFE(s). New or more up to date modeling may result in BFEs that are different than what is provided in the effective study. New or more recent BFEs may be used only if increases are demonstrated above the effective BFEs

information. Water-surface elevation decreases in new or updated locations may not be used in place of the effective information.

FEMA recognizes that non-USACE Program levee systems may not have levee inspections and/or levee risk assessments like a USACE Program levee system may have. At a minimum, the levee owner must be able to provide records of levee system operation and maintenance, as well as tests of mechanized interior drainage systems, if applicable. If no operation and maintenance records exist, FEMA will not offer a PAL designation for the levee system.

5.3.2. PAL CATEGORY B – CONSIDERATIONS FOR OFFERING PAL TO USACE PROGRAM LEVEE SYSTEMS

This subsection provides considerations that the Project Team should be assess before FEMA will offer a PAL designation to USACE Program levee systems determined to be eligible for PAL Category B. In addition, this subsection identifies the suggested coordination with USACE when assessing whether a PAL should be offered. FEMA and USACE will initially coordinate PAL assessment and then should jointly engage the local levee system sponsor and impacted communities after it has been agreed that the levee system is PAL eligible. Coordination with USACE will include requesting data and documentation concerning USACE Program levee systems to facilitate the assessment for offering a PAL designation.

The Project Team should assess the following considerations for offering a PAL designation when a levee system is determined to be eligible for PAL Category B:

**This Document Has Been Superseded.
For Reference Only**

- No readily available information indicates that the levee system does not have base flood risk reduction capability.
- Where the levee system crest elevation and BFE are available, the Project Team should compare them to determine if the levee system crest elevation is at least 2 feet above BFE. At no point along the levee system, can the crest elevation be less than 2 feet above BFE.
- Does information exist that indicates the levee system does not meet the design criteria of 44 CFR 65.10(b)?
- The levee owner must demonstrate that the levee system meets the operation and maintenance requirements of 44 CFR 65.10(c) and 44 CFR 65.10(d).
- For USACE Program levee systems, levee inspections and risk assessments provide valuable information to help determine if the above-mentioned criteria may be met for the levee system.

In some cases, new or more up to date modeling may result in BFEs that are different than what is provided in the effective study. New or more recent BFEs may be used only if increases are demonstrated above the effective BFEs information. Water-surface elevation decreases in new or updated locations may not be used in place of the effective information.

For non-Federal levee systems that have been placed on Inactive status in the USACE Rehabilitation Program, the FEMA Regional Office will obtain a copy of the USACE notification letter to the levee owner informing the owner that the levee system status has been changed from Active to Inactive. They will also coordinate with the appropriate USACE District office to determine whether the levee owner should be offered a PAL designation for the levee system.

**This Document Has Been Superseded.
For Reference Only**

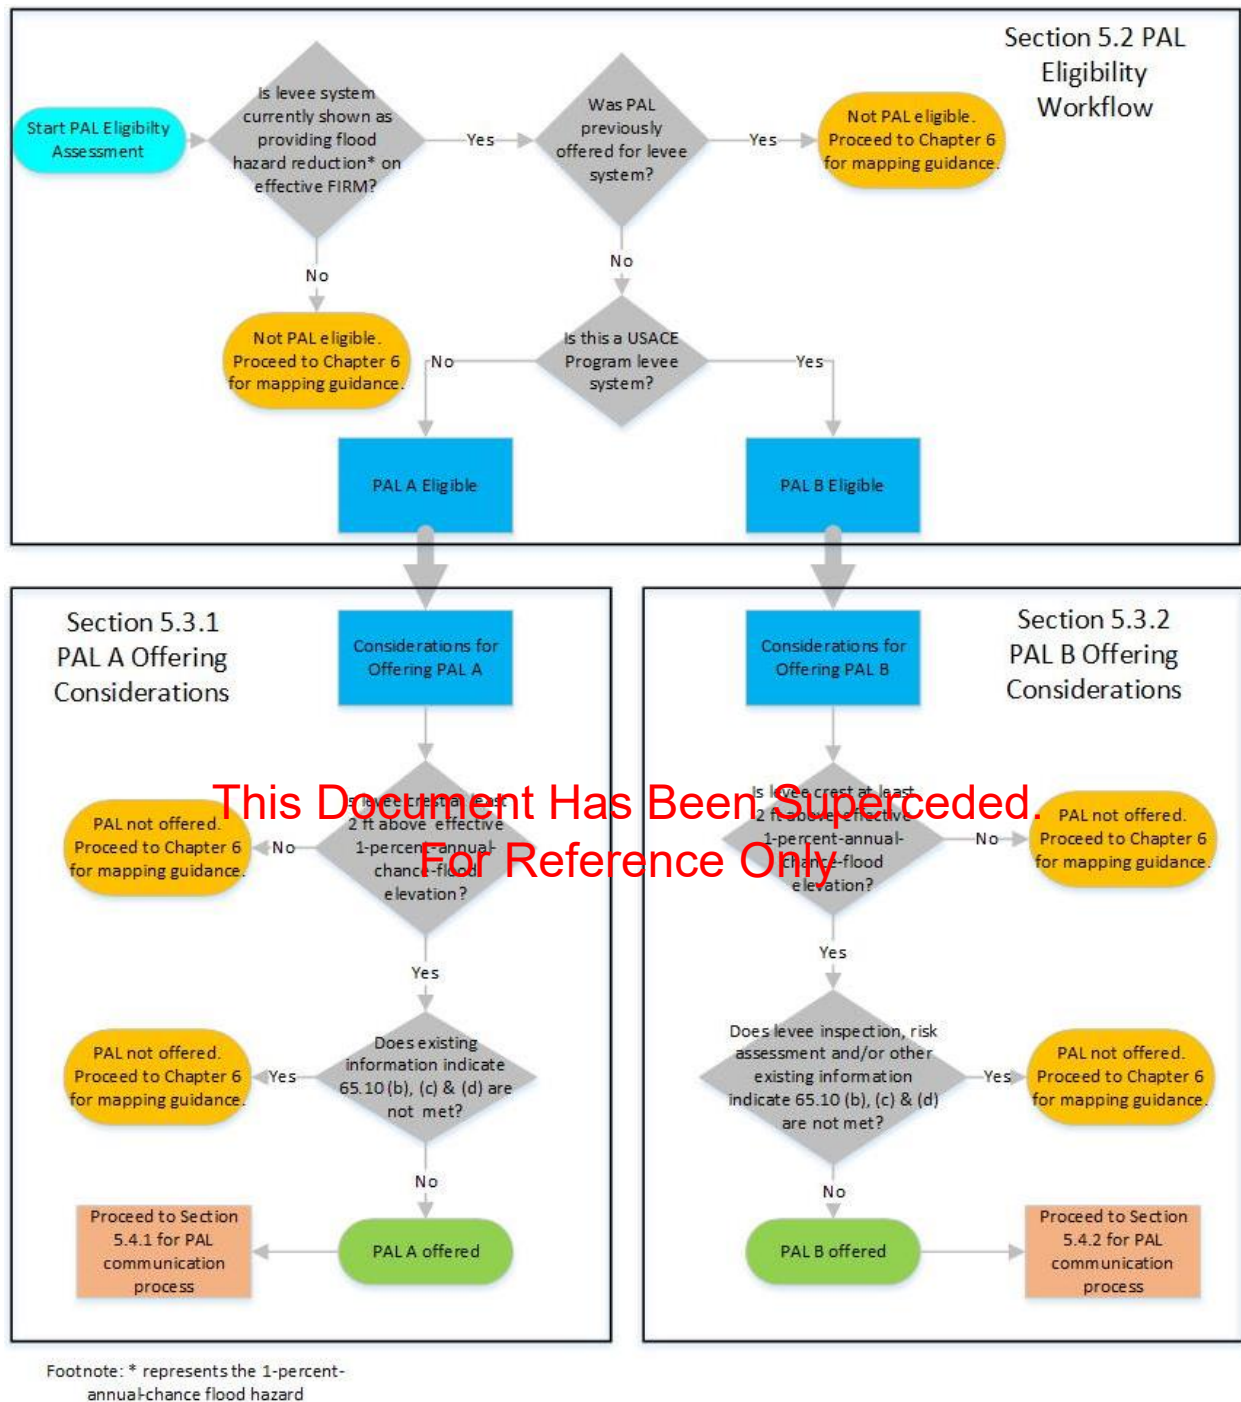


Figure 10: PAL Determination Decisions Tree

5.4. PAL Communication and Coordination Processes

This section discusses the communication and coordination processes followed by FEMA, Project Team members, levee owners, and USACE once a levee system has been identified as being eligible

for a PAL designation per the criteria outlined in Sections 5.2 and 5.3 of this document. This section also discusses the required PAL submission and 44 CFR 65.10-required data and documentation submission from the levee owner to FEMA. Levee systems not eligible for a PAL designation should be evaluated through analysis and mapping procedures for non-accredited levee systems and associated engagement. See Chapter 6 of this document for more information regarding non-accredited levee systems.

5.4.1. PAL CATEGORY A

The Project Team will prepare an initial notification letter for the FEMA Regional Office to send to the appropriate levee owner(s) to identify the levee system(s) that meet the criteria in Subsection 5.3.1 of this document and are, therefore, PAL eligible. The FEMA letter will describe the PAL category and the requirements and supporting documentation to enter a PAL agreement with FEMA.

The following attachments will accompany the initial notification letter sent to the levee owner(s) of non-USACE Program levee systems:

- A description of the requirements to meet 44 CFR 65.10
- An agreement to accept the PAL designation (agreement for Category A), for the levee owner(s) to sign and return to FEMA before the 91st day following the date of the initial notification letter. FEMA will send a similar agreement to levee-impacted community(ies).

**This Document Has Been Superseded.
For Reference Only**

Once the FEMA Regional Office sends the initial notification letter for Category A, the levee owner will have 90 days to return the PAL submission. The PAL submission requirements are as follows:

- An agreement signed by the levee owner(s) stating that the mapping of the PAL on a FIRM (PAL designation) is warranted because the levee system can be demonstrated to meet the requirements of 44 CFR 65.10, and that data demonstrating such will be provided to FEMA within 24 months. A similar, signed agreement must be provided by any levee impacted community(ies).
- A copy of the adopted operation and maintenance plan for the levee system.
- Records of levee system maintenance and operation, as well as tests of the mechanized interior drainage systems, if applicable.

Any levee owner that signs a PAL agreement must submit 44 CFR 65.10-compliant data and documentation within 24 months of the 91st day following the date of the initial notification letter. Levee owners may provide 44 CFR 65.10-compliant data to FEMA at any point within this 24-month timeframe and are encouraged to do so as soon as possible. In addition, the levee owner(s) must submit a progress report to FEMA 12 months after signing the PAL agreement to document progress toward obtaining 44 CFR 65.10-compliant data and documentation.

5.4.2. PAL CATEGORY B

The Project Team will prepare an initial notification letter for the FEMA Regional Office to send to the appropriate levee owner(s) to identify the levee system(s) that meet the criteria in Subsection 5.3.2 of this document and are, therefore, PAL eligible. A copy of this letter will be sent to the appropriate USACE District office for awareness. The FEMA letter will describe the PAL category and the requirements and supporting documentation to enter a PAL agreement with FEMA.

The following attachments will accompany the initial notification letter sent to the levee owner(s) of USACE Program levee systems:

- A description of the requirements to meet 44 CFR 65.10, Mapping of Areas Protected by Levee Systems.
- An agreement to accept the PAL (agreement for Category B), for the levee owner(s) to sign and send back to FEMA before the 91st day following the date of the initial notification letter. FEMA will send a similar agreement to levee impacted community(ies).

When the levee system is fully or partially owned by USACE, FEMA will coordinate with the USACE District office and other levee owner(s), if any, to determine if the levee owner(s) intend to sign a PAL agreement.

Once the FEMA Regional Office sends the initial notification letter for Category B, the levee owner will have 90 days to return the PAL submission. The PAL submission requirements are as follows:

- An agreement signed by the levee owner(s) stating that the PAL designation is warranted because the levee system can be demonstrated to meet the requirements of 44 CFR 65.10, and that data demonstrating such will be provided to FEMA within 24 months. A similar, signed agreement must be provided by any levee impacted community.

Any levee owner that signs a PAL agreement must submit 44 CFR 65.10-compliant data and documentation within 24 months of the 91st day following the date of the initial notification letter. Levee owners may provide 44 CFR 65.10-compliant data to FEMA at any point within this 24-month timeframe and are encouraged to do so as soon as possible. In addition, the levee owner(s) must submit a progress report to FEMA 12 months after signing the PAL agreement to document progress toward obtaining 44 CFR 65.10-compliant data and documentation.

5.4.3. TIMING OF INITIAL NOTIFICATION LETTER

To minimize the risk of the PAL designation expiring prior to the effective date of the FIRM panel impacted by the PAL note, ideally the initial notification letter from FEMA should be timed such that the signed PAL agreements from levee owners and impacted communities are received before FEMA issues the Preliminary FIRM as indicated in Figure 11.

For example, an initial notification letter could be provided after KDP 2. This would allow the 90-day PAL offer period (beginning the date of the initial notification letter and ending 90 days later) to

expire before the conclusion of the Quality Review 3 (QR3) review and the result of the PAL offer could be reflected on the Preliminary FIRM. Coordination with the QR3 reviewer may be necessary to allow the PAL note to be shown on the FIRM before the expiration of the PAL offer period and the QR3 review should not be deemed complete before to the 91st day past the date of the initial notification letter. This timing for the QR3 review to overlap the PAL offer period reduces, but does not eliminate, the risk of the 24-month PAL period expiring before the effective date of the FIRM.

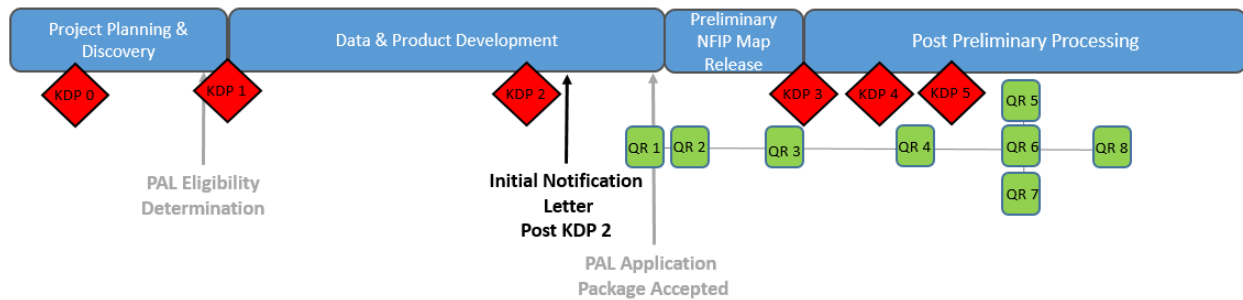


Figure 11: Initial Notification Letter within Risk MAP Project Timeline

5.4.4. COMMUNICATION GUIDANCE FOR PAL SUBMISSION ACCEPTED BY FEMA

This subsection provides guidance for communication to levee owners when FEMA accepts a PAL submission.

This Document Has Been Superseded.
For Reference Only

During the 24-month period that the PAL agreement is active (24-month PAL period), the FEMA Project Officer or designee will notify the levee owners and other stakeholders of the ongoing 24-month PAL period during which the levee owner must submit 44 CFR 65.10-compliant data and documentation to FEMA. This notification will be accomplished by sending a series of letters during the 24-month PAL period as follows:

- 30 days after initiation of the PAL agreement
- 10 months after initiation of the PAL agreement
- 16 months after initiation of the PAL agreement
- 90 days before the PAL period expiration date
- 30 days before the PAL period expiration date

Additionally, a progress report reminder letter will be sent to the levee owner to remind the owner that a progress report is due to FEMA 12 months after the start of the 24-month PAL period to document progress toward compliance with the PAL agreement.

The FEMA Project Officer or designee will send the letters to each levee owner signatory of the PAL Agreement, and will send copies of the letters to the following (at a minimum):

- CEOs of all impacted communities
- FPAs of all impacted communities
- State NFIP Coordinator(s)
- State levee safety officials, where appropriate
- District offices of U.S. Senators and U.S. Representatives
- USACE District offices if the levee system is a USACE Program levee system

It is important that appropriate District offices of U.S. Senators and U.S. Representatives are aware of this communication effort throughout the 24-month PAL period, especially in advance of the PAL period expiration date. Therefore, in addition to sending copies of the letters, FEMA Regional Offices shall notify their Regional Legislative Affairs Division who may coordinate additional outreach efforts, as appropriate.

The FEMA Project Officer may choose standard U.S. mail or certified mail to send the letters to the levee owners and impacted communities. Use of a tracking number and mail service website (such as USPS.com) is recommended for delivery tracking to confirm delivery of the letter. The FEMA Project Officer or designated Project Team member will file return receipts, fax reports, or phone logs documenting the follow-up telephone calls in the case file for each affected community. The FEMA Project Officer or designated Project Team member will also include copies of the letters with other technical and administrative support data in the Technical Support Data Notebook (TSDN) for the project upon the expiration of the PAL period.

This Document Has Been Superseded.
For Reference Only

Additionally, the FEMA Project Officer should consider conducting an in-person PAL outreach meeting with the levee owner and other stakeholders to discuss:

- Status of the levee system
- Data collection process in support of submitting 44 CFR 65.10-compliant data and documentation to FEMA for contents only review and approval prior to the expiration date of the PAL period
- Analysis and mapping procedures for non-accredited levee systems, if applicable

The recommended timing of this meeting is near the time that the levee owner is to provide the 12-month progress report to FEMA.

The FEMA Project Officer or designated Project Team member will distribute and track the letters to each levee owner signatory of the PAL agreement and other federal, state, and local stakeholders.

5.4.5. COMMUNICATION GUIDANCE FOR PAL SUBMISSION NOT ACCEPTED BY FEMA

Conditions may arise where FEMA has determined a levee system to be PAL eligible and offered a PAL designation, but then decides not to proceed with PAL designation for the levee system. If any of the following conditions occur, FEMA may decide not to accept the PAL submission:

- The signed PAL agreement is not returned to FEMA before the 91st day following the date of the initial notification letter.
- The PAL submission is determined to be deficient, such as:
 - A copy of the adopted operation and maintenance plan for the levee system is deficient or not provided.
 - For non-USACE Program levee systems, records of levee system maintenance and operation, as well as tests of the mechanized interior drainage systems, if applicable, are deficient or not provided.

5.4.6. RESCINDING THE PAL DESIGNATION

If any of the following conditions arise during the 24-month PAL period, FEMA may take immediate action to rescind the PAL designation and revise the FIRM for the area landward of the levee system:

- FEMA determines that the data and documentation required for compliance with 44 CFR 65.10 is deficient within 24 months of the 91st day following the date of the initial notification letter.
- The 12-month progress report is not provided to FEMA, and the FEMA Regional Office believes the PAL agreement should be rescinded.

If the FEMA Project Officer, based on the above criteria, concludes that a PAL designation should be rescinded before the expiration of the 24-month PAL period, the FEMA Project Officer will send a notification letter to the levee owner. The FEMA letter will clearly state the reason for rescinding the PAL designation and identify the levee system as non-accredited. See Chapter 6 of this document for more information regarding non-accredited levee systems.

5.4.7. DATA AND DOCUMENTATION SUBMISSION FOR PAL LEEVE SYSTEMS IN SUPPORT OF 44 CFR 65.10

If a levee owner can provide 44 CFR 65.10-compliant data and documentation for a levee system to FEMA before the expiration date of the PAL, the levee system will be accredited and mapped accordingly, either within a current mapping project, or through a LOMR or PMR. The timing of the submission will impact FEMA's decision on the appropriate mapping process. Completeness regarding 44 CFR 65.10 requirements is discussed in Chapter 4.3.

FEMA will not grant extensions to the 24-month PAL period. However, accreditation opportunities for levee system are still available after the expiration date of the PAL agreement and before the Letter

of Final Determination (LFD) for the update map showing the levee system not having base flood hazard reduction capability, if applicable.

If a levee owner can provide 44 CFR 65.10-compliant data and documentation and the submission is deemed complete by FEMA after the expiration date of the PAL agreement but before the effective date of the updated FIRM, FEMA will revise the FIRM and process it following the accreditation guidance provided in Chapter 4 of this document. This process does not provide an extension to the PAL period and may cause FEMA to spend funds to revise the FIRM to reflect the hazard of the non-accredited levee system, only to receive the submission and change direction to accreditation during the in-progress mapping project. However, this process provides consistency nationwide in initiating map revisions in a timely manner following the expiration of a PAL period.

If a levee owner provides the FEMA Regional Office with the 44 CFR 65.10 data and documentation submission and the data is deemed non-compliant by FEMA, the levee owner may submit additional data and documentation to substantiate compliance with 44 CFR 65.10. However, this data must be deemed compliant prior to the LFD date for the updated FIRM. If additional data and documentation submitted up to the day before the LFD date still do not meet the requirements of 44 CFR 65.10, FEMA may delay the FIRM. If issues with the data and documentation cannot be resolved, the flood hazard associated with the levee system should be addressed through analysis and mapping procedures for non-accredited levee systems. See Chapter 6 of this document for more information regarding analysis and mapping procedures for non-accredited levee systems.

After the date of the LFD for the updated FIRM, a levee owner may provide 44 CFR 65.10-compliant data and documentation submission to FEMA for a compliance review through the LOMR or PMR process.

**This Document Has Been Superseded.
For Reference Only**

5.5. PAL Mapping and Notes

5.5.1. MAPPING PROJECT WITH PAL DESIGNATIONS

Cartographic Specifications for PALs

For levee systems with PAL designations, the levee-impacted area can still be mapped as Zone X (shaded) area with reduced flood hazard due to levee. The PAL designation associated with the Zone X (shaded) area with reduced flood hazard due to levee will be indicated on the FIRM panel with a PAL note. See [FIRM Panel Technical Reference](#) for more information regarding the depiction of flood hazard features and notes.

Notes to Users

For levee systems with PAL designations, the Notes to Users section of the FIRM directs map users to additional information about provisionally accredited levee systems. This note shall be on all FIRM panels that contain PALs. See [FIRM Panel Technical Reference](#) for more information regarding the FIRM Levee Notes to Users for PALs.

The Notes to Users example in [FIRM Panel Technical Reference](#) includes blanks in the note for the Project Team member to populate with the end date of the PAL period for the levee system associated with the flood zone.

See Subsection 5.4.1.6 and [FIRM Database Technical Reference](#) for more information regarding the S_Levee Table.

FIRM Panel Index

The Project Team does not need to revise the FIRM Panel Index due to a PAL designation. The Project Team does not need to revise and update the FIS Report to identify and include the levee systems that have a PAL designation. The Levees table in the FIS Report should show all accredited, provisionally accredited, and non-accredited levee systems. See [FIS Report Technical Reference](#) for more information regarding the Levees table of the FIS Report.

FIRM Database

The FEMA FIRM Database stores the digital GIS data used in the map production process, as well as tabular information inside the FIS Report.

The S_Levee table, part of the FIRM Database, contains information about levee systems shown on the FIRMs, including levee systems with PAL designations. For levee systems with PAL designations, the S_Levee table contains a field to be populated with the end date of the PAL period for the levee systems associated with the flood zone. The end date of the PAL period for the levee system is 24 months from the start date of the PAL period. If the date is not known, the assigned Project Team member can obtain this date through consultation with FEMA Project Officer or other Regional Office staff. For more information regarding the S_Levee table, see [FIRM Database Technical Reference](#).

This Document Has Been Superseded.
For Reference Only

Flood Risk Products

The L_Levee_Scenario table describes scenarios modeled for levee systems in the Flood Risk Database. The table contains a field to be populated by the Project Team member with levee system accreditation status, which includes the option of PALs. See [Flood Risk Database Technical Reference](#) for more information regarding the L_Levee_Scenario table. For a list of acceptable values for levee accreditation status, see the D_Levee_Accreditation domain in [Domain Tables Technical Reference](#).

5.5.2. MAPPING PROJECT WITH EXPIRED PAL DESIGNATION

For mapping projects that contain levee systems with expired PAL designations, the Project Team should address the flood hazard associated with the levee system following the analysis and mapping procedures for non-accredited levee systems summarized in Chapter 6 of this document; however, depicting levee systems with expired PAL notes on Preliminary or effective FIRMs may be appropriate in limited situations. It is a standard that the justification to use an expired PAL agreement date on the FIRM panel must be approved by the FEMA Region and FEMA Headquarters.

If approval is obtained from FEMA Region and FEMA Headquarters to include an expired PAL note on an effective FIRM, the Project Team should follow the guidance in Subsection 5.5.1 of this document.

6. Non-Accredited Levee Systems

This chapter provides guidance to FEMA Regional Office staff, FEMA Risk MAP providers, CTPs, and CTP providers involved in performing Flood Risk Projects where non-accredited levee systems have been identified. The FEMA, provider, and CTP staff involved in these “non-accredited levee projects” are hereinafter referred to as “Project Teams”. An overview of the process described in this chapter is shown in Figure 12 on page 72.

6.1. Non-Accredited Levee Systems Defined

Non-accredited levee systems are systems that do not meet the NFIP regulatory requirements of 44 CFR 65.10 as described in Chapter 4 of this document and that are not shown on a FIRM as reducing the base flood hazard. This process for non-accredited levee systems will not be applied to non-levee features (discussed in Chapter 7 of this document), levee systems that are not hydraulically significant, or coastal structures² that reduce the flood hazard to areas below sea level. For mapping purposes, a structure is considered hydraulically insignificant if, during a base flood event, the peak water-surface elevations landward of the structure may be the same regardless of whether the structure was in place.

**This Document Has Been Superseded.
For Reference Only**

The technical procedures described in this document may be used for non-accredited levee systems that are not hydraulically significant, but the process as a whole does not apply.

6.2. Other Considerations

Subsections 6.2.1 through 6.2.5 provide information regarding the submission of data through the LOMR process, coastal considerations, expiring PAL system designations, projects involving multiple levee systems, and projects involving levee systems that are in the process of being restored.

6.2.1. SUBMISSION OF DATA THROUGH THE LETTER OF MAP REVISION PROCESS

Mapping of non-accredited levee systems may be completed following the MT-2 process for LOMRs provided that the requester follows the guidance for analysis and mapping procedures for non-accredited levee systems as outlined in this document. Before submitting the LOMR request, the community FPA or designee establish a Local Levee Partnership Team (LLPT) with participation of stakeholders, including FEMA, based on the complexity and scope of the levee system under

² For coastal structures, such as seawalls, revetments, and bulkheads, the USACE Coastal Engineering Research Center (CERC) prepared Technical Report CERC-89-15, Criteria for Evaluating Coastal Flood Protection Structures, in December 1989.

evaluation. The organizer of the LLPT must document the options discussed by the LLPT members and FEMA decisions regarding the appropriate analysis and mapping procedures to be used. So that all stakeholders are included in the map revision process, the organizer or designee will make copies of these documents available directly or through a publicly accessible website. Upon completion of a Levee Analysis and Mapping Plan, discussed in Section 6.7 of this document, the requester can submit a request for a LOMR.

6.2.2. COASTAL CONSIDERATIONS

Flood Risk Projects involving non-accredited levee systems in coastal areas may have a longer timeline for completion than a “typical” levee-related Flood Risk Project in a riverine or lacustrine setting.

The Project Team also may need to assess and discuss the transition zones between coastal and riverine levees. Additional information regarding coastal considerations is provided in the discussion of each of the technical procedures in Subsections 6.11 through 6.15 of this document.

6.2.3. EXPIRING PROVISIONALLY ACCREDITED LEEVE DESIGNATIONS

Because extensive coordination may have been performed as part of the PAL process (see Chapter 5), the Project Team may not need to carry out some outreach and data collection for levee systems where PAL designations are expiring. Where outreach and data collection activities are necessary, the Project Team is to perform these tasks in conjunction with the remaining parts of the PAL process. For example, the Stakeholder Coordination and Data Collection Meeting (discussed in Section 6.4) may be combined with the PAL Meeting (discussed in Subsection 5.4.4) to discuss whether the PAL status or designation is expiring, along with potential options to address the levee. The FEMA Project Officer will make this determination through coordination with other Project Team members at the appropriate time to incorporate the FEMA levee analysis and mapping procedures for non-accredited levees into the project timeline.

6.2.4. PROJECTS INVOLVING MULTIPLE LEEVE SYSTEMS

If levee systems have been constructed on both sides of a flooding source, or if multiple levee systems overlap, the Project Team will analyze the extents of the natural valley area and reach-specific flood hazards for each system independently, assuming the other system remains in place.

6.2.5. LEEVE RESTORATION AND ADEQUATE PROGRESS

Situations may occur where FEMA determines, through coordination with community officials, levee owners, and/or OFAs), that a restoration (Zone AR, 44 CFR 65.14) or adequate progress (Zone A99, 44 CFR 61.12) project for the levee is underway. In these instances, levee reaches are not used. Rather, the regulatory requirements provided in 44 CFR 61.12 for new construction projects that have made adequate progress toward completion, or the regulatory requirements provided in 44 CFR 65.14 for de-accredited levee systems that are being restored to provide base flood event design, or greater, would apply. Section 100230 of the Biggert-Waters Flood Insurance Reform Act of

2012 (Public Law 112-141) provides additional guidance on reconstruction or improvement of flood hazard reduction systems. Additional guidance is provided in Guidance Document No. 34, Guidance for Flood Risk Analysis and Mapping: Zone A99 and Zone AR Determinations, which is accessible from the FEMA Guidelines and Standards for Flood Risk Analysis and Mapping webpage

6.3. Levee Analysis and Mapping Procedure

Under the FEMA levee analysis and mapping approach followed before FEMA issued guidance in July 2013, FEMA analyzed and mapped a levee system that did not meet the NFIP requirements of 44 CFR 65.10 as if it had no effect on flooding on the landward side of the levee system during the base flood. This was known as the “without levee” approach.

The FEMA document titled Analysis and Mapping Procedures for Non-Accredited Levee Systems, issued in July 2013, provides additional information on the process used by FEMA to analyze and map areas on the landward side of non-accredited levee systems that are shown on FIRMs. The document, which is accessible from the FEMA website (<https://www.hsdl.org/?view&did=762216>), provides:

- A synopsis of FEMA’s historic analysis in the vicinity of levee systems
- An overview of the development process and teams responsible for procedure development
- Response to the public comments received and incorporated
- An understanding of analyses and mapping approaches

**This Document Has Been Superseded.
For Reference Only**

The technical aspects of Analysis and Mapping Procedures for Non-Accredited Levee Systems have been incorporated into this document.

Given recent technological advances in data collection and H&H modeling, FEMA can implement a more refined approach to mapping flood hazards in areas landward of levee systems. The current levee analysis and mapping procedures were developed to analyze and map areas on the landward side of non-accredited levee systems that are shown on FIRMs. The current levee analysis and mapping procedures better meet the needs of the public and provide results that are more refined.

The current FEMA levee analysis and mapping procedures for non-accredited levee systems provide for a repeatable and flexible approach that:

- Complies with all existing statutory and regulatory requirements governing the NFIP, most notably the requirements of 44 CFR 65.10
- Leverages local input, knowledge, and data through proactive stakeholder engagement
- Aligns available resources for engineering analysis and mapping commensurate with the level of hazard in the areas landward of levee systems

- Recognizes the uncertainty associated with levee systems
- Allows analysis of levee reaches
- Considers, from an engineering perspective, the unique characteristics of each levee system

Figure 12 illustrates the current FEMA levee analysis and mapping procedures for non-accredited levee systems. Guidance on the identification of the levees is detailed in Section 3.3 of this document. Following confirmation that a structure is a levee; the Project Team conducts an initial accreditation evaluation to determine if the levee system is accredited or can be provisionally accredited. If neither, then the Project Team analyzes the levee system following the levee analysis and mapping procedures illustrated in Figure 12.

**This Document Has Been Superseded.
For Reference Only**

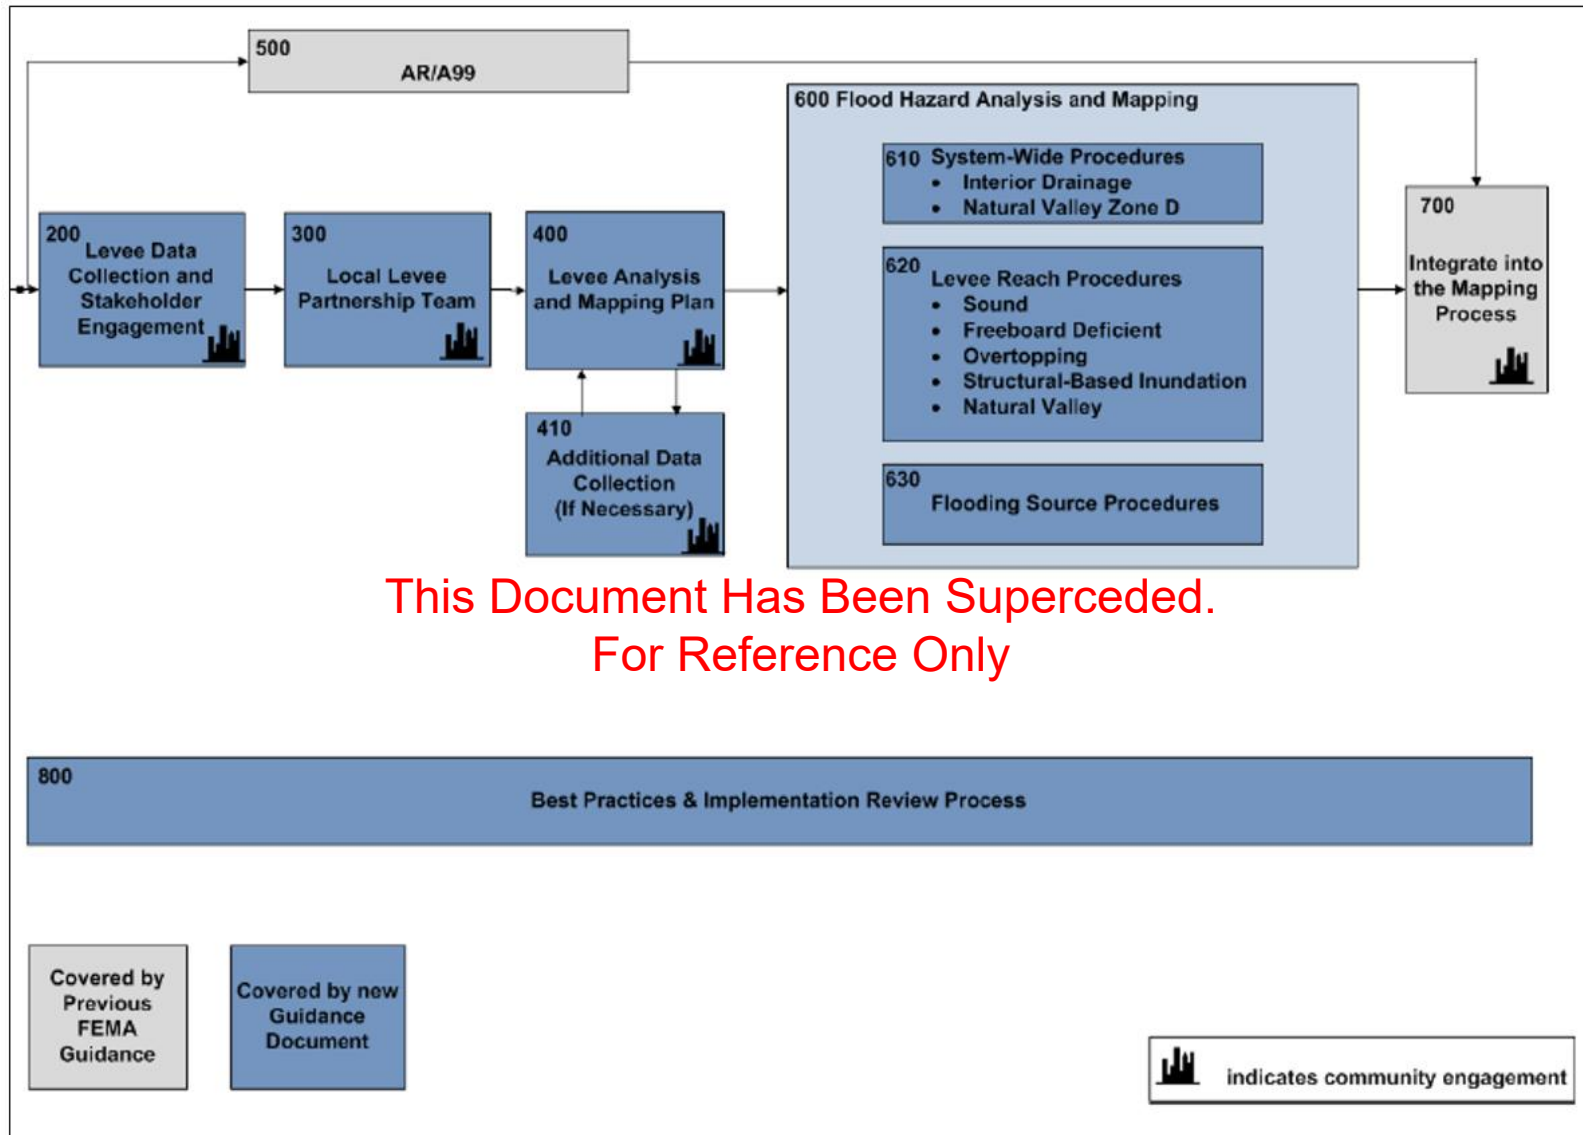


Figure 12: FEMA Levee Analysis and Mapping Procedure

6.4. Levee Data Collection and Stakeholder Engagement (Figure 12, Element 200)

The FEMA analysis and mapping procedures for non-accredited levees include an interactive coordination process with key stakeholders, including State and community officials, officials of participating Tribes, and levee owner(s). The primary goals of the levee data collection and stakeholder engagement phase are:

1. Improve stakeholder understanding of the levee analysis and mapping process.
2. Help the Project Team obtain a comprehensive understanding of data available and the levee system(s) in project areas so that informed decisions may be made by FEMA regarding the procedures to be used to model and map flood hazards for non-accredited levee systems.

FEMA has developed email and letter templates that the Project Team may use when inviting community stakeholders to meet with the LLPT. Project Team members may obtain copies of Region-specific templates through the FEMA Project Officer.

FEMA Regional Office staff are to plan, and budget for, stakeholder coordination, data collection, and establishment of an LLPT for all Flood Risk Projects involving non-accredited levee systems. Each step is discussed in this document. If little or no data are available, or if the Natural Valley Procedure discussed in Subsection 6.10.1 of this document is preferred by the affected communities and that preference is documented, the scope may be limited. The stakeholder coordination step should typically occur during the Discovery process for the watershed/project area that is the focus of the Flood Risk Project.

This Document Has Been Superseded.
For Reference Only

The Project Team will perform the initial levee stakeholder coordination and data collection steps for all non-accredited levee systems. In some instances, the results of these data collection efforts may indicate that the data and documentation already collected are adequate and are sufficient to make a decision on potential analysis and mapping procedures. Where applicable, such a decision will be made by the FEMA Project Officer with input from the LLPT. The primary function of the LLPT will be to provide feedback, additional data, and options on levee reach selection for the system. Additional information on the LLPT is provided in Section 6.5 of this document. Thereafter, FEMA, through coordination with community officials, Tribal officials, levee owner(s), and local project sponsor(s), will proceed with modeling the levee system and mapping the flood hazards in areas landward of the levee system. (See Figure 12, Elements 500 and 600.)

The levee data collection and stakeholder engagement process are shown in Figure 13 and discussed in more detail in Subsections 6.4.1 through 6.4.4.

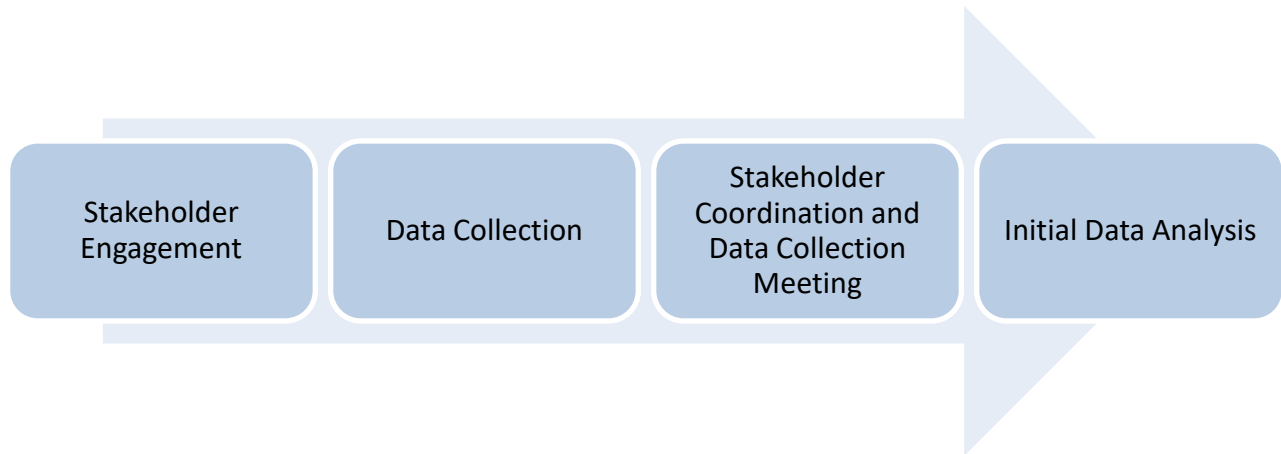


Figure 13: Levee Data Collection and Stakeholder Engagement Process

6.4.1. STAKEHOLDER ENGAGEMENT

The FEMA Project Officer or designee will engage levee-impacted communities, levee owners/operators, and levee sponsors during the stakeholder engagement process. The purpose of this initial engagement is twofold:

1. Discuss the levee analysis and mapping process.
2. Collect initial community- and levee system-related information and data to help streamline and facilitate future meetings. This upfront coordination may take the form of conference calls, Web-enabled meetings, or other means that facilitates two-way communication.

For a Flood Risk Project involving a non-accredited levee system, the Project Team will need to engage with a different array of community, county, regional, and State officials and other stakeholders than may be engaged for a Flood Risk Project that does not involve such systems. The stakeholders to be engaged include, but are not limited to, the following:

- Community, County, and State emergency management officials
- Levee owners/operators
- Officials from communities upstream of, downstream of, and across the flooding source from the levee system
- State or regional groups with a vested interest in water resources, such as levee boards, conservation districts, and watershed/river basin commissions
- Dam safety officials
- Members of Tribal communities, as defined through consultation and coordination with Tribal officials

- GIS managers and specialists, community and regional planners, and county land use departments
- Representatives of district offices of OFAs with responsibility for levee systems in the project area, including USACE District offices
- Economic development and commerce representatives
- Members of the local engineering community

This upfront coordination may take the form of conference calls, Web-based meetings, or other means of two-way communication. The types of levee stakeholders engaged in a levee-related project may vary by State or Region but may include local community and Tribal officials and agencies, local economic development organizations or environmental groups, members of the local engineering community, State, and regional representatives, USACE, and OFAs.

6.4.2. DATA COLLECTION

The Project Team will obtain available supporting data and documentation for the levee system elements from levee system owners; levee system operators; State agencies; local agencies; private individuals or corporations; FEMA data repository and online services; and USACE, including the NLD; and OFAs. The Project Team may perform some of this data collection before an initial meeting with levee stakeholders. This data collection effort before the meeting will help FEMA facilitate and encourage substantive discussion during the meeting. In addition, the Project Team will obtain available supporting documentation regarding historical performance of the levee system, considering both successful performance and unsuccessful performance issues.

Collecting data and information early in the process will help the Project Team facilitate and encourage substantive discussion during meetings with stakeholders. Data collection efforts may vary based on the uniqueness of the levee system. FEMA will not fund any efforts related to certifying data for levee accreditation or making determinations of the levee's structural conditions. Levee owners may choose to perform additional data collection activities but must do so at their own expense. The Project Team will work with various stakeholders as appropriate to obtain supporting data and documentation. The Project Team will make the data and documentation available to those who request it.

Depending on the complexity of the levee system, data and documentation collected may include (if available and applicable), but are not limited to, the following:

- Design reports/memorandums
- Construction documentation reports/memorandums, specifications, or plans
- Post-construction plans and specifications (e.g., bridges, roads, utility construction that occurred since levee construction)

- Survey data
- Geotechnical reports
- Structural analyses
- Interior drainage analyses
- O&M plans
- Inspection reports
- Historical news articles or data regarding levee breaches and flood fighting efforts and levee distress
- USACE NLD data, Levee Screening, or Risk Assessment Reports
- Flood records and streamflow data
- Current orthophotography and topographic data
- Related data from the FEMA MIP, the FEMA Engineering Library, and other FEMA archives/databases
- Building footprint/parcel data
- Master drainage plans and/or flood modeling
- PAL or accreditation review documentation

**This Document Has Been Superseded.
For Reference Only**

Project Team members are to use the NLD as a first resource, if available. The data and information collected will help FEMA and the levee stakeholders develop an approach for modeling and mapping the flood hazard in areas landward of non-accredited levee systems.

Typically, the FEMA Project Officer will make the initial contact with district offices of OFAs to obtain data and information regarding levees. The Project Officer will determine the appropriateness of followup contacts with OFAs by other Project Team members. Data and information collection efforts may also vary based on the potential uniqueness of each area landward of a levee system. The FEMA Project Officer and other Project Team members will work with various stakeholders in these areas to obtain the best available supporting data, information, and documentation. Levee owners may choose to perform additional data and information collection activities but must do so at their own expense.

The Project Team is to develop and maintain a distribution list for disseminating information to all stakeholders involved in the process and maintain this list throughout the lifecycle of the project

If, during the data collection effort, information and documentation is provided substantiating that the levee system may be accredited, FEMA will reconsider the accreditation determination following the guidance discussed in Chapter 4 of this document.

6.4.3. STAKEHOLDER COORDINATION AND DATA COLLECTION MEETING

An in-person meeting with stakeholders, referred to as the Stakeholder Coordination and Data Collection Meeting, is vital during the data collection phase of a levee mapping project. Information on the objectives, timing, attendees, messages to be delivered, pre- and post-meeting activities, and field reconnaissance efforts related to the meeting is provided in the following subsections.

Meeting Objectives

The overarching objectives of the Stakeholder Coordination and Data Collection Meeting are:

- To introduce stakeholders to each other
- To discuss areas of flood risk, available data, and the FEMA process for analyzing and mapping flood hazards landward of non-accredited levees

To accomplish these objectives, the Project Team performed the upfront research and data and information collection activities described in Subsection 6.4.2. This first meeting is a working meeting, so it is important that attendees are prepared to contribute and that the meeting facilitator and other Project Team members encourage participation.

**This Document Has Been Superseded.
For Reference Only**

A comprehensive list of the meeting objectives is included below. It may not be possible to cover these objectives at every stakeholder meeting. However, this list includes the array of topics that may be discussed depending on the levee system.

- Introduce the Project Team to the community officials, Tribal officials, and other stakeholders with areas of influence within the areas potentially impacted by a new levee analysis and mapping project.
- Emphasize that the goal of the levee analysis and mapping project is to apply the technical procedure that best reflects the flood hazard in the area landward of the levee based on available resources, data, and community needs.
- Review available data on the levee system, confirm whether the data are accurate, and obtain stakeholders' perspectives about their flood hazards. This will help determine the appropriate procedure for modeling the levee system.
- Emphasize the importance of the stakeholders' responsibility in providing necessary data and keeping the public informed of flood hazards and the relevance of those hazards.
- Discuss floodplain management implications of the use of Zone D as the flood hazard designation on the FIRM.

- Discuss potential members of an LLPT, which is discussed in more detail in Section 6.6 of this document.

Meeting Timing

The Project Team is to hold the Stakeholder Coordination and Data Collection Meeting after Project Team members have collected available data, documentation, and information and have had initial discussions with identified stakeholders. The Project Team will plan the Stakeholder Coordination and Data Collection Meeting in coordination with the affected community officials, Tribal officials, and levee owner(s)/operator(s).

Meeting Attendees

The Project Team is to invite all stakeholders contacted during the levee data collection and stakeholder engagement process to the Stakeholder Coordination and Data Collection Meeting. It may not be possible for all stakeholders to attend all meetings. However, their input is important, and Project Team members should attempt to coordinate with these stakeholders in advance of the meeting if their attendance is not feasible or to arrange for remote participation when necessary. Additionally, Project Team members are to ask stakeholders for suggestions of other stakeholders who should be included in the Stakeholder Coordination and Data Collection Meeting and any subsequent meetings. Project Team members are to follow up on meeting outcomes and actions with those stakeholders who are not able to attend in person or remotely.

**This Document Has Been Superseded.
For Reference Only**

Meeting Messages

Messages that are to be emphasized during the Stakeholder Coordination and Data Collection Meeting include, but are not limited to, the following:

- The levee analysis and mapping approach is a process with a variety of options, where the stakeholders are actively engaged in the process.
- The goal of the levee analysis and mapping project is to apply the procedure that best reflects the flood hazard in the area landward of the levee system based on available resources, data, and community needs.
- It is important for community officials to keep the public informed of flood hazards and associated risks and the relevance of those risks and identifying the public as a stakeholder in the process.
- The use of Zone D landward of the levee system has floodplain management implications.
- Some risk of flooding will always exist landward of a levee system.
- Additional information is available from the Living with webpage on the FEMA website, available at <https://www.fema.gov/flood-maps/living-levees>

Pre-Meeting Activities

Meeting-related actions and materials that the Project Team is to compile before the Stakeholder Coordination and Data Collection Meeting include, but are not limited to, the following:

- Coordinate with stakeholders upfront to obtain data; understand the levee system being assessed and its history; and to learn about a community's or Tribe's resources, assets, future plans, vision, etc.
- Confirm best available data (including the timing of such data) and discuss data-sharing agreements.
- Prepare talking points to discuss the levee system, the levee analysis and mapping approach, and the project lifecycle.
- Prepare NFIP compliance/adoption information as appropriate.
- Arrange for a field reconnaissance visit during the Stakeholder Coordination and Data Collection Meeting if appropriate.
- Prepare and distribute a meeting invitation, meeting agenda appropriate for the levee system, and map for discussion purposes.

The FEMA Project Officer, the FEMA Regional Tribal Liaison, or other FEMA Regional Office staff will identify any additional items that may be needed when Tribal Nations are affected through consultation and coordination with Tribal officials.

This Document Has Been Superseded
For Reference Only

Meeting Activities

Stakeholder Coordination and Data Collection Meeting activities include, but are not limited to, the following:

- An interactive, collaborative discussion. Project Team members are to facilitate discussions between community officials and other stakeholders, offer suggestions, and manage the time.
- Review of available data. Project Team members are to make a map providing a system-wide view of available data gathered to date available in GIS format. The GIS format allows a Project Team member to zoom in and out to specific, targeted areas for discussion purposes during the meeting.
- Identification of gaps in data collected. Project Team members are to work with meeting participants to identify data gaps that need to be filled and formulate a reasonable plan or alternatives, to fill the gaps especially if filling the gap is critical to project completion.
- Discussion of the procedures for analyzing and mapping the levee system(s) that are the focus of the project. Project Team members are to present the information in a logical way that illustrates

the levee system(s) and the currently available and potentially available data. This will allow the majority of the meeting time to be focused on gaining a better understanding of the next steps for all participants.

Field Reconnaissance

In some instances, the Project Team may participate in a field reconnaissance of the levee system after the Stakeholder Coordination and Data Collection Meeting. The FEMA Project Officer will decide the type and level of field reconnaissance based on project needs and available resources.

Field reconnaissance generally is recommended along reaches where the Overtopping Procedure (discussed in Subsection 6.10.3 of this document) or the Structural-Based Inundation Procedure (discussed in Subsection 6.10.2 of this document) could potentially be used to model and map a levee reach. The field reconnaissance effort may be a drive along the levee system or a walk on top of the levee system to view areas of interest. The Project Team is to document the field reconnaissance using notes, markups, sketches, and/or photographs.

The field reconnaissance is not an inspection or an attempt by the Project Team to make technical conclusions on the quality, substance, or performance of the levee system. The primary purpose of the field reconnaissance is for the Project Team to gain a better understanding of the levee system to reflect the flood hazard information on the FIRM in areas landward of the levee system. FEMA analyses for flood hazard mapping do not predict or guarantee the performance, reliability, or overall safety of a levee system and are used only to identify the flood hazards landward of the levee system.

**This Document Has Been Superseded.
For Reference Only**

6.4.4. INITIAL LEEVEE DATA ANALYSIS

The Project Team will analyze the collected data, information, and documentation to prepare for the LLPT Meeting(s). By performing this data analysis, the Project Team will be better prepared for specific discussions with the LLPT members about levee system history, characteristics, modeling procedures available, flood hazards, flood hazard communications, and outreach. The FEMA Project Officer will determine the appropriate level of effort for this activity; the level of effort should be commensurate with the level of risk to the community, the complexity of the levee system, and the available data. Two main efforts may occur during this step.

1. The Project Team will analyze currently available and potentially available data to determine what reach-specific procedures could potentially be applied to the levee system(s) being analyzed. For example, if data to meet the structural requirements is not available and not expected to be available, the LLPT Meeting discussion should be focused on both the Natural Valley and Structural-Based Procedures.
2. The Project Team will conduct an analysis to determine baseline estimates and expected ranges of the SFHA extent and depth. This will usually include a Natural Valley analysis, evaluation of levee crest elevations, or the use of previously developed preliminary flood hazard zone boundaries. A rough analysis using the Structural-Based Inundation Procedure may be included

as well. The Project Team will perform the analysis using readily available data, such as topographic data from the USGS National Elevation Dataset (available at <https://nationalmap.gov/elevation.html>) or more detailed data from the community.


As part of this initial Natural Valley analysis, the Project Team will develop 1% annual- chance flood elevations by one of the following methods:

- Use the effective analysis.
- Prepare a Base Level analysis that applies the effective or a proposed flood discharge with a Base Level hydraulic model.
- Extend the effective BFEs landward of the levee.

In most situations, extending BFEs landward of the levee system represents a worst-case scenario for defining the limits of the SFHA. The Project Team will develop water-surface elevations for discussion purposes only, and the Project Team is to clearly inform the LLPT members that the final BFEs and SFHA delineations that will be shown on the FIRM may not match the results of this initial data analysis.

To show the results of this analysis, the Project Team will select depth profile locations to communicate the variability resulting from the various procedures as shown in Figure 14. For example, in Figure 14, the initial data analysis indicates that no single approach results in the shallowest depths landward of the levee. At the upstream end, the red area is the area where a Natural Valley analysis results in the deepest depths. In the central part of the levee (yellow area), however, the Natural Valley analysis results in the lowest depths, and the Structural-Based Inundation analysis results in the deepest depths. This initial analysis will provide the LLPT with an early indication of what the results from various types of analyses might provide.

The Project Team is to present the results through maps and a draft version of the Levee Analysis and Mapping Plan that summarizes the methods used and results. The Project Team will use the draft maps and draft plan to facilitate discussions with the LLPT regarding the available data and the range of potential outcomes. The FEMA Project Officer will provide templates for the draft maps and plan.

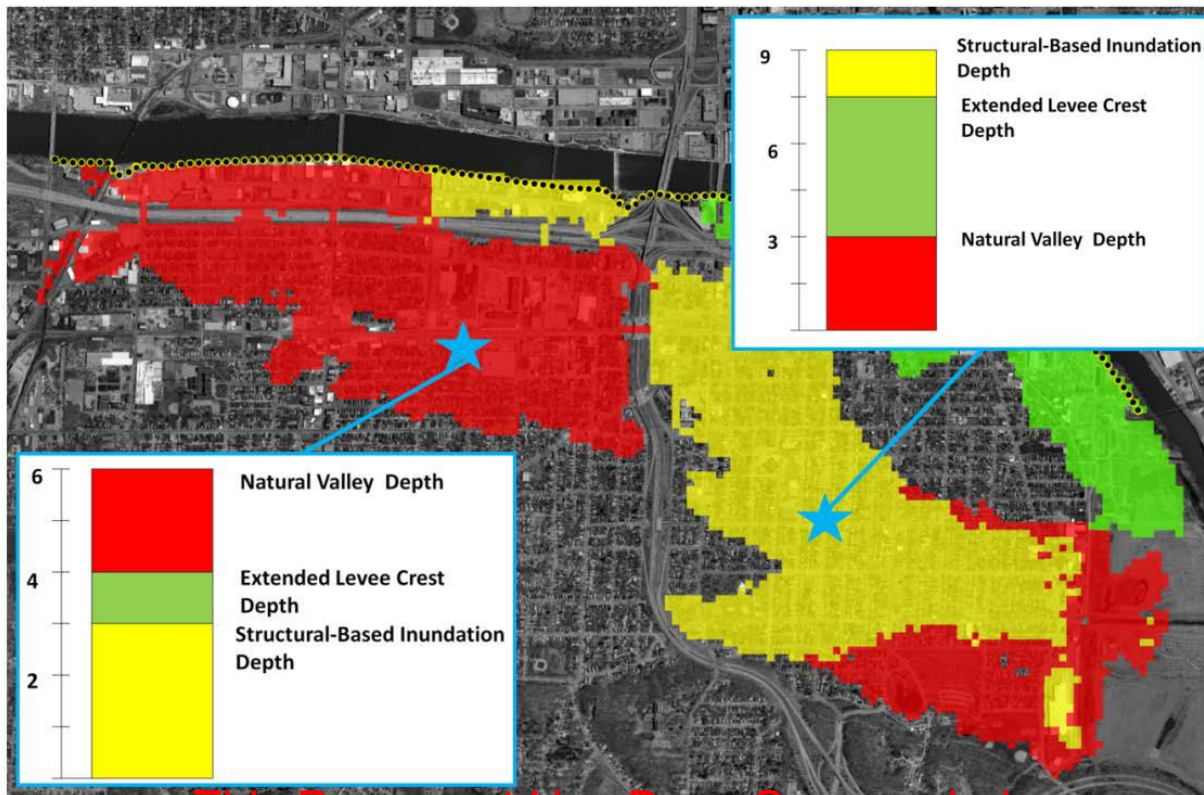

**This Document Has Been Superseded.
For Reference Only**

Figure 14: Sample of Potential Inundation Extents

6.5. Local Levee Partnership Team (Figure 12, Element 300)

6.5.1. INTRODUCTION AND MISSION

The levee analysis and mapping procedures provided for an interactive coordination effort with stakeholders, especially the key stakeholders that are invited to participate in the LLPT. A LLPT must be established with participation of diverse stakeholders based on the complexity and scope of the levee system under evaluation. The options discussed by the LLPT members and the decisions by FEMA regarding the appropriate analysis and mapping procedures to be used, must be documented, and made available to stakeholders. Participants in the LLPT will vary, depending on the scope and complexity of the levee system that is being analyzed and mapped.

The primary function of the LLPT will be to provide feedback and, if necessary, additional data, information, or documentation. The role of the FEMA Project Officer or other Regional Office representative as the facilitator of the LLPT will be to present results of the initial levee data analysis and any subsequent analysis, solicit and consider input from other LLPT members, and make the final decision on the technical procedure(s) to be applied to effectively analyze and map the flood hazards in the area landward of the levee system.

In consultation with the other LLPT members, the FEMA Project Officer or other Regional Office representative will determine the number and format for the LLPT meetings and coordination activities.

6.5.2. TRANSPARENCY

The LLPT membership and activities must be transparent. To maintain this transparency, an assigned LLPT member or other designee is to create an attendance sheet documenting invitees and members attending meetings (in person, by telephone, or via the Web). In addition, the LLPT is to prepare meeting minutes that document important discussions, action items, and decisions made by FEMA. The LLPT is to make these documents available to stakeholders by U.S. mail, email, or postings to a publicly accessible website.

6.5.3. MEMBERSHIP

During the Stakeholder Coordination and Data Collection Meeting, the FEMA Project Officer or other Regional Office representative will explain the need for the LLPT and the types of individuals who could be members. The Project Officer or other representative from the FEMA Regional Office will always be a member of the LLPT but may not always attend meetings in person.

Once established, FEMA will provide outreach and training materials to enhance the ability of the LLPT members to meet their objectives successfully. For most projects, LLPT members will be a subset of those stakeholders that participated in the Stakeholder Coordination and Data Collection Meeting.

**This Document Has Been Superseded
For Reference Only**

At minimum, all communities and tribes affected by flooding related to how the levee is analyzed and mapped will have the opportunity to have a participating member on the LLPT. If a community or tribe does not own or operate the levee in question, levee owners/operators will also have an opportunity to participate.

The following are the types of groups and individuals that could be invited to participate in the LLPT:

- Community CEO or designee (individual with decision-making authority, if not the CEO)
- CEO or designee of participating tribe (individual with decision-making authority)
- Community FPA
- Tribe FPA
- State NFIP Coordinator
- Levee owner and/or local project sponsor (if levee is not owned by a community)
- Local engineer/technical representative invited by the community

- FEMA Regional Office representative
- Representatives of OFA district offices that could provide additional input
- Other Project Team members (i.e., CTPs, FEMA Risk MAP providers, CTP subcontractors)
- Others as determined jointly by the community and FEMA Regional Office representative

6.5.4. ROLES AND RESPONSIBILITIES

The FEMA Regional Office representative will coordinate with the LLPT, obtain LLPT member input, and make final decisions on the way to analyze and map the flood hazards in the areas landward of the levee system. The FEMA Regional Office representative will decide how reaches of the levee system are analyzed and mapped.

The Project Team will perform the levee analyses and mapping activities as directed by the FEMA Regional Office representative. This may include preparing the initial data analysis, as well as developing intermediate flood risk products. As previously stated, the non-FEMA LLPT members' primary role is to provide data and input to FEMA, including commenting on the creation of levee reaches and the procedures to be used for analyzing and mapping the reaches based on local levee conditions.

In some circumstances, State agencies other than the State agency represented by the State NFIP Coordinator may be active participants in the LLPT. Their roles will vary based on the specific agency's mission and relationship to the impacted communities and levee owners.

In many situations, a USACE District office will have a history of providing support to impacted communities and levee owners. The FEMA Regional Office representative should coordinate with USACE District office staff before establishing the LLPT to discuss what role the USACE District Office staff will assume on the LLPT. Likewise, the FEMA Regional Office representative will coordinate with OFAs other than USACE in determining their role when it is appropriate for them to participate.

6.6. Local Levee Partnership Team Meetings (Figure 12, Element 300)

6.6.1. MEETING OBJECTIVES

In addition to the general Risk MAP objectives, the LLPT has the following specific objectives:

- Provide all members the opportunity to explain the unique conditions that will influence the analysis and mapping associated with the non-accredited levee system.
- Allow for discussion on the information and data obtained and the results of any analyses presented.

- Allow for comment on methods for levee reaches, analyses, and mapping within the allowable guidelines.
- Develop, if necessary, a reasonable schedule for obtaining input or additional data.

6.6.2. MEETING TIMING AND FORMAT

Depending on the complexity of the levee system under consideration, the FEMA Regional Office representative and LLPT members will determine the number and format for the LLPT Meetings and other coordination activities.

The initial LLPT Meeting will take place after the stakeholder coordination, data collection, and initial data analysis have taken place. As discussed in Section 6.4 of this document, the FEMA Project Officer and other Project Team members will use the initial data analysis to help explain alternatives to the LLPT members and get their input.

In many instances, an initial field reconnaissance will have occurred before the initial LLPT Meeting. However, as discussed in Subsection 6.3.7 of this document, this reconnaissance activity could follow the initial LLPT Meeting, depending on the local situation.

The LLPT Meetings may be held in-person, via conference call, or via the Internet. Decisions regarding where and when to hold meetings will be based on the local logistical situation, availability of members, and the complexity of the levee system being evaluated.

**This Document Has Been Superseded.
For Reference Only**

6.6.3. MEETING ATTENDEES

The FEMA Regional Office representative is to assure that all LLPT members are invited to all LLPT Meetings. (See Subsection 6.5.3 of this document for a list of potential LLPT participants).

6.6.4. MEETING MESSAGES

The message for the initial LLPT Meeting (and subsequent meetings) continues to be “Living with levees - It’s a shared responsibility”. The specific message to the LLPT is that FEMA recognizes that unique local levee conditions exist, and the FEMA Regional Office representative will work with the other LLPT members and use local data and input to determine how best to analyze and map hazards in levee-impacted areas. An additional message is that, while FEMA has the final decision-making authority on how the flood hazards landward of the non-accredited levee system will be analyzed and mapped, the process for reaching that decision will emphasize an interactive exchange of information and ideas among the LLPT members.

6.6.5. PRE-MEETING ACTIVITIES

The following activities will occur before the initial LLPT Meeting:

- The FEMA Regional Office representative will send an invitation email to the first LLPT Meeting (and all subsequent meetings) to each LLPT member.

- The FEMA Regional Office representative will provide LLPT members with introductory briefings and training materials on the procedures for analyzing and mapping non- accredited levee systems.
- The Project Team will conduct an initial data analysis, discussed in Subsection 6.4.4 of this document, to provide an overview of alternative approaches for various levee reaches. This could include any draft maps or other results that would be helpful to communicate the impact of different approaches.
- The Project Team will develop a summary of data and information obtained during the data collection and reconnaissance efforts.

6.6.6. MEETING ACTIVITIES

During the LLPT Meeting(s), the FEMA Regional Office representative will:

- Explain the LLPT Meeting objectives and the need for transparency.
- Inform the LLPT members that meeting minutes to document who attended and what happened at the meeting will be produced and made available to all stakeholders.
- Provide a summary of the background of the flood hazard mapping project.
- Provide a summary of the levee analysis and mapping process.
- Answer any questions about the levee analysis and mapping process and the briefing and training information previously provided.
- Summarize the following information:
 - Meeting messages
 - Results from the data collection efforts
 - Results from the initial data analysis, including any draft map and USACE Levee Screening Tool results
 - Possible alternative approaches for analyzing and mapping flood hazards landward of the levee system(s)

**This Document Has Been Superseded.
For Reference Only**

6.7. Levee Analysis and Mapping Plan (Figure 12, Element 400)

The LLPT will use the data available to select the appropriate procedure to analyze and map the flood hazards landward of the levee system(s) being considered. The initial evaluation will be an estimate of the natural valley floodplains. This information can provide an initial sense of where flooding may occur landward of the levee system. If other information is available, such as an

estimate of a levee breach analysis/map, the LLPT will also use that information. Some examples of key considerations in selecting the appropriate levee analysis and mapping procedure are as follows:

- Levee system characteristics
- Data availability
- 44 CFR 65.10 deficiency type
- Length/size of the levee system and/or levee reach
- Levee crest profile versus BFEs
- Levee system performance history
- Accreditation status of levee system on current, effective NFIP map(s)
- Flooding characteristics
- Contributing drainage area
- Terrain data
- Population consequence, risk, and population information
- Community, Tribe, levee owner, and/or local project sponsor willingness to contribute data or analyses

**This Document Has Been Superseded.
For Reference Only**

The LLPT may discover that a restoration project for the levee system is underway through coordination with State, community, or Tribal officials; levee owners; and/or OFAs, including USACE. FEMA has not revised the regulatory requirements provided in 44 CFR 61.12 for new construction projects that have made adequate progress toward completion, nor the regulatory requirements provided in 44 CFR 65.14 for decertified levee systems that are being restored to base flood hazard-reduction capability. (See Figure 12, Element 500.)

Once the LLPT has completed its deliberations, the Project Team will produce a final version of the Levee Analysis and Mapping Plan. The Plan will include the following:

- Copies of the data developed, including agendas, meeting minutes, attendance sheets, and correspondence
- Summary of the data and information collected when they were received, type, and source
- Summary of data, documentation, and information FEMA expects to receive from stakeholders, including the recommended timeframe for delivery

- Flood hazard analysis and mapping options based on data that are already available and timeframe for when data to be collected by stakeholders is to be provided to FEMA

In addition to the Levee Analysis and Mapping Plan, FEMA will use the data and information collected to update the NLD if data collected during this phase came from sources other than the NLD. See Chapter 3 of this document for more information on reporting updates to levee data documentation and inventory. FEMA will provide the final version of the Levee Analysis and Mapping Plan and database to the levee stakeholders with whom FEMA coordinated during the data collection and stakeholder engagement process, including all LLPT members.

6.8. Additional Data Collection (Figure 12, Element 410)

In some cases, the Levee Analysis and Mapping Plan may include a summary of data FEMA expects to receive from stakeholders that may affect the reach approaches used and the recommended timeframe for delivery of the additional data. The timeframe for the community providing additional data will depend on many factors, including:

- Whether the levee system was previously provisionally accredited
- Type of data being collected
- Planned project schedule, if the levee is part of a larger watershed or countywide flood hazard mapping project
- Contractual timeframes between the FEMA Regional Office and other Project Team members (i.e., CTPs, Risk MAP providers)
- Size and complexity of the levee system.

**This Document Has Been Superseded.
For Reference Only**

Table 3 presents suggested ranges of timeframes for supplying additional data. Because the appropriate timeframe for supplying additional data will depend on many factors, the chosen timeframe should fit the actual project conditions, but should generally not exceed the upper limits of the listed ranges.

Table 3: Suggested Timeline for Additional Data

<i>Data Type</i>	<i>Timeframe Range</i>		<i>Stakeholder Responsible for Data</i>
	<i>Previous PAL Designation</i>	<i>No Previous PAL Designation</i>	
Elevation Information for the Levee Crest and Toe	Up to 2 months	Up to 6 months	Levee Owner/Community
Operations and	Up to 3 months	Up to 3 months	Levee Owner/Community

Data Type	Timeframe Range		Stakeholder Responsible for Data
	Previous PAL Designation	No Previous PAL Designation	
Maintenance Plan			
Structural Design Requirements	Up to 6 months	Up to 18 months	Levee Owner/Community
Inspection Reports	Up to 2 months	Up to 2 months	Levee Owner/Community
Evaluation of Overtopping Erosion Potential	Up to 18 months	Up to 18 months	Levee Owner/Community

6.9. System-Wide Analysis and Mapping Procedures (Figure 12, Element 610)

For non-accredited levee systems, the Project Team will combine four major components to develop the final flood hazard information reflected on the FIRM:

1. A system-wide, or a reach-based analysis for long levee systems, Zone D area developed using the Natural Valley Procedure.
2. A system wide SFHA based on an interior drainage analysis developed assuming the levee system remains in place.
3. Merged SFHAs determined from the appropriate levee reach procedures detailed in Section 6.10 of this document.
4. An SFHA developed for the flooding source side of the levee system assuming the levee system remains in place.

A registered P.E. must sign and seal all engineering data developed for each procedure, and this will satisfy the certification requirements of 44 CFR 65.2 and 44 CFR 65.10(e). If required, structural, operations, maintenance, and overtopping analysis data submitted by a levee owner or community will be reviewed for completeness.

6.9.1. NATURAL VALLEY ZONE D

FEMA will represent the uncertainty of the hazards associated with the non-accredited levee system(s) through use of the Zone D designation. FEMA uses the Zone D designation on a FIRM to identify areas of undetermined, but possible, flood hazards. In the future, FEMA may define and adopt another zone designation through the regulatory process.

The Project Team will depict any area within the Natural Valley footprint that is not an SFHA as Zone D on the FIRM. The Project Team will use the Zone D designation to identify the area of possible

base flood hazard that exists because the levee system is non-accredited. The Project Team will determine this area using the Natural Valley Procedure (discussed in Section 6.12 of this document). This is similar to the process used to determine the Zone X (shaded) areas for accredited levee systems.

The Zone D designation is used for non-accredited systems instead of the Zone X (shaded) designation used for accredited levee systems because the flood hazard potential is greater and more uncertain than with accredited levee systems.

If levee systems exist on both sides of a flooding source, or multiple systems that overlap exist, the Project Team will determine the extents of the Zone D area for each system independently, assuming the other systems remain in place.

Additional reach-based analysis may be necessary, when the system-wide natural valley analysis underrepresents the flood hazard (where lower base flood elevation results in reduced SFHA) landward of the levee system, such as for excessively long levee systems. In such cases, the project team will analyze each reach independently, and map the composite area as SFHA or Zone D as appropriate. Analysis of reaches can also be performed using a similar procedure.

6.9.2. INTERIOR DRAINAGE ANALYSIS

The Project Team will evaluate the adequacy of the interior drainage systems and map an SFHA for the base flood where applicable. Interior drainage associated with levee systems usually includes storage areas, gravity outlets, pumping stations, and other residual flooding, or a combination thereof. In performing the interior drainage analyses, the Project Team will assume that all sections of the levee and associated structures will remain intact in their current condition.

Judgment will be required to determine if the interior drainage systems need to be analyzed. The FEMA Regional Office representative will decide how to analyze and map interior drainage after consultation with the community officials, levee owner(s), and/or local project sponsor(s), and the Project Team. If the potential for mappable flooding exists on the landward side of the levee system due to interior flooding, the Project Team will perform an interior drainage analysis. If the Project Team used the Natural Valley Procedure (discussed in Section 6.12 of this document or Structural-Based Inundation Procedure (discussed in Section 6.13 of this document) for the entire system, no additional interior drainage analysis may be required if those flooding conditions would result in flooding more extensive than the interior drainage analysis.

USACE Engineer Manual (EM) [EM 1110-2-1413, Engineering and Design - Hydrologic Analysis of Interior Drainage Areas \(or subsequent updates on this topic\)](#), provides guidance and criteria for performing an interior drainage analysis for levee systems, including joint probability analyses.

6.10. Levee Reach Analysis and Mapping Procedures (Figure 12, Element 620)

In addition to the system-wide hazard mapping associated with the Natural Valley Procedure, the levee system may be divided into reaches (see Figure 15) to develop additional SFHA. A levee reach is defined as any continuous length of a levee system to which a single technical procedure may be applied. A levee reach has no minimum or maximum length requirement. Individual reaches can be analyzed using the following procedures:

- Natural Valley Procedure
- Structural-Based Inundation Procedure
- Overtopping Procedure
- Freeboard Deficient Procedure
- Sound Reach Procedure

The Project Team may apply each procedure, except for the Sound Reach Procedure, at both the reach and system levels. The Sound Reach Procedure cannot be used because a levee system of sound reaches would be considered an accredited levee. The Project Team will complete the analysis of a single reach with all other levee reaches intact.

**This Document Has Been Superseded.
For Reference Only**

The Project Team will merge the flood hazard information that results from the analyses of the individual levee reaches within the system along with any interior drainage flood hazards. The result will be a composite SFHA delineation landward of the levee system. As mentioned in Subsection 6.9.2 of this document, the Project Team will designate any area within the Natural Valley footprint that is not SFHA as Zone D.

No stakeholder data or documentation is required for applying the Natural Valley Procedure. In situations where FEMA is not provided with the data/documentation required for use in the reach analysis procedures, the Project Team will apply the Natural Valley Procedure at the reach or system level.

The Project Team will apply the reach analysis procedures and corresponding stakeholder data requirements shown in Table 4 when analyzing non-accredited levee systems. It is the responsibility of the community, Tribe, levee owner, and/or local project sponsor to provide the data/documentation to support the standards in Table 4 for the levee reach if that approach is to be applied.

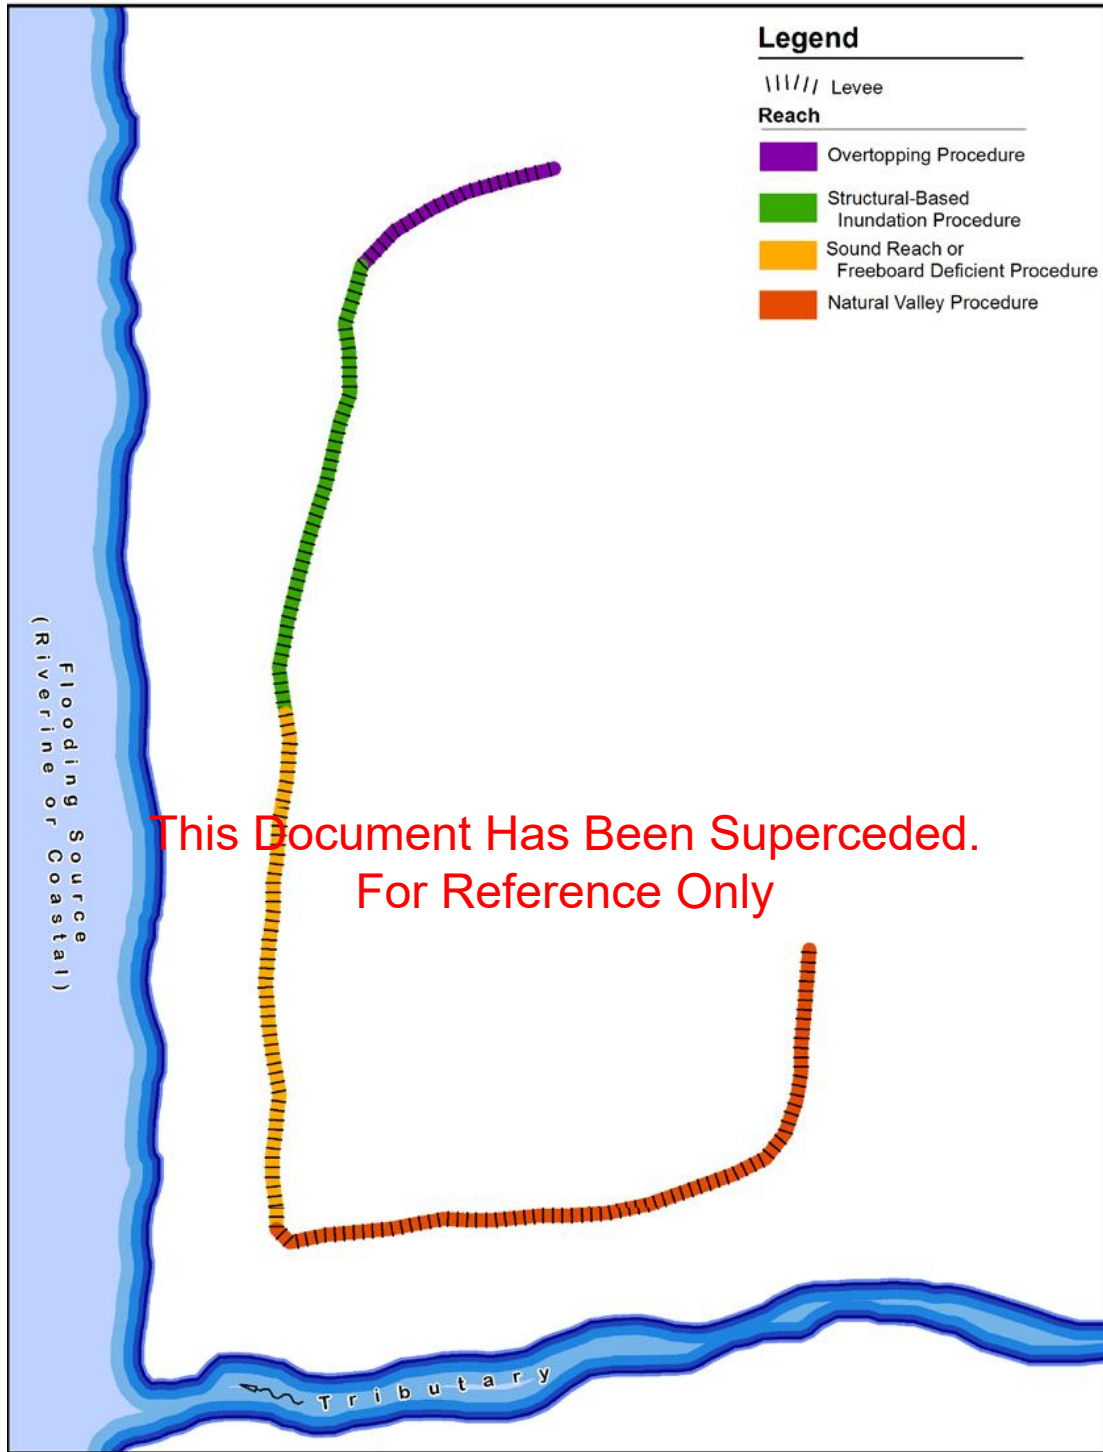


Figure 15: Example Segmentation of a Levee System

Table 4: Summary of Stakeholder Data Standards for Reach Analysis Procedures

<i>Data Element</i>	<i>Applicable Portion of CFR</i>	<i>Reach Analysis Procedures</i>				
		<i>Sound</i>	<i>Freeboard Deficient</i>	<i>Overtopping Approach</i>	<i>Structural Based Inundation</i>	<i>Natural Valley</i>
Elevation Information for Levee Crest and Toe	N/A	Required	Required	Required	Required	N/A
BFE + Freeboard Less than Levee Crest	44 CFR 65.10(b)(1)	Required	N/A	N/A	N/A	N/A
BFE Less than Levee Crest	N/A	Required	Required	N/A	N/A	N/A
O&M Plan	44 CFR 65.10(c)	Required	Required	Required	Recommended	N/A
Structural Design Standards	44 CFR 65.10(b)(2) – 44 CFR 65.10(b)(7)	Required	Required	Required	N/A	N/A
Inspection Reports	44 CFR 65.10(c)(2)(iv)	Required	Required	Required	Recommended	N/A
Evaluation of Overtopping Erosion Potential	N/A	N/A	N/A	Required	N/A	N/A

This Document Has Been Superseded.
For Reference Only

Surveyed elevation data for the levee crest and levee toe, if required, must meet FEMA standards. All engineering data submitted for each of the procedures must be signed and sealed by a registered P.E. The registered P.E.’s signature and seal have the same meaning as the certification required by the NFIP regulations as cited at 44 CFR 65.2 and 44 CFR 65.10(e). Review of this data shall be performed as described in Section 4.3 of this document.

FEMA will not fund any efforts solely related to certifying data for levee accreditation or making determinations of the levee’s structural conditions.

6.11. Natural Valley Procedure (Figure 12, Element 620)

The Natural Valley Procedure can be applied to all non-accredited levee system reaches to determine the SFHA and to determine the Zone D area. Factors that the Project Team will need to consider when determining whether to use the Natural Valley Procedure to determine the SFHA for a reach are provided below.

6.11.1. HYDRAULIC SIGNIFICANCE OF THE LEVEE REACH

In some cases, a levee reach is so significantly overtopped during the peak of the base flood event that the existence of the levee does not have a noticeable effect on the water-surface elevation (WSEL). Techniques and items to consider for this situation are included in Subsection 6.12.5.

6.11.2. AVAILABILITY OF DATA

If no data are available to support the other procedures, the Project Team will apply the Natural Valley Procedure. In some locations, the SFHA shown on the effective FIRM for the flooding source side of the non-accredited levee system is based on a Base Level study and, therefore, the SFHA is designated as Zone A or Zone V. In these locations, FEMA will evaluate the need for new modeling of the flooding source for performing the Natural Valley Procedure. If the need does not exist, the SFHA shown for the effective flooding source mapping will continue to be designated Zone A. If the need exists, the SFHA for the flooding source may be designated Zone A or Zone AE, depending on the modeling method(s) used.

6.11.3. NEEDS OF THE COMMUNITY

Because of the limited data requirements and resources required to analyze a levee reach using the Natural Valley Procedure, a community may prefer to use this method. Therefore, the community may also request that FEMA use the Natural Valley Procedure.

The Project Team will model and map the natural valley floodplain landward of the non-accredited levee systems as an SFHA, except when an additional analysis indicates an alternate treatment. The Project Team will only depict the natural valley floodplain landward of non-accredited levee systems as Zone D when the Freeboard Deficient, Sound Reach, Overtopping, or Structural-Based Inundation Procedure is implemented.

**This Document Has Been Superseded.
For Reference Only**

6.11.4. DATA OR DOCUMENTATION REQUIREMENTS

No data or documentation are required from community officials, levee owners, and/or local project sponsors to proceed with the Natural Valley Procedure.

6.11.5. TECHNICAL PROCEDURES

Using the Natural Valley Procedure, the Project Team will model the flooding along the levee reach by allowing the discharge to flow freely on either side of the levee for the entire levee reach. The levee will not impede conveyance in the model. For riverine levee reaches, topographic features of the levee should be in-place in the model, if possible, but not allowed to obstruct lateral flow (see Figure 16). Figure 17 shows an example of an SFHA delineation when the Natural Valley Procedure is applied to a reach of a non-accredited levee system.

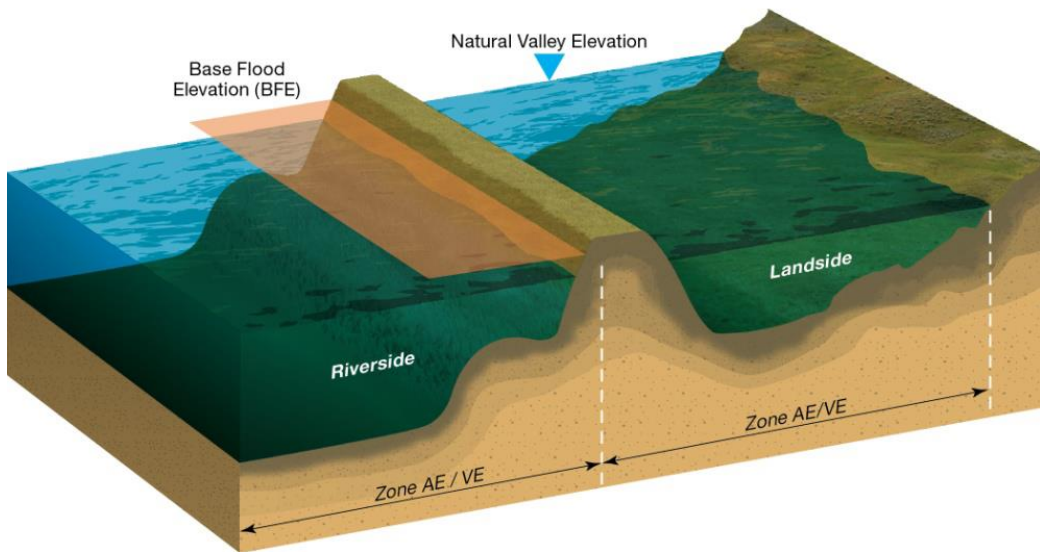


Figure 16: Natural Valley Cross-Section View

**This Document Has Been Superseded.
For Reference Only**

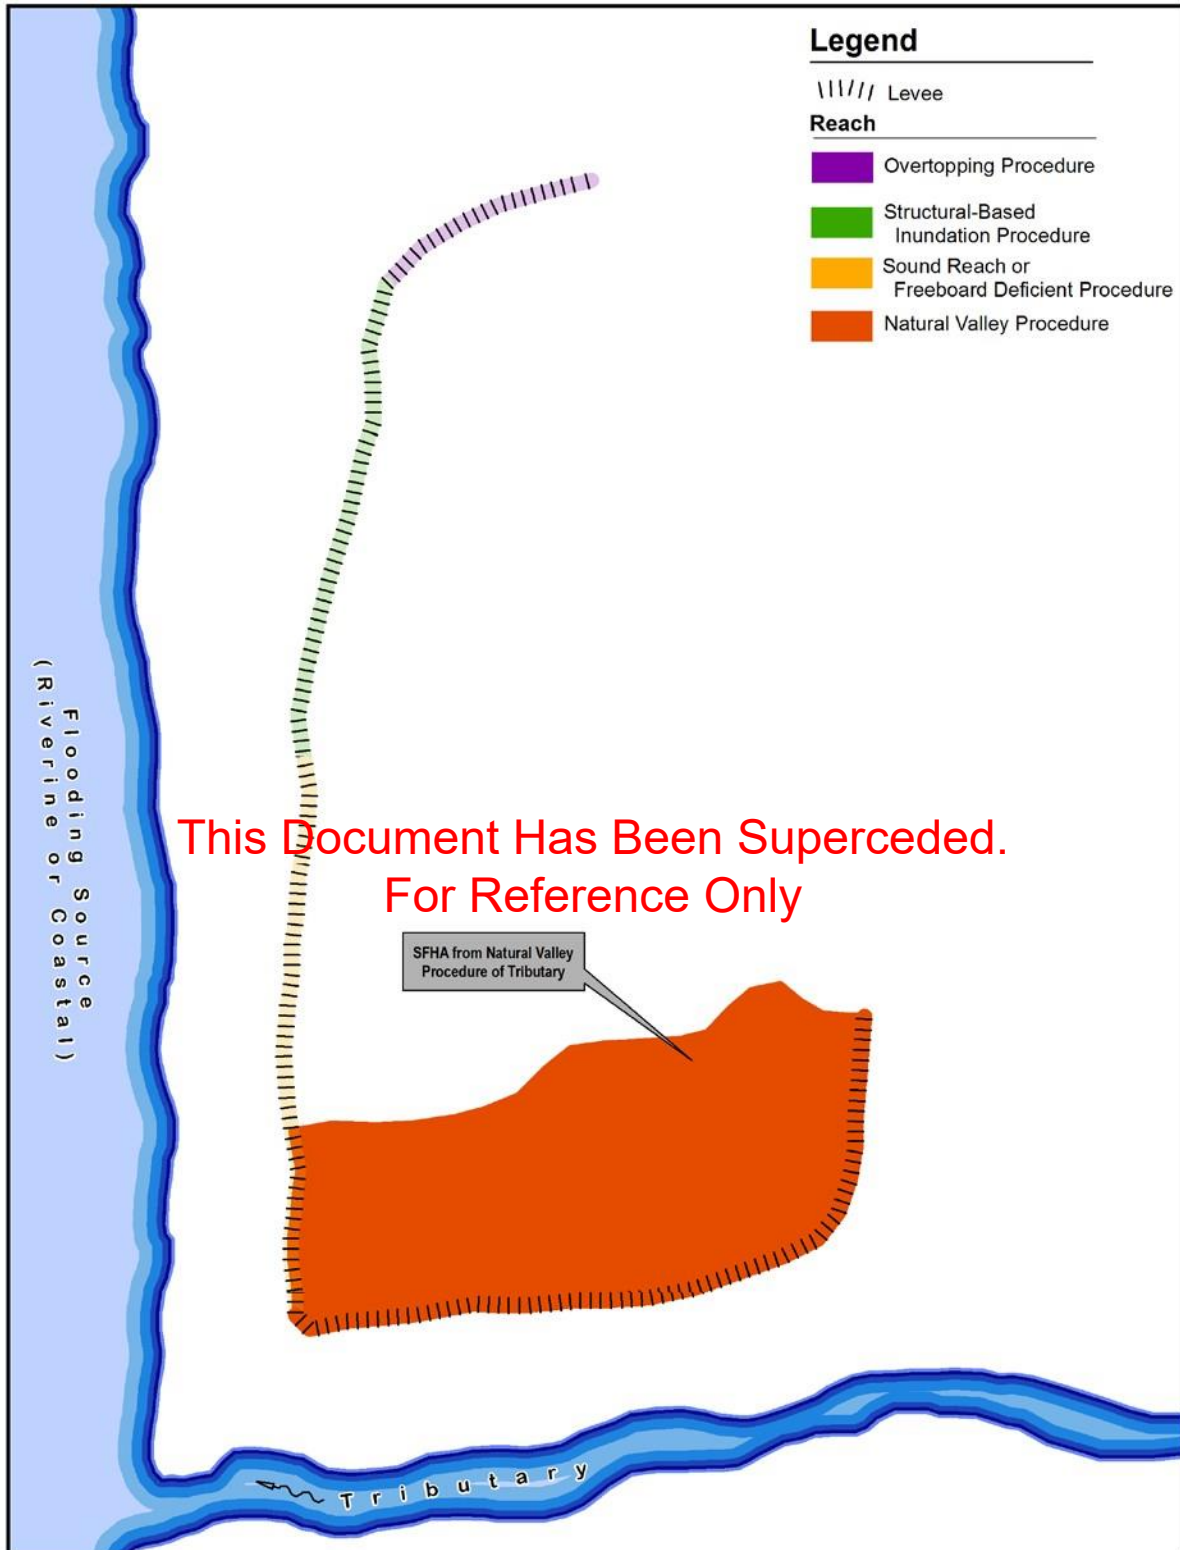


Figure 17: SFHA Delineation Using Natural Valley Procedure

Testing the Hydraulic Significance of the Levee Reach for Riverine Levees

Characteristics of the levee reach that may indicate the levee is not hydraulically significant include:

- Levee/floodwall is fully submerged, and landward conveyance is in the direction of the riverflow.
- Lateral exchange of flow across a levee that is overtopped is insignificant or does not exist because the water level on the landside of the levee equalizes with the flooding source.
- Height of the levee/floodwall is low compared to the WSEL over the crest of the levee/floodwall for the majority of the length of the levee/floodwall, as outlined in Section 6.13.

Modeling the Natural Valley Procedure on Levees Subject to Riverine or Lacustrine Flood Forces

Using the Natural Valley Procedure, the Project Team will model the riverine levee reaches by leaving the topographic features of the levee in the model, if possible, but allowing the discharge to flow on either side of the levee, as shown in Figure 16. The levee will be modeled as not impeding conveyance.

6.11.6. COASTAL LEVEE SITUATIONS

Coastal non-accredited levees subject to flood forces will be intact within the storm surge model setup to determine peak storm surge elevations seaward of the levees. In these situations, the Project Team will consider how the levee system will influence wave propagation. The team will then assume a steady-state condition landward of the levee and will extend the BFE landward of the non-accredited levee until it intersects the ground elevation (or the levee on the opposite side, in the case of a ring levee). The Project Team will evaluate the potential of waves forming again landward of the levee. The Project Team may apply a similar procedure when a detailed storm surge model is not available.

6.11.7. NATURAL VALLEY LETTER OF ACCEPTANCE

A community's agreement for using the Natural Valley Procedure for the levee system(s) may be documented in a "Natural Valley Letter of Acceptance." The FEMA Project Officer will provide the template for the Natural Valley Letter of Acceptance. In preparing this letter, the Project Team is to follow the appropriate concurrence process, as determined by the FEMA Project Officer, so that the letter is properly reviewed and approved.

6.12. Structural-Based Inundation Procedure (Figure 12, Element 620)

In some instances, levee systems have reaches with either known structural deficiencies or a lack of data to support one of the other procedures. For levee reaches that fall into this category, FEMA developed the Structural-Based Inundation Procedure to identify the limits of the base flood that may result from the potential levee failure. This procedure relies on the modeling of levee breaches along the levee reach.

Predicting the exact location of a future breach to a levee or floodwall is not possible. The Structural-Based Inundation Procedure, therefore, does not predict the probability of failure at any breach location nor does it provide a specific determination or evaluation of the overall levee system performance or require a determination of the likely failure mechanism. Implementation of the procedure instead results in the development of an SFHA based on the flood hazard due to potential breaches along a particular levee reach during a base flood event.

6.12.1. DATA REQUIREMENTS

The only mandatory data required are accurate top-of-levee and toe-of-levee elevations. However, in certain circumstances, FEMA may require the following information to apply the Structural-Based Inundation Procedure, which should follow the standards of 44 CFR 65.10:

- O&M Plan. Details of the O&M Plan standard are provided in 44 CFR 65.10(c).
- Structural design standards. Structural design should meet minimum design standards including data regarding closures in 44 CFR 65.10(b)(2), embankment protection in 44 CFR 65.10(b)(3), embankment and foundation stability in 44 CFR 65.10(b)(4), settlement in 44 CFR 65.10(b)(5), and any other design standards in 44 CFR 65.10(b)(6).
- Inspection reports. The standard for documentation of inspection is provided in 44 CFR 65.10(c)(1)(iii) and 44 CFR 65.10(c)(2)(iv).

**This Document Has Been Superseded.
For Reference Only**

No freeboard or WSEL requirements apply to the Structural-Based Inundation Procedure. Therefore, the Project Team will apply this procedure when the levee crest is lower than the base flood level, but high enough to impede flow.

6.12.2. TECHNICAL PROCEDURES

Methods to identify possible locations of system breaches, modes of failure, geometry, failure triggers, and failure duration for use in mapping the base flood resulting from the breaches are described in these subsections. Given the number and nature of assumptions inherent in this procedure, FEMA will allow flexibility in the use of the Structural-Based Inundation Procedure to enable the use of engineering judgment. In rural settings, where levee systems reduce the hazard to primarily agricultural lands, yet the levees are hydraulically significant, simplification of the approach may be warranted to limit analysis costs that would not result in significantly different flood hazard mapping.

Determination of Modeled Breach Locations

The locations of possible levee breaches could be determined using the method described below.

- Select initial breach locations for each levee reach, one representing a breach location near the downstream end of the levee reach and another near the upstream end of the levee reach.

- Determine the hydrograph through each breach, also known as “the breach hydrograph”, and independently analyze the hazard for the base flood landward of the levee for each breach.
- Combine the resulting flood hazard boundary delineations into a composite SFHA delineation.
- Make an initial judgment, through examination of the terrain landward of the levee and/or preliminary modeling results, on whether the selected breach locations will result in a reasonable identification of the flood hazard. The flood hazard will be considered to have been reasonably identified when all potential storage areas and flow paths that can be reached by breach flows are reflected in the flood hazard mapping (as Zone AE, Zone AH, and/or Zone AO). The final SFHA on the landside of a reach using the Structural-Based Inundation Procedure must reflect the fact that a breach may occur at any location along the reach.
- Add additional breach locations to the initial locations if additional breaches can change the flood elevations or the extent of the composite flood hazard area significantly.

The assigned Project Team member generally will place the breach locations to capture the full flood hazard on the landside of the levee. The assigned team member will base exact locations on breach potential indicators, such as greatest overtopping depth, past breach locations, encroachment or known seepage locations, or changes in levee material or shape. For coastal areas, the assigned team member will also consider levee exposure to waves and potential wave runoff.

This Document Has Been Superseded.
For Reference Only

Time of Breach Initiation

The time that a breach is assumed to be triggered will influence the peak flow and volume through the breach. For an overtopping breach, the assigned Project Team member will conduct a sensitivity analysis to estimate the breach initiation time that produces the most reasonable SFHA. The team member will choose the time that produces the most reasonable case using sound engineering judgment. For an internal failure analysis, the breach failure should initiate at the peak flood stage, unless information that suggests a different breach initiation time is appropriate.

Another option for the assigned Project Team member to consider when determining at what point to initiate the breach is the point in time when the water rises to an elevation at which the levee fails to meet all standard engineering criteria. This will be before peak stage in most cases.

Breach Shape

A rectangular shape extending vertically from the levee crest to the riverside toe elevation will be adequate to describe the breach shape, unless additional analysis determines breach side slopes are important and necessary for accurate modeling of the breach. The minimum breach width will be 100 feet for clay levees and 500 feet for sand levees. These minimum accepted breach widths are based on a qualitative review of the historic breach width information available. However, levee attributes and sound engineering practice should support the breach width chosen.

Based on an evaluation of historic breach widths, typically breach widths should be larger than these minimum accepted values. The breach width estimation may consider levee embankment height, levee material, crest width, depth and duration of overtopping, longitudinal velocity, area impacted by the levee, distance from the flooding source, and duration of flooding event. The method to estimate breach width will be based on sound engineering judgment, adjusted by comparing to historical documented levee breaches where available.

The assigned Project Team member will provide adequate justification for the choice of breach parameters. Unless other information is available, the team member will assume that the breach will extend vertically to the bottom of the levee.

Empirical Methods for Estimating Breach Shape

Dam Breach Equations

Several authors have developed empirical equations to estimate breach size, shape, and failure time for dam breaches. The equations are based on examination of historical data for dam breaches. Levee failures generally end with much wider breach bottom widths than dams, relative to the height of the levee/dam. The wide breach width may be caused in part by the erosive sheer force of floodflow parallel to levees and in part by the tendency for the hydraulic head over the breach to remain elevated for a longer period. Dam breach parameter empirical equations may be applicable to levees in some situations, but justification for their use will be needed if they are chosen for the levee breach width computation.

This Document Has Been Superseded.
For Reference Only

Historical Levee Breach Information

If available, historic levee breach information is an important tool in determining breach shape and development time. No nationwide compendium of historic breach information is available, but the assigned Project Team member performing the analysis will search for historical breach information.

Physically Based Models for Estimating Breach Shape

Where appropriate information is available to do so, the Project Team may use physically based breaching models. These models can be based on erodibility of the levee and levee foundation, levee, and levee foundation soil type, levee vegetative cover, flood stage, and flood duration.

When floodwalls fail, it is typically a partial breach as one or more sections (i.e., monolith) formed during the floodwall construction are forced apart by escaping water. When conducting a breach analysis on a floodwall, the assigned Project Team member will need to determine the number of sections that might fail as the breach width is based on the particular structure, available documentation, and engineering judgment. The minimum expected breach width for a floodwall is one section (i.e., monolith).

Development Time

Typically, the Project Team member can set the time for breach formation (the time from breach initiation to the time full breach width is realized) to zero to simplify the analysis. If the assigned team member determines that the breach formation time would have a significant impact on the breach hydrograph, the assigned member may need to consider this variable in the analysis.

Sensitivity Analysis

A Project Team will conduct sensitivity analysis to evaluate the effects that varying the levee breach width and failure initiation time will have on the resulting flood hazards, within reasonable limits. This sensitivity analysis will include widening and narrowing the levee breach width within reasonable bounds and investigating the impacts of different breach initiation times. As the parameters are varied, the assigned team member will note the impacts to the peak discharge, volume through the breach, and the SFHA. In general, the final parameters chosen by the assigned team member will represent the most reasonable flood hazard that result from the parameters evaluated.


To test the impact of failure initiation time, the assigned Project Team member will conduct a calculation initiating the breach at the point of overtopping of the levee on the ascending or rising limb of the flood hydrograph. Also, the assigned team member will perform a breach calculation at the time to peak flood stage, but not greater than 2 hours after overtopping begins. The team member may extend the duration of overtopping if technical calculations, prepared by a registered P.E., are provided by the community, Tribe, levee owner, and/or local project sponsor to indicate that the levee can withstand additional overtopping without failure. The assigned team member will compare breach flows or hydrographs and will use the one that produces the most reasonable flood hazard landward of the levee.

For coastal levees, the sensitivity analysis will include testing related to the duration of a storm surge hydrograph.

This Document Has Been Superseded.
For Reference Only

6.12.3. MAPPING BREACH ANALYSIS RESULTS

The SFHA shown on the FIRM will be based on a composite of the base flood hazard developed at each breach location. (See Figure 18.) Figure 19 shows an example of an SFHA delineation when the Structural-Based Inundation Procedure is applied to a reach of a non-accredited levee system. The Project Team will assure that the final SFHA reflects the fact that a breach may occur at any location along the Structural-Based Inundation levee reach. The modeled breach locations should not be apparent in the final SFHA delineation or BFEs.

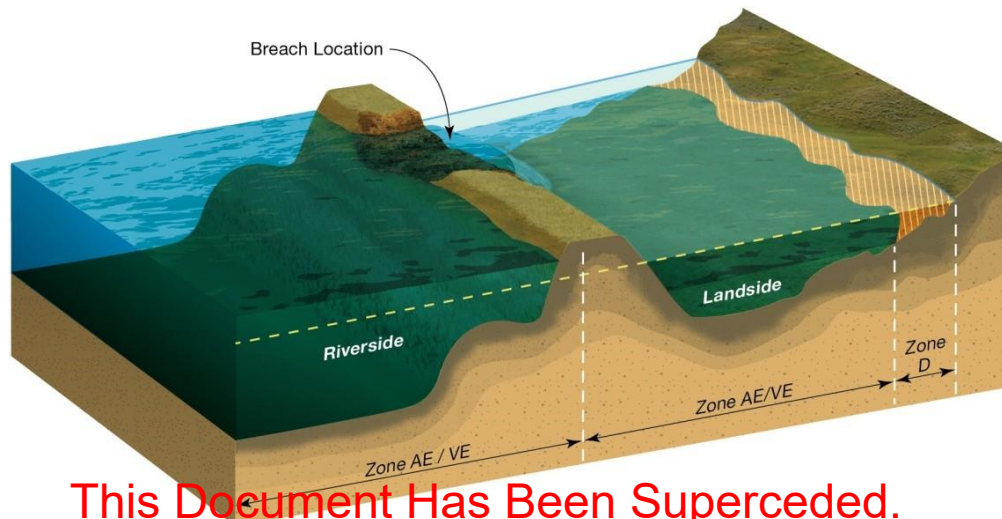

**This Document Has Been Superseded.
For Reference Only**

Figure 18: Structural-Based Inundation Cross-Section View

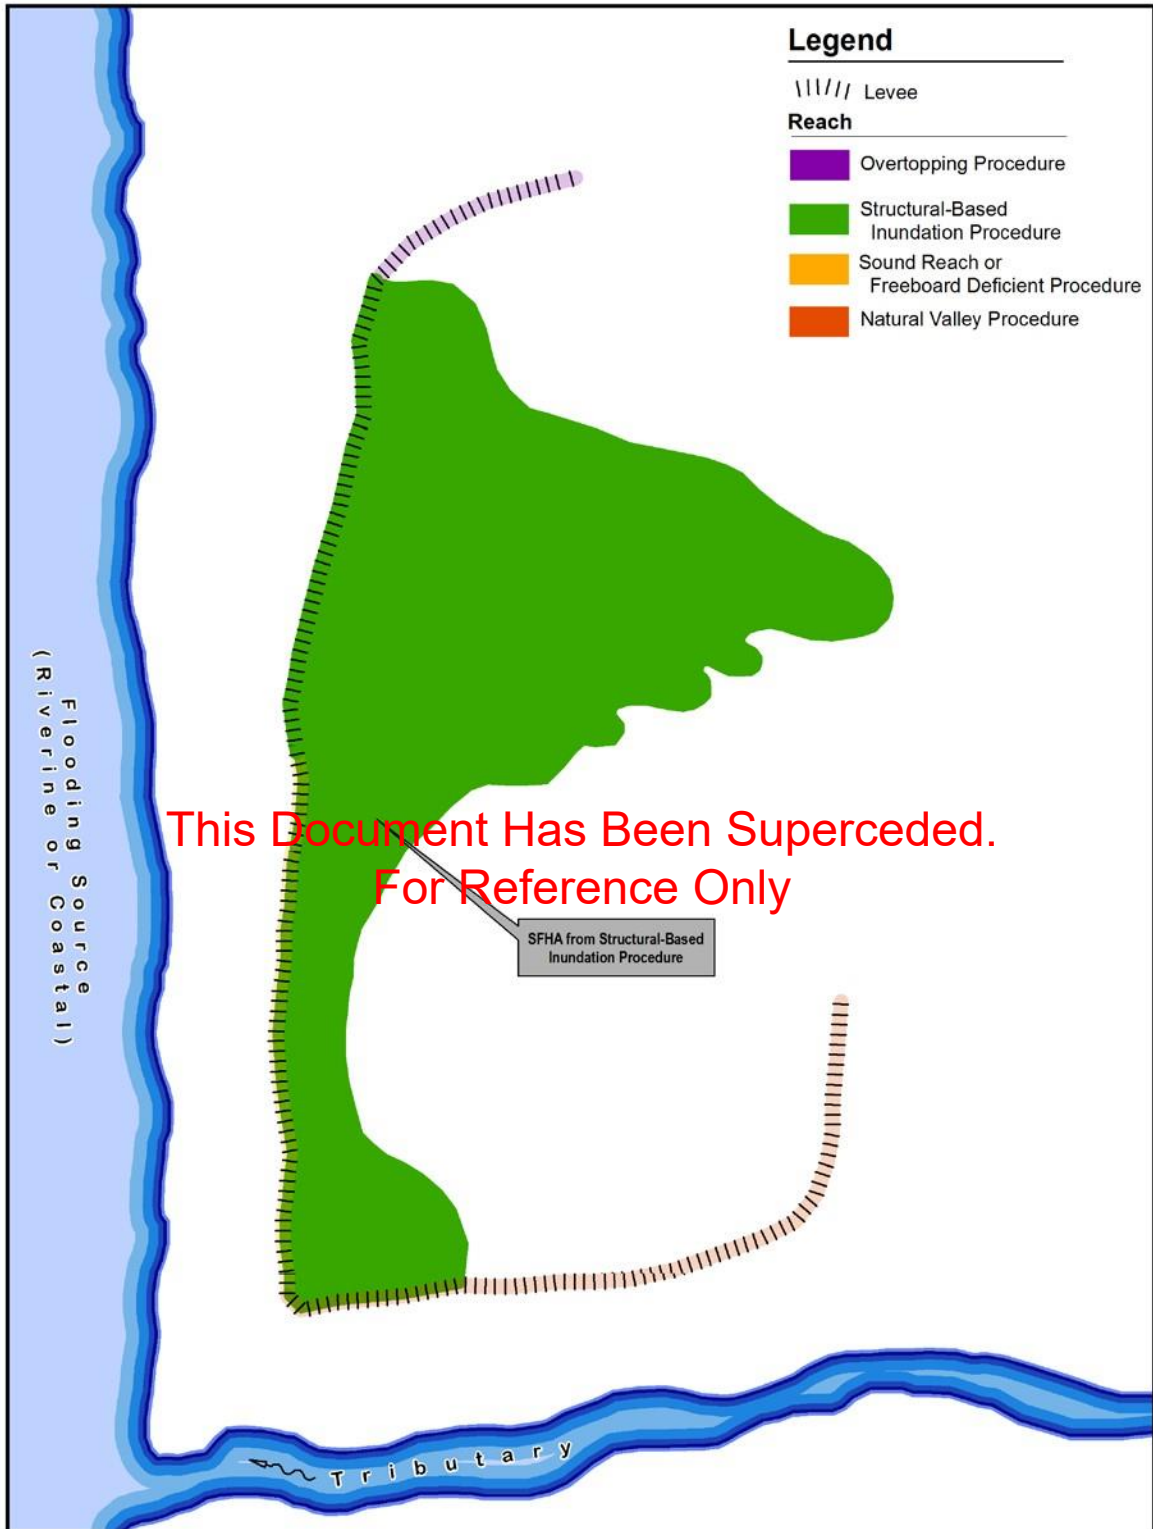


Figure 19: SFHA Delineation Using Structural-Based Inundation Procedure

6.13. Overtopping Procedure (Figure 12, Element 620)

In some instances, levee systems have locations that have been specifically armored to sustain overtopping flows or the rate of overtopping flow is sufficiently small or of sufficiently short duration that the system would not fail during the base flood. The Overtopping Procedure can be applied when the BFE is above the levee crest for a reach, but it can be demonstrated that the base flood event will not cause structural failure and the levee reach meets all standards of 44 CFR 65.10 except 44 CFR 65.10(b)(1).

6.13.1. DATA REQUIREMENTS

For the Overtopping Procedure to be used for a reach, the community, levee owner, or local levee sponsor must submit an analysis, signed, and sealed by a registered P.E., to FEMA. This analysis must indicate that no appreciable erosion of the levee crest, toe, embankment, or foundation occurs during the overtopping of the base flood event because of either currents or waves. The analysis must also demonstrate that the anticipated erosion will not result in structural failure. Failure is defined as breach of the levee, directly or indirectly, through loss of embankment material due to erosive forces, the reduction of the seepage path, or piping and subsequent instability. In addition, the community, levee owner, or local levee sponsor must submit documentation to meet the following standards from 44 CFR 65.10 to FEMA:

- O&M Plan. Details of the O&M plan standard are provided in 44 CFR 65.10(c).
- Structural design standards. Structural design must meet minimum design standards, including data regarding closures in 44 CFR 65(b)(2), embankment protection in 44 CFR 65.10(b)(3), embankment and foundation stability in 44 CFR 65.10(b)(4), settlement in 44 CFR 65.10(b)(5), interior drainage in 44 CFR 65.10(b)(6), and any other design standards as detailed in 44 CFR 65.10(b)(7).
- The structural design documentation should also include a discussion if the failure of an adjacent levee could affect the structural integrity reach if that adjacent levee reach is not categorized as Sound or Freeboard Deficient.
- Inspection reports. The standard for documentation of inspection is provided in 44 CFR 65.10(c)(1)(iii) and 44 CFR 65.10(c)(2)(iv).
- Elevation information for the levee crest and toe.
- Certified as-built drawings

All items must be signed and sealed by a registered P.E.

In addition to the standards detailed in 44 CFR 65.10, more expansive structural documentation as well as O&M documentation will be required for these reaches to certify the overtopping analysis. These are detailed further in the subsections below.

Loading Conditions Used for Evaluation

For the loading conditions used for evaluation, the certifying P.E. will use the base flood event plus a factor of safety, such as an elevation freeboard, that takes into account uncertainty in the data. The factor of safety used will depend on the levee reach and engineering judgment. For example, the factor of safety will vary when unique tie-in conditions exist, or control structures are present. Because of the uncertainty in depth and duration of the overtopping flows, a factor of safety will typically be applied when considering the structural stability of the levee reach.

Armored Surfacing

Based on the certified engineering analysis submitted, a community, levee owner, and/or local project sponsor may be able to demonstrate that armoring is not required for a levee reach to fall within this scenario. However, in most cases, armoring will be expected. Some of the reasons for armored surfacing include:

- Some indication that flow along the levee reach may cause some erosion that will initiate levee breaching
- A lack of proper and continuous maintenance that would result in a non-continuous, nonuniform surface, including the lack of irrigation, fertilization, and annual inspections
- Concerns about localized irregularities, which lead to flow anomalies, because available survey data may not be indicative of localized conditions along the levee reach
- Local conditions, on the landside of the levee, include the presence of dips, depressions, or protrusions (including trees, posts, or other surface anomalies)
- Traffic rutting along the levee crest that induces non-uniform crest conditions, in terms of both levee profile and structural condition
- Difficulty in establishing and properly maintaining a dense and continuous grass cover (in semi-arid and arid regions)
- Debris carried by flood flow that could induce damage to the protective surfacing
- A small amount of damage to a dry or cracked embankment, leading to a catastrophic failure during overtopping
- Risk reduction in high-impact areas

The items below may be considered when determining the viability of an armored surface:

- History of Events. Flood levels, overtopping locations, damage assessments, and maintenance records can be considered to evaluate the damage that occurred during past overtopping events, especially if depth and duration can be established and evidence shows minor to no damage

occurred. If the levee has experienced piping or sand boils, the stability of the levee should be questioned. These data will not be used to change the accreditation determination made at the beginning of the levee analysis and mapping process.

- Potential freeboard loss due to subsidence or localized settlement. Frequent, accurate surveys are critical so that an adequate safety factor is maintained in an area where long-term settlement and regional subsidence are common.
- Overtopping height and overtopping flow rate (cubic feet per second). Velocity and tractive-force calculations are key considerations to assess erosion potential.
- Overtopping duration. Levee design discharge or stage hydrographs indicating minutes, hours, or days of anticipated overtopping are especially critical for grass-covered levees.
- Uplift potential and maximum induced shear stress along the interface between the armored surfacing and the overtopping flow. Adequacy of the selected armoring scheme must be demonstrated for given site conditions.
- Resiliency of levee material. Granular and sandy soils will require surface armoring for small rates and depths of flow.
- Flow concentration potential. Surface discontinuities and irregularities can lead to irregular hydraulic flow patterns. Armoring is to be provided if gullies, tire tracks, access roads, fences, utility poles, animal burrows, cattle paths, roads, bike trails, or other conditions may exist that will concentrate flow. For grass-lined levees, the downstream slope can be evaluated to determine if it is uniform from crest to toe, with no interruptions or irregularities such as dips, depressions, or protrusions (e.g., trees, posts, or other surface anomalies).
- Effect of debris on flow patterns. Armored reaches can be subject to damage from flood-borne debris.
- Levee toe protection. This is especially required at the location of eddies, groins, and hydraulic jumps. The depth and thickness of toe protection need to be considered.
- Levee armoring alternatives. Alternatives include soil cement, articulated concrete blocks, roller-compacted concrete, gabions, geocells, and rock chutes. Each alternative will have placement thickness recommendations and associated components/feature design considerations (e.g., tieback levees, sub-drainage, anchoring requirement).
- Wind and wave action. The impact of breaking waves over the levee should be evaluated.
- Cavitation potential. How overtopping flows will affect armored surfacing should be evaluated.
- Levee height. Low levees may be more tolerant to overtopping.

- Interior side slopes. Flatter slopes (i.e., > 4H: 1V) are more tolerant. This is especially important for grass-covered levees.
- Inspections. Inspection frequency is especially important for grass-covered levees or after historical events where overtopping occurs, or the levees have been stressed.
- Validity of the O&M Plan. The O&M Plan should provide confidence in emergency planning that minimizes the effects of overtopping, including the impact at overtopping location(s) and interior drainage.
- Filter capability and free-draining bedding. Filter materials should be protected from high rates of flow.

Additional Considerations for Levees Subject to Coastal Flood Forces

A levee reach subject to coastal flood forces will need to include adequate embankment protection, foundation, and embankment stability. The levee reach will need to be designed, constructed, operated, and maintained to resist wave effects (potentially including wave overtopping and storm surge to resist erosion) and prevent flooding of interior areas landward of the levee crest.

For levee reaches subject to coastal flood forces with minimal freeboard, armored surfacing will need to be considered on both the seaward side and landsides of the coastal levee, including the crest, to ensure that the levee reach can withstand the wave forces to which the levee is subjected. Further discussion about armoring coastal levees is presented in USACE CERC-89-15, Criteria for Evaluating Coastal Flood Protection Structures.

Technical Procedures

If the appropriate data are provided as detailed in Subsection 6.14.1, the assigned Project Team member will route the flooding source hydrograph over the levee reach with the levee remaining intact. The assigned team member will then model the flooding landward of the levee system to determine the SFHA. (See Figure 20.) Figure 21 shows an example of an SFHA delineation when the Overtopping Procedure is applied to a reach of a non-accredited levee system.

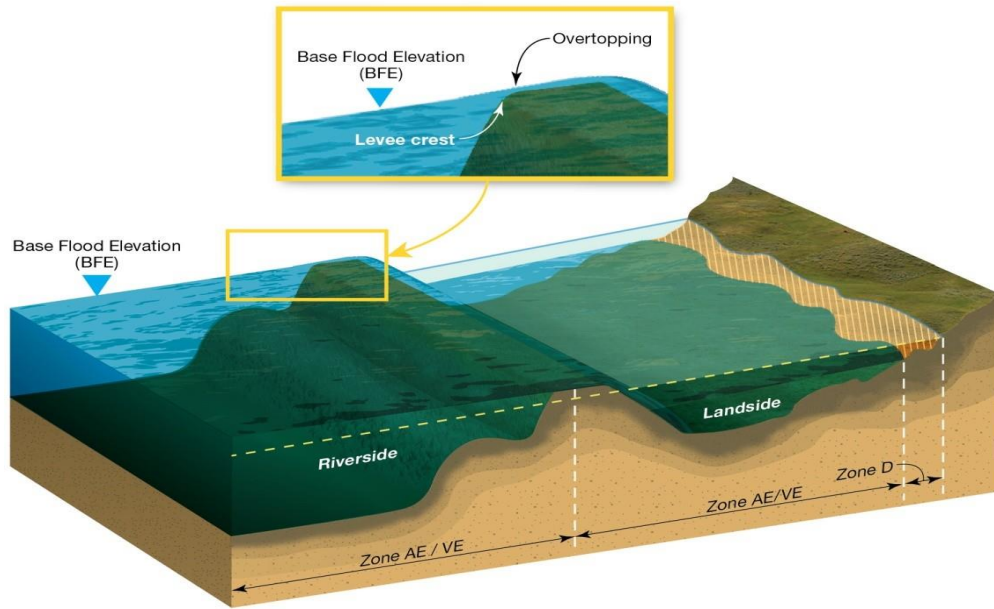


Figure 20: Overtopping Cross-Section View

**This Document Has Been Superseded.
For Reference Only**

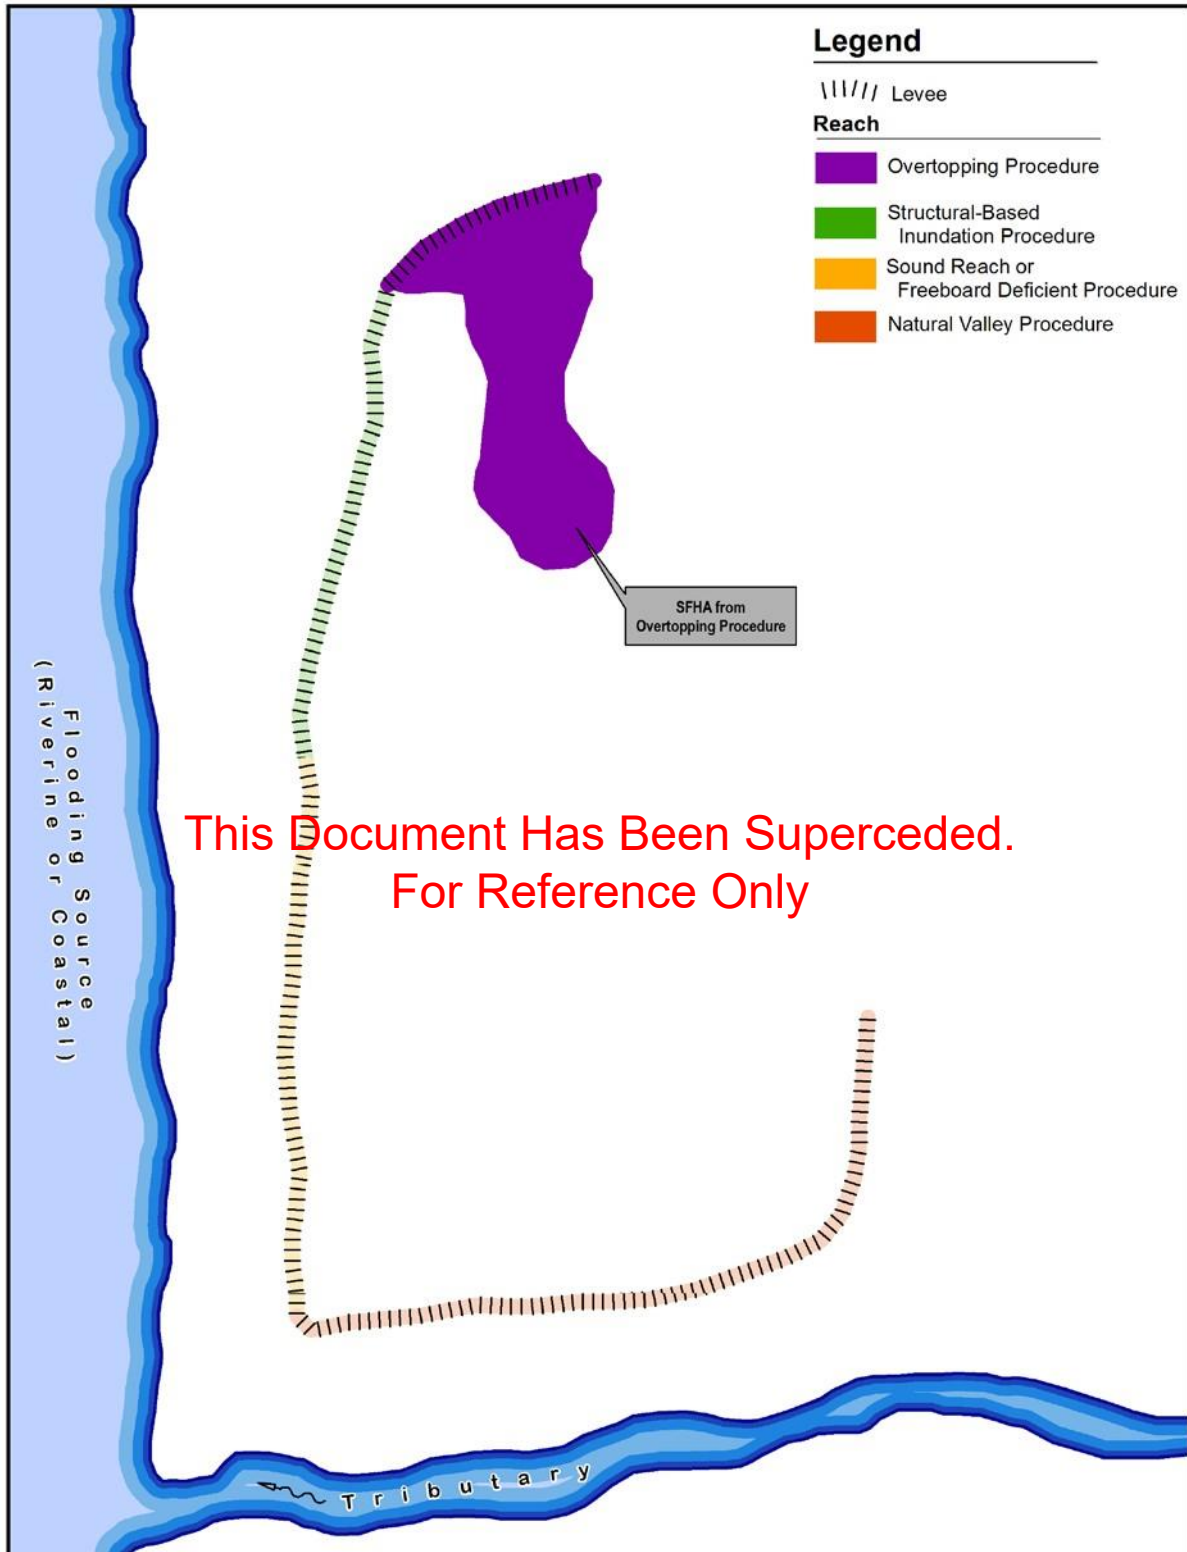


Figure 21: SFHA Delineation Using Overtopping Procedure

6.14. Freeboard Deficient Procedures (Figure 12, Element 620)

The Freeboard Deficient Procedure can be applied to reaches where the levee system meets the structural standards of 44 CFR 65.10, lacks adequate freeboard, and has a documented O&M Plan.

6.14.1. DATA REQUIREMENTS

To designate a levee reach as a Freeboard Deficient levee reach, the community, levee owner, or local levee sponsor must submit documentation to meet the following standards from 44 CFR 65.10 to FEMA:

- The top of the levee crest and closure structures along the entire reach must be above the BFE.
- O&M Plan. Details of the O&M Plan standard are provided in 44 CFR 65.10(c).
- Structural design standards. Structural design must meet minimum design standards, including data regarding closures in 44 CFR 65(b)(2), embankment protection in 44 CFR 65.10(b)(3), embankment and foundation stability in 44 CFR 65.10(b)(4), settlement in 44 CFR 65.10(b)(5), interior drainage in 44 CFR 65.10(b)(6), and any other design standards as detailed in 44 CFR 65.10(b)(7).
- The structural design documentation should also include a discussion of whether the failure of an adjacent levee could affect the structural integrity reach if that adjacent levee reach is not categorized as a Sound Reach or Freeboard Deficient levee reach.
- Inspection reports. The standard for documentation of inspection is provided in 44 CFR 65.10(c)(1)(iii) and 44 CFR 65.10(c)(2)(iv).
- Elevation information for the levee crest and toe.
- Certified As-built drawings.

All items must be signed and sealed by a registered P.E.

FEMA will review the submittal in accordance with the appropriate sections of Chapter 4 of this document.

6.14.2. TECHNICAL PROCEDURES

No reach-specific modeling is required for a reach evaluated using the Freeboard Deficient Procedure, but the Project Team will map the system-wide Zone D area landward of the levee system for these reaches. (See Figure 22.) The SFHAs from the system-wide interior drainage analysis and/or adjacent levee reaches where different procedures have been applied may still be present on the landside of the levee with Freeboard Deficient levee reaches. This will depend on the presence of interior ponding areas and other terrain features on the landside of the levee.

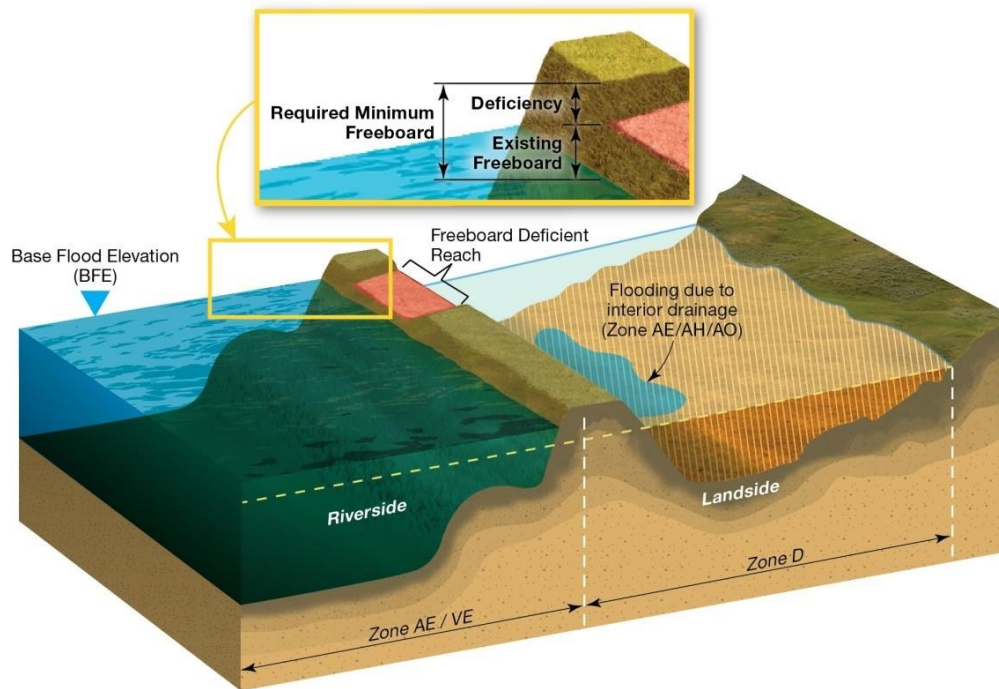


Figure 22: Freeboard Deficient Cross-Section View

This Document Has Been Superseded.

6.15. Sound Reach Procedure (Figure 12, Element 620)

A Sound Reach is a levee reach that has been designed, constructed, and maintained, in accordance with sound engineering practices, to withstand and reduce the flood hazards posed by a base flood even if the entire system does not.

6.15.1. DATA REQUIREMENTS

Sound Reaches are part of a levee system that cannot meet accreditation requirements. Because they are only a component of a levee system, they cannot be accredited as a hydraulically independent system.

To designate a reach as sound, the community, levee owner, or local levee sponsor must submit technical data to FEMA to demonstrate that the levee reach will withstand the forces of the 1% annual-chance flood event, and reasonably account for uncertainty. To accomplish this, documentation to meet the following standards from 44 CFR 65.10 must be submitted to FEMA:

- Freeboard. The levee reach must meet the minimum freeboard standards in 44 CFR 65.10(b)(1).
- O&M Plan. Details of the O&M Plan standard are provided in 44 CFR 65.10(c).
- Structural design standards. Structural design must meet minimum design standards, including data regarding closures in 44 CFR 65(b)(2), embankment protection in 44 CFR 65.10(b)(3),

embankment and foundation stability in 44 CFR 65.10(b)(4), settlement in 44 CFR 65.10(b)(5), interior drainage in 44 CFR 65.10(b)(6), and any other design standards as detailed in 44 CFR 65.10(b)(7).

- The structural design documentation should also include a discussion if the failure of an adjacent levee could affect the structural integrity reach if that adjacent levee reach is not categorized as Sound or Freeboard Deficient.
- Inspection reports. The standard for documentation of inspection is provided in 44 CFR 65.10(c)(1)(iii) and 44 CFR 65.10(c)(2)(iv).
- Elevation information for the levee.
- Certified as-built drawings.
- All items must be certified and sealed by a registered P.E.

FEMA will review the submittal in accordance with Chapter 4 of this document.

6.15.2. TECHNICAL PROCEDURES

No levee reach-specific modeling is required for a Sound Reach, but the Project Team will map the system-wide Zone D landward of the levee for these reaches. The SFHAs from the system-wide interior drainage analysis and/or adjacent levee reaches may still be present on the landside of Sound Reaches. (See Figure 23.) This will depend on the presence of interior ponding areas and other terrain features on the landward side of the levee. The SFHAs that form these areas will supersede the system-wide Zone D areas, as applicable.

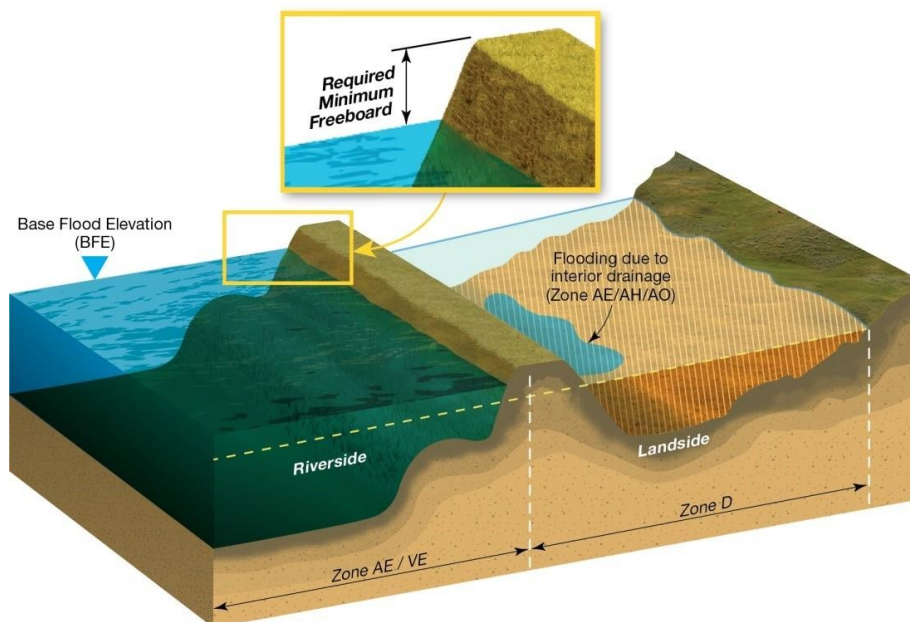


Figure 23: Sound Reach Cross-Section View

6.16. Flood Hazards Evaluated by Flooding Source (Figure 12, Element 630)

The assigned Project Team member will analyze and map the BFEs on the riverside of the levee assuming that all levee reaches remain intact. If a levee is overtopped and flow would be lost to the landside of the levee, the assigned team member may consider those losses and may reduce flow in the main flooding source in accordance with FEMA Guidance Document No. 80, Guidance for Flood Risk Analysis and Mapping - Hydraulics: One Dimensional Analysis, which is accessible from the FEMA Guidelines and Standards for Flood Risk Analysis and Mapping webpage.

6.17. Hydrograph Development

6.17.1. RIVERINE HYDROGRAPH DEVELOPMENT

Traditionally, projects conducted for flood hazard purposes have only calculated peak-flow or peak-surge elevation. Both the Structural-Based Inundation and Overtopping Procedures will often require a base flood hydrograph to complete the modeling, making the development of a flood hydrograph necessary. Computing and selecting a representative hydrograph shape with an appropriate volume is an important step. For many systems, the hydrograph shape and volume will be a key parameter influencing the resultant SFHA delineations.

FEMA determines that a cost-effective method is needed to estimate flood hydrographs for projects where only peak discharges/surge elevations are available, where a rainfall-runoff model or storm surge model is not available, or where funding is not sufficient to develop a rainfall-runoff or storm surge model. Procedures discussed above will use the base flood hydrograph for the levee analysis, but other flood return frequencies also could be used if appropriate.

The approach presented in this subsection is based on both the availability of data and the type of flooding. For flooding sources with gaging stations near the study location, two methods for developing desired-percent-chance flood hydrographs may be followed:

1. Scale a major (10% annual-chance peak discharge or larger) observed flood hydrograph by multiplying the ordinates by a factor to create the desired-percent-chance flood hydrograph.
2. Develop a balanced synthetic flood hydrograph using peak discharges and N-day volumes.

The above methods for developing flood hydrographs are not the only acceptable approaches. The application of any method, including those above, should be evaluated for reasonableness.

The balanced synthetic flood hydrograph will be used when no major (10% annual-chance peak discharge or larger) observed flood hydrograph is available for scaling to obtain the desired-percent-chance hydrograph, or the volume under the observed flood hydrograph is not considered representative of the desired-percent-chance hydrograph.

To scale a smaller hydrograph to a larger hydrograph, the assigned Project Team member will plot several observed flood hydrographs to determine a representative hydrograph shape that can be scaled to become a desired-percent-chance flood hydrograph. The observed hydrograph with the

largest peak discharge and volume is the most logical choice. Unit discharge data are available from the [USGS Instantaneous Data Archive](#) for many gaging stations from the late 1980s through September 2007. Since October 1, 2007, the unit discharge data are available on the National Water Information System (NWIS).

The discharge ordinates of the representative observed hydrographs can be scaled by multiplying them by a ratio of the desired-percent-chance peak discharge to the observed peak discharge (or the reverse ratio if scaling down the observed hydrograph). If the gaging station drainage area is within 50% of the drainage area of the study location, the assigned Project Team member can transfer the desired-percent-chance hydrograph upstream or downstream using the ratio of drainage areas and regional flood frequency relations. Scaling the peak discharge also scales the flood volume with the time base of the hydrograph held constant (basin lag time assumed constant for a given watershed).

The above procedure is valid for steady flow. For unsteady flow, the Project Team member must take volume into consideration for hydrograph development.

The balanced synthetic hydrograph can be constructed using desired-percent-chance flood volumes for different durations (e.g., 1-day, 3-day, 7-day). The N-day flood volumes can be obtained from daily discharge data in the NWIS. Some of the available computer programs for estimating the desired-percent-chance N-day flood volumes include the USACE Hydrologic Engineering Center Statistical Software Package (HEC-SSP) and USGS Surface-Water Statistics (SWSTAT) computer program. The balanced synthetic hydrograph is shaped using an observed major flood hydrograph. More information on this method is provided in the [USBR Flood Hydrology Manual](#) and in USACE Engineer Manual 1110-2-1415, [Hydrologic Frequency Analysis](#) (or subsequent updates on this topic).

If the effective FIS Report was based on a rainfall-runoff model, the assigned Project Team member can use that model to obtain the appropriate flood hydrograph for ungagged watersheds. If a rainfall-runoff model was not developed for the effective FIS Report, a rainfall-runoff model may have been developed for other purposes, such as a master drainage plan. If available, the team member can scale the flood hydrographs from that model to be consistent with the peak discharges developed for the effective FIS Report.

If a continuous simulation rainfall-runoff model is available, then several simulated flood hydrographs are available. The assigned Project Team member can scale the simulated flood hydrograph with largest volume and peak discharge to get the desired-percent-chance flood hydrograph.

If no rainfall-runoff model is available, it may be feasible for the assigned Project Team member to develop a simplified rainfall-runoff model for a single watershed area with no subdivision and no channel/reservoir routing or model calibration. The team member can scale the flood hydrographs from this model to be consistent with peak discharges determined from other methods.

Examples of dimensionless unit hydrographs are provided in Figure 24, where the vertical ordinate is a ratio of discharge (Q) to the peak discharge (Q_p) and the horizontal ordinate is a ratio of time (t) to basin lag time (T_L) to time to peak (T_p).

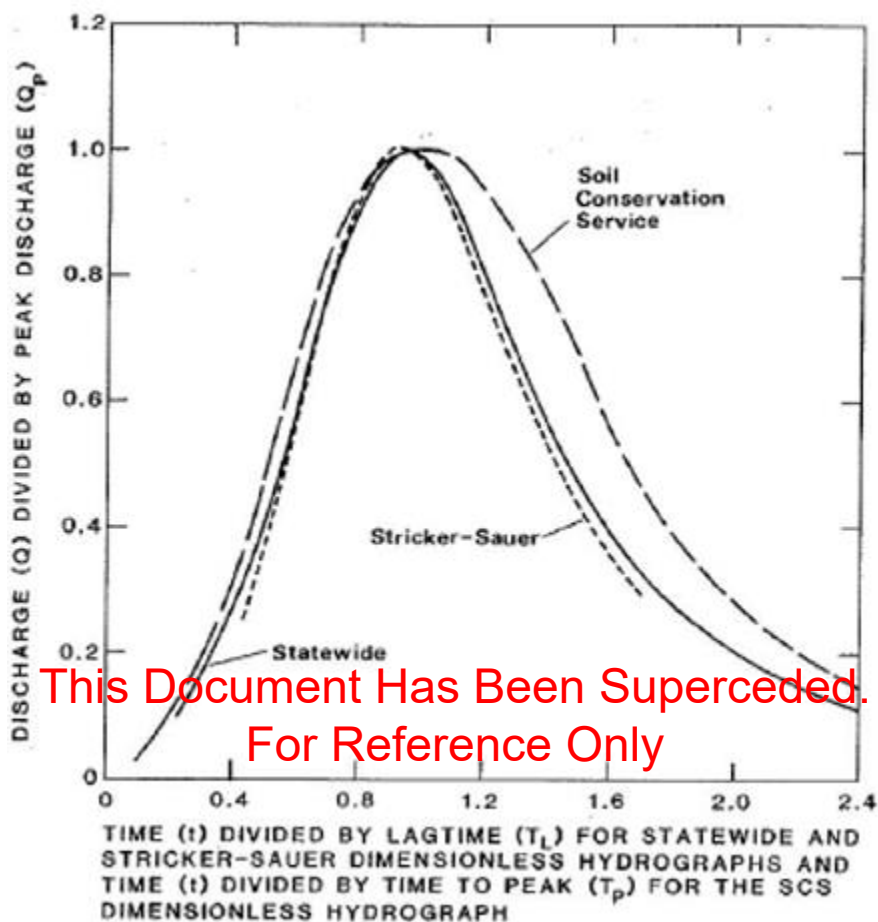


Figure 24: Sample Dimensionless Unit Hydrograph

The “Statewide” hydrograph in Figure 24 was developed by E. J. Inman in USGS Water-Supply Paper 2317, Simulation of Flood Hydrographs for Georgia Streams, using data for 80 gaging stations in Georgia. This dimensionless hydrograph is implemented in the USGS National Streamflow Statistics (NSS) Computer Program. The “Stricker-Sauer” hydrograph (USGS Open- File Report 82-365, Techniques for Estimating Flood Hydrographs for Ungaged Urban Watersheds), was theoretically developed from Clark unit hydrograph procedures. The “SCS” dimensionless hydrograph is described in Chapter 16, Part 630, Hydrology, of the Natural Resources Conservation Service (NRCS) National Engineering Handbook. The USGS dimensionless hydrographs shown in Figure 24 (Stricker-Sauer) can be converted to desired-percent-chance flood hydrographs by multiplying the discharge ratio by the desired-percent-chance peak discharge and the time ratio by basin lag time. The resultant flood hydrograph is assumed to be a typical flood hydrograph for a desired-percent-chance peak discharge. There is no implication that the volume under the hydrograph has a desired-percent

chance of being exceeded. The desired-percent-chance peak discharge and the basin lag time are watershed- specific characteristics that determine the shape of the hydrograph.

Other flood hydrograph estimation methods developed by State, regional, and local agencies can be used in a similar manner. In the more arid regions of the Western United States, methods developed by State, regional, and local agencies may be particularly relevant because the USGS national dimensionless hydrograph was developed for streams in Georgia and other USGS statewide analyses are generally restricted to the Eastern United States.

In addition to the Georgia dimensionless hydrograph (“statewide”) available in the USGS [NSS program](#), the USGS has developed dimensionless hydrographs for several other states:

- *Water-Resources Investigations Report 89-4076*, Techniques for Simulating Flood Hydrographs and Estimating Flood Volumes for Ungaged Basins in East and West Tennessee.
- *Water-Resources Investigations Report 89-4087*, Determination of Flood Hydrographs for Streams in South Carolina: Volume 1. Simulation of Flood Hydrographs for Rural Watersheds in South Carolina.
- *Water-Resources Investigations Report 97-4279*, Techniques for Simulating Peak-Flow Hydrographs in Maryland.

The dimensionless hydrographs developed for other states agree reasonably well with the Georgia dimensionless hydrographs, but the state-specific hydrographs are to be used if available. For ungaged streams that are not regulated by flood-control structures, the dimensionless hydrograph method may be used to estimate the desired-percent-chance hydrograph.

The desired-percent-chance peak discharge for rural and urban ungaged watersheds may be estimated from USGS regression reports or from other regression equations developed for the study area. The basin lag time may be estimated by regression equations given in USGS reports on dimensionless hydrographs, many of which are summarized in Appendix B of USGS Techniques and Methods 4-A6, [The National Streamflow Statistics Program: A Computer Program for Estimating Streamflow Statistics for Ungaged Sites](#), and other regression equations developed for basin lag time. The basin lag time as used in the USGS dimensionless hydrograph approach is the time from the center of mass of rainfall excess to the center of mass of runoff.

Using rainfall-runoff data for 81 watersheds in Maryland, in [Estimation of Time of Concentration for Maryland Streams](#), Thomas and others demonstrated that the basin lag time used to define the USGS dimensionless hydrograph was, on average, only 5% less than the watershed time of concentration. Therefore, basin lag time as defined above may be approximated by the time of concentration as estimated by the NRCS travel time method documented in Technical Release 55, [Urban Hydrology for Small Watersheds](#).

The balanced synthetic hydrograph method described above for gaged streams may also be applied to ungaged streams by implementing the method below.

- Estimate N-day volumes (e.g., 1-day, 3-day, 7-day) at gaging stations in the vicinity of the ungaged streams.
- Develop regression equations for estimating the desired-percent-chance N-day volumes for ungaged streams.
- Construct a balanced synthetic hydrograph with the desired-percent-chance N-day volumes.

This method is more time consuming, but it may be used if the dimensionless hydrograph method does not provide reasonable results or in areas where the dimensionless hydrograph method may not be applicable.

6.17.2. COASTAL HYDROGRAPH DEVELOPMENT

For coastal analyses, one way to create a synthetic storm surge hydrograph is using procedures in the Federal Highway Administration (FHWA) Hydrologic Engineering Circular No. 25, Tidal Hydrology, Hydraulics, and Scour at Bridges. If data from a detailed coastal model are not available. The required variables for the method are:

- Peak surge elevation (S_p)
- Forward speed of the storm (f)
- Radius of maximum winds (R)

**This Document Has Been Superseded.
For Reference Only**

S_p is given directly from the published BFE noted in the FIS Report, while a range of values for both R and f are possible for a given location.

Coastal Flood Risk Projects based on modern methods involving Joint Probability Method (JPM) analysis contain enough information about the range of storm parameters that a representative R and f to associate with the value of S_p can be calculated directly. For flood hazard mapping projects where the Project Team did not employ a JPM approach for determining the BFE, these values may need to be estimated by examining historical storms in the region.

Pilot tests suggest that the ultimate extent of flooding landward of a breached or overtopped coastal levee is not highly sensitive to the shape of the synthetic hydrograph, so the exact choice for f and D may not be a critical factor. The peak surge and width of failure in a breaching condition is of primary importance within this analysis.

6.18. Regulatory Floodways

For some communities, regulatory floodways may have already been delineated for levee-impacted areas along a flooding source. FEMA has developed an approach for modeling and delineating the regulatory floodway in levee-impacted areas.

The following guiding principles form a basis to support this effort and are discussed in more detail in the subsections that follow:

1. Baseline Model

The baseline model is either the effective model (for the base flood event) if an effective floodway exists or the baseline model does not consider any existing encroachments since the area was first shown on an NFIP map.

2. Surcharge Limits (Values)

NFIP regulations and Standard SID 69 states:

Floodway surcharge values must be less than or equal to 1.0 ft. If the state (or other jurisdiction) has established more stringent regulations, these regulations take precedence over the NFIP regulatory standard. Further reduction of maximum allowable surcharge limits can be used if required or requested and approved by the communities impacted". Standard SID 70 states "If a stream forms the boundary between two or more states and/or tribes, either the 1.0-foot maximum allowable rise criterion or existing floodway agreements between the parties shall be used.

3. Effective Floodway

a. Existing Conditions - Presence of an effective floodway provides a starting point for:

1. Baseline model; and
2. Floodway encroachment.

If no effective floodway exists, then the baseline model using equitable consideration of both overbanks becomes the initial floodway analysis.

b. Proposed or Changed Conditions - If the proposed or changed project results in BFE increases in excess of those permitted under 44 CFR 60.3 (c)(10) or (d)(3), the community must apply for CLOMR per 44 CFR 65.12. CLOMRs are encouraged for all levee projects.

4. Equal Conveyance

Standard SID 73 states: "A methodology based on equitable consideration of both overbanks must be used to establish the minimal regulatory floodway. Variations to this approach must be made in coordination with FEMA and impacted communities.

5. Removal or No Floodway

In some situations, floodways may not make sense if there is already a built-out condition, or other flow conditions not supporting a floodway analysis exists. In these situations, coordination with FEMA and affected communities is needed to come to an agreement on the proper approach.

6. Hydraulically Insignificant Levees (refer to Subsection 6.19.3)

For levees which are considered hydraulically insignificant, that is, the levee does not significantly affect the natural flow through the valley or is significantly overtopped during the base flood event, the floodway is modeled using the Natural Valley Procedure with initial floodway analyses using the current floodway procedures. For mapping purposes, a structure is considered hydraulically insignificant if, during a base flood event, the peak WSELs landward of the structure may be the same regardless of whether the structure was in place.

7. Hydraulically Significant Levees (refer to Subsection 6.19.4)

For levees which are considered hydraulically significant, which can include accredited levees and/or non-accredited levees, the floodway is computed in one of two ways:

- a. Levee on one bank
- b. Levee on both banks

8. Mapping Floodway Boundaries on the Levee

Standard SID 452 states, “Floodway boundaries shall be placed on the riverside of a levee unless the community specifically requests otherwise, or where hydraulic calculations demonstrate a floodway is warranted elsewhere”. Where the floodway boundary lands on the levee, the boundary is placed at the computed location, unless the State or community request otherwise. Some States, who have jurisdiction over the floodways, regularly show the floodway boundaries on the landside toe. The floodway should not extend past the landside toe for an accredited levee without concurrence from the FEMA Regional Office and FEMA Headquarters.

**This Document Has Been Superseded.
For Reference Only**

6.18.1. COORDINATION WITH COMMUNITIES

The regulatory floodway is a community floodplain management tool. While a default approach is presented below, FEMA decisions about the final approach to determining the regulatory floodway will be made in coordination with officials of the affected communities, the levee owner(s), and impacted property owners. In addition, when the jurisdictions along either side of a flooding source are different, coordination between the Project Team, the State NFIP Coordinator(s), and local jurisdictions affected will need to take place before the modeling approach is finalized.

Development and designation of floodways in urban situations where significant development has already occurred may not be beneficial to the community as minor public and homeowner projects will need to demonstrate “no-rise” in the BFE. In such situations, designation of a floodway hinders floodplain management rather than aids it. A more equitable solution could be to actively manage development using the model to prevent development from creating more than the cumulative allowable rise, per the code of federal regulations, if the community has this capability. Such situations require additional coordination among FEMA, the State, and the communities.

6.18.2. FLOODWAY ANALYSIS AND MAPPING METHODS

The floodway should be modeled as described in FEMA Guidance Document No. 79, [Guidance for Flood Risk Analysis and Mapping: Floodway Analysis and Mapping](#). Per this guidance, the baseline

model for the allowable surcharge is the model used to determine the BFEs the first time a floodway was adopted for the reach. Unless it is demonstrated that the model should be revised for reasons other than encroachments into the floodplain, all subsequent revisions to the floodway are limited to the maximum allowable surcharge above the elevations determined in the base model. That way, as hydraulic models are updated to reflect encroachments into the floodway fringe, the cumulative effect of those and future encroachments is limited to the maximum allowable surcharge.

In case of leveed reaches, it is acceptable to compare the floodway WSELs to the "with-levee" BFEs to determine surcharges if acceptable surcharge limit cannot be achieved using the baseline WSEL. In these situations, the methodology outlined in the following subsections limit the floodway encroachments at the levee. Coordination with FEMA and community officials is required in case the encroachment location on the riverside of the levee is warranted. Generally, the floodway analysis in leveed reaches consist of up to three parts:

1. An initial floodway analysis to determine the natural valley based on equitable reduction on both overbanks to set the regulatory floodway location.
2. An intermediate floodway analysis to verify that the allowable surcharges are not exceeded with the levee in place.
3. A final floodway analysis that has surcharges within the allowable limits.

The conditions used for the baseline model and the floodway analyses steps listed above (and described below) could vary on case-by-case basis. Coordination with FEMA and the affected communities will be required in these cases.

**This Document Has Been Superseded
For Reference Only**

6.18.3. HYDRAULICALLY INSIGNIFICANT LEVEES

If a levee is determined to be hydraulically insignificant and the Natural Valley Procedure is used, the regulatory floodway may still extend landward of the levee. The assigned Project Team member will develop the floodway analysis following established standards and procedures. In addition, if the levee is overtopped during the base flood event and a defined flow path must be preserved, the assigned team member may find that a floodway analysis of the flow path may be required.

6.18.4. HYDRAULICALLY SIGNIFICANT LEVEES

If a levee(s) is determined to be hydraulically significant, the procedures outlined below are applied for floodway modeling. It is likely that a combination of the scenarios discussed below will exist at various cross sections along the levee system. The methods described in Subsections 6.19.5 through 6.19.9 can be applied to specific cross sections. However, the Project Team should evaluate consideration of the model as a whole when adjusting encroachment stations due to the impact to surcharge values and community input.

6.18.5. HYDRAULICALLY SIGNIFICANT LEVEES – ON ONE BANK

For streams with no effective floodway, an initial floodway analysis will be developed using the natural valley analysis with current standards and procedures. For streams with an effective floodway, an initial floodway analysis is performed using the natural valley analysis with the effective floodway encroachment stations to verify that the allowable surcharge limits can still be met. If the initial floodway analysis resulted in floodway encroachment stations on the riverside of the levee and meeting the allowable surcharge limits, the floodway can be delineated at the computed locations. If the floodway limit is located on the riverside of the levee and the impacted State and/or community with jurisdiction over the floodway requests, FEMA will map the floodway limit on the landside toe of the levee for an accredited levee system. In case of a non-accredited levee system, States or communities may decide to delineate the floodway at the computed location within the levee-impacted area. In these cases, the intermediate steps discussed below are not necessary.

If the initial floodway analysis resulted in a floodway encroachment landward of the levee (see Figure 25), an intermediate floodway analysis can be developed. This is done by maintaining the location of the encroachment stations on the non-leveed side and shifting the leveed-side encroachment stations to the levee line. (See Figure 26.) The resulting regulatory floodway elevations are compared to the baseline without floodway elevations to determine if the surcharges are within the allowable limit. If the surcharges are within the allowable limit, the floodway can be delineated at the location computed in this model.

**This Document Has Been Superseded.
For Reference Only**

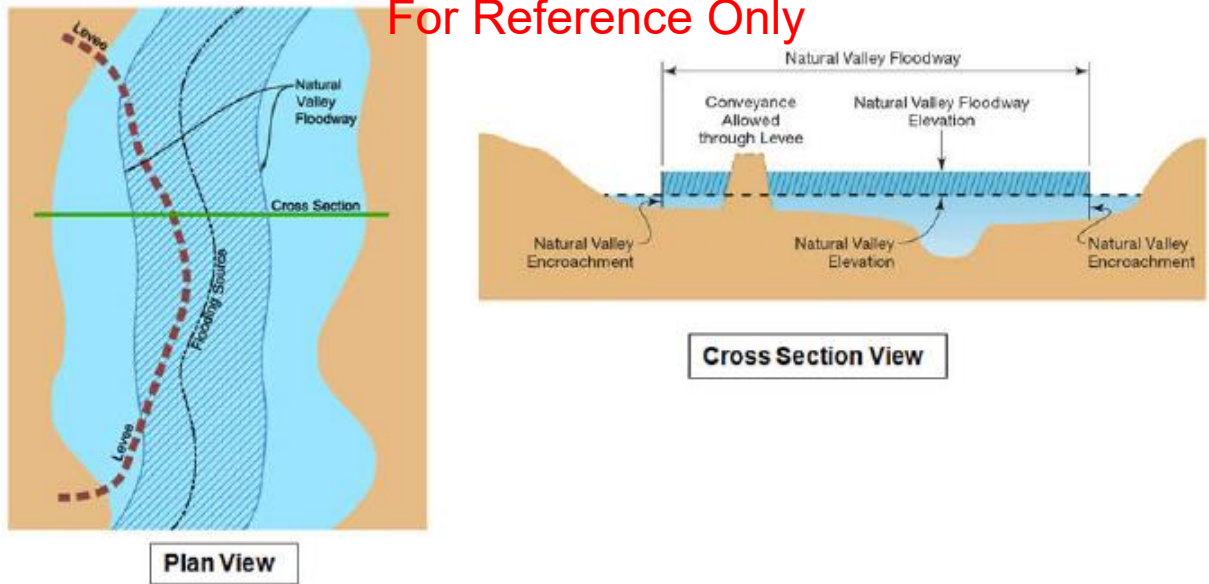


Figure 25: Floodway Analysis Process Initial Analysis

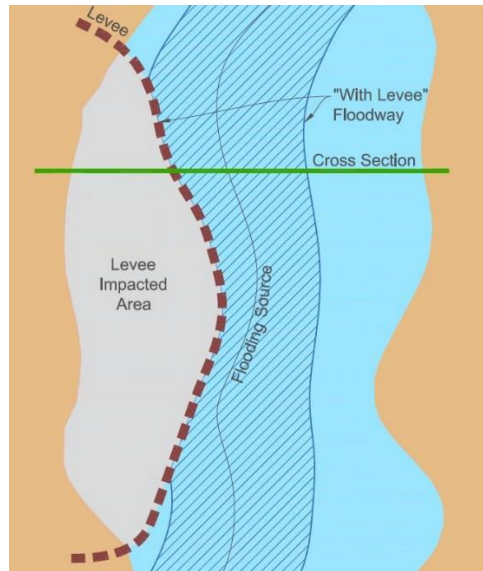


Figure 26: Floodway Analysis Process Initial Analysis

If surcharge in the intermediate floodway model exceeds the maximum allowable limit, the regulatory floodway on the non-levee side is widened to bring the surcharge within the allowable limit, as shown in Figure 27. This condition would require coordination with the State or community officials and affected property owners. If the surcharges cannot be kept within allowable limit by widening the non-levee side, the surcharge can be reevaluated by comparing the results of the intermediate floodway analysis to the with-levee BFE. Situations may arise where it is not possible to bring the floodway surcharge within allowable limit by widening the floodway or evaluating the surcharges against the with-levee BFEs. In these situations, coordination among community officials, affected property owners, and FEMA is required to determine the most appropriate approach.

This Document Has Been Superseded
For Reference Only

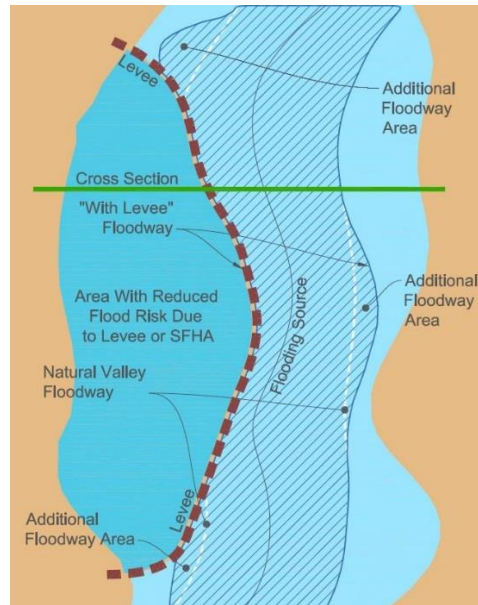


Figure 27: Final Regulatory Floodway

6.18.6. HYDRAULICALLY SIGNIFICANT LEVEES ON BOTH BANKS

When hydraulically significant levees exist on both banks, three scenarios could potentially result from the initial natural valley floodway analysis methodology outlined in Subsection 6.19.2.

- Both encroachment stations computed on the levees or on the riverside of the levees.
- One encroachment station is computed on the landside of the levee and the other is on or riverside of the levee.
- Both encroachment stations are computed on the landside of the levees.

6.18.7. BOTH ENCROACHMENT STATIONS COMPUTED ON LEVEE OR ON RIVERSIDE OF LEVEE

If the initial floodway analysis resulted in a floodway encroachment on the riverside of the levee on both sides (Figure 28), the floodway can be delineated at the computed location. However, if requested by the community, the floodway may be mapped at the landside toe of the levees.

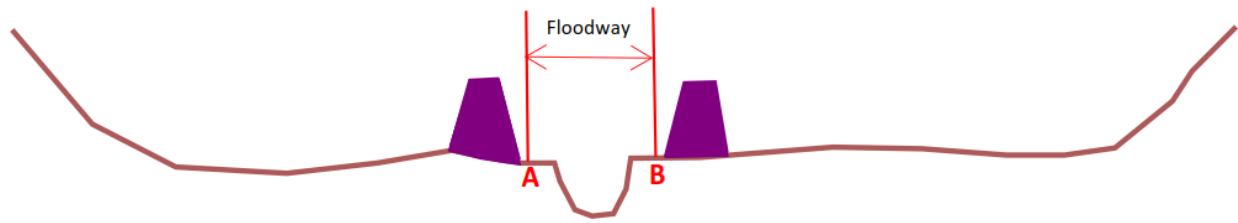


Figure 28: Both Encroachments (A and B) on Riverside of Levees

6.18.8. ONE ENCROACHMENT STATION IS ON LANDSIDE OF THE LEVEE AND THE OTHER IS ON THE LEVEE OR ON THE RIVERSIDE OF THE LEVEE

If the initial floodway analysis resulted in a floodway encroachment on the riverside of the levee on one side and on the landside of the levee on the other side, as shown by points A and B, respectively, in Figure 29 below, then an intermediate floodway analysis will be developed.

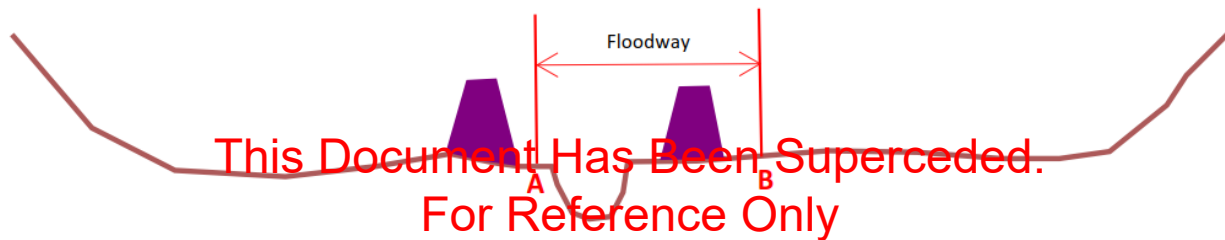


Figure 29: One Encroachment on Riverside of Levee (A) and the Other on Landside of Levee (B)

This is done by maintaining the location of the encroachment station A and shifting encroachment station B to the levee location as shown in Figure 30. The resulting regulatory floodway elevations are compared to the baseline model elevations to determine if the surcharges are within the allowable limit. If the surcharges are within the allowable limits, the floodway can be delineated at the location computed in this model. If requested by the community, the floodway on one or both sides may be mapped at the landside toe of the levee.

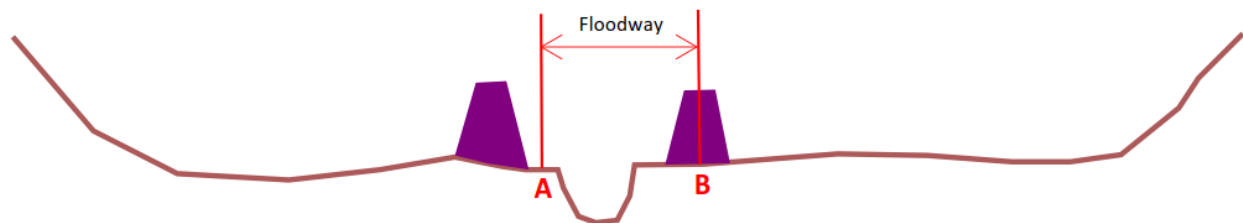


Figure 30: The Landside Encroachment (B) Moved to the Levee

If surcharge in the intermediate floodway model exceeded the maximum allowable, the regulatory floodway on side A is widened to bring the surcharge within the allowable limits, as shown in Figure 31. If the surcharge limit cannot be met by moving the encroachments to the levees, the surcharge can be reevaluated by comparing the results of the intermediate floodway analysis to the with-levee BFE. Situations may arise where it is not possible to bring the floodway surcharge within the allowable limit by widening the floodway and using the with-levee BFE for surcharge calculation. Coordination between community officials and FEMA is required to determine the most appropriate approach.

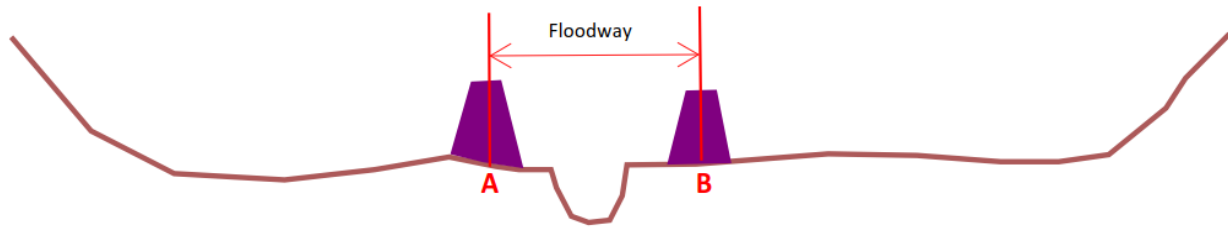


Figure 31: Both Encroachments at Levees

6.18.9. BOTH ENCROACHMENT STATIONS FALL ON LANDSIDE OF THE LEVEES

If the initial floodway analysis resulted in both floodway encroachments on the landside of the levees on both banks, as shown in Figure 32 below, then an intermediate floodway analysis will be developed. This is done by moving both encroachments to the levee (as shown in Figure 31) and comparing the floodway elevation to the baseline model elevations to determine if the surcharges are within the allowable limits. If they are within the allowable limits, then the floodway is mapped at the levees.

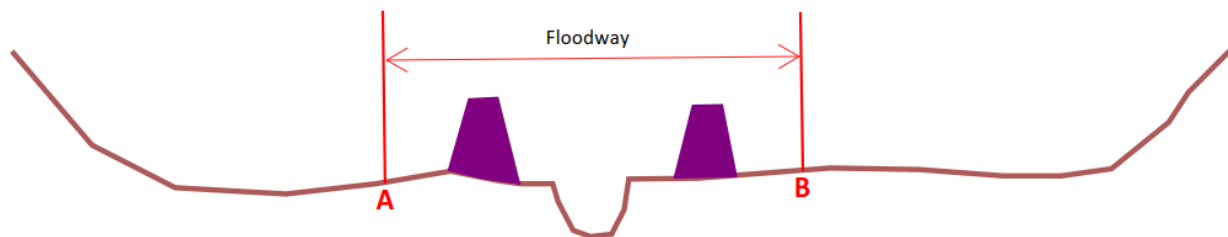


Figure 32: Both Encroachments Landward of the Levees

If surcharge in the intermediate floodway model exceeded the maximum allowable, the surcharge can be reevaluated by comparing the results of the intermediate floodway analysis to the with-levee BFE. If the surcharges are within allowable limit, the floodway can be mapped at the levees. If the surcharges exceed the allowable limit, coordination between community officials and FEMA is required to determine the most appropriate approach.

6.18.10. THE METHODOLOGY FOR DEVELOPMENT OF THE REGULATORY FLOODWAY

This subsection outlines the step-by-step process for determining the final floodway encroachment stations for hydraulically significant levees on both banks. Steps 5 and 6 apply only to non-accredited levees.

As mentioned in previous sections, the regulatory floodway is a community floodplain management tool, and the final approach to determining the regulatory floodway will be made in coordination between FEMA and the affected communities. The method below is a general guideline expected to be applicable for floodway identification in most levee situations. These steps should be applied in consideration of the model as a whole when adjusting encroachment stations.

1. Compute the WSEL with both levees holding to produce the with- levee BFE.
2. Compute the WSEL with the left levee holding (BFE riverside of right levee).
3. Compute the WSEL with the right levee holding (BFE riverside of left levee).
4. Perform the Natural Valley Procedure floodway analysis to determine encroachment stations A and B. (See Figure 33.)

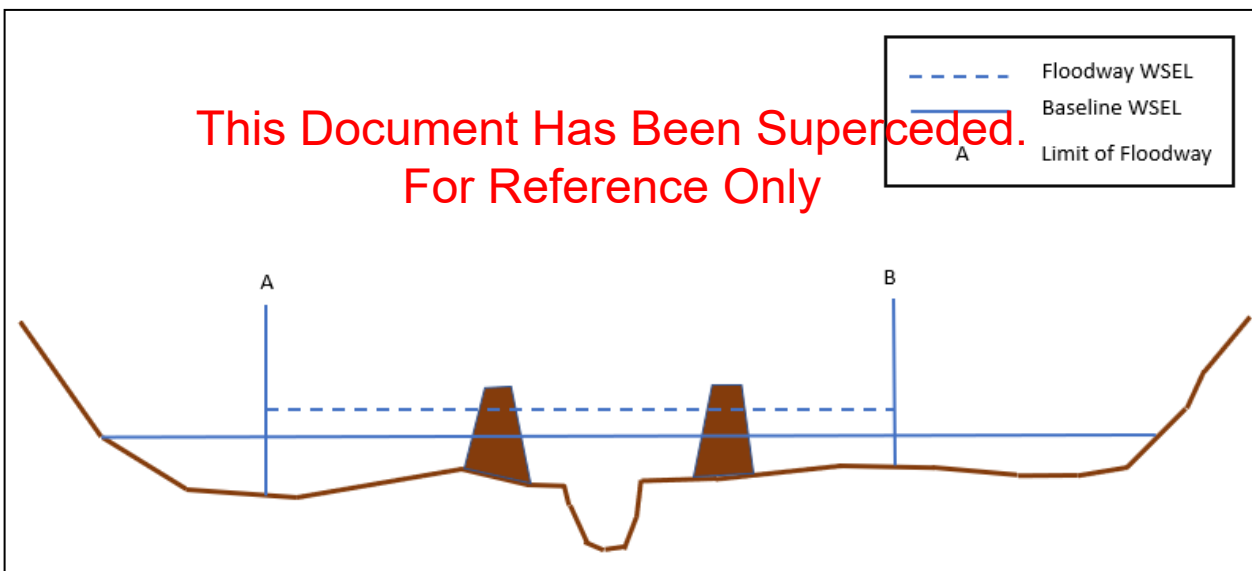


Figure 33: Use of Natural Valley Procedure to Determine Initial Encroachment Stations A and B

5. Run floodway analysis with the left levee holding to determine encroachment station C. Left encroachment station is set at the left levee. (See Figure 34.)

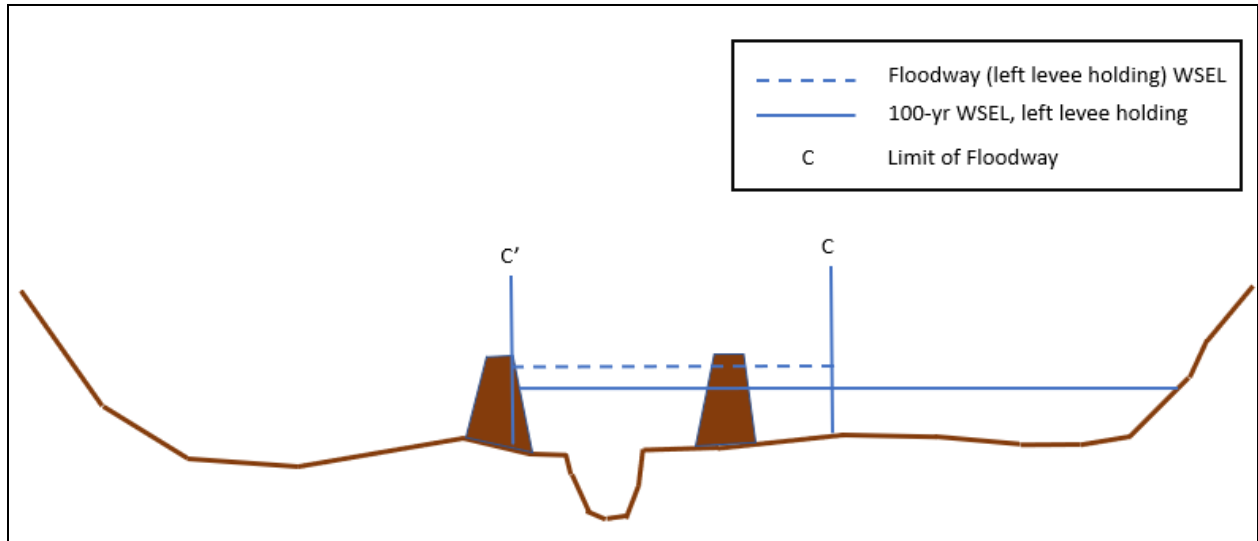


Figure 34: Using Left levee holding to find encroachment station C

6. Run floodway analysis with the right levee holding to determine encroachment station D. Right encroachment station is at the right levee. (See Figure 35.)

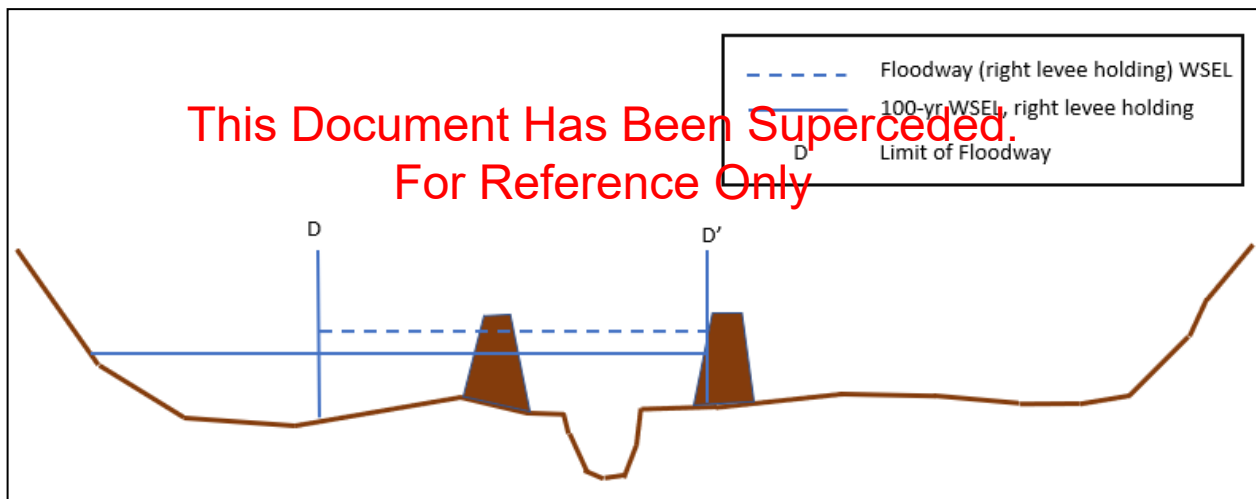


Figure 35: Right Levee Holding to Find Encroachment Station D

7. If both levee systems are accredited, start with A and B as initial locations as shown in Figure 33. If both levees are non-accredited, start with C and D as initial locations from encroachments computed in previous steps. (See Figure 36.) If the left levee is non-accredited and right levee is accredited, start with B and D as initial locations from encroachments computed in previous steps. (See Figure 37.) If the right levee is non-accredited and left levee system is accredited, start with A and C as initial locations from encroachments computed in previous steps. (See Figure 38.) Then follow the steps outlined below.

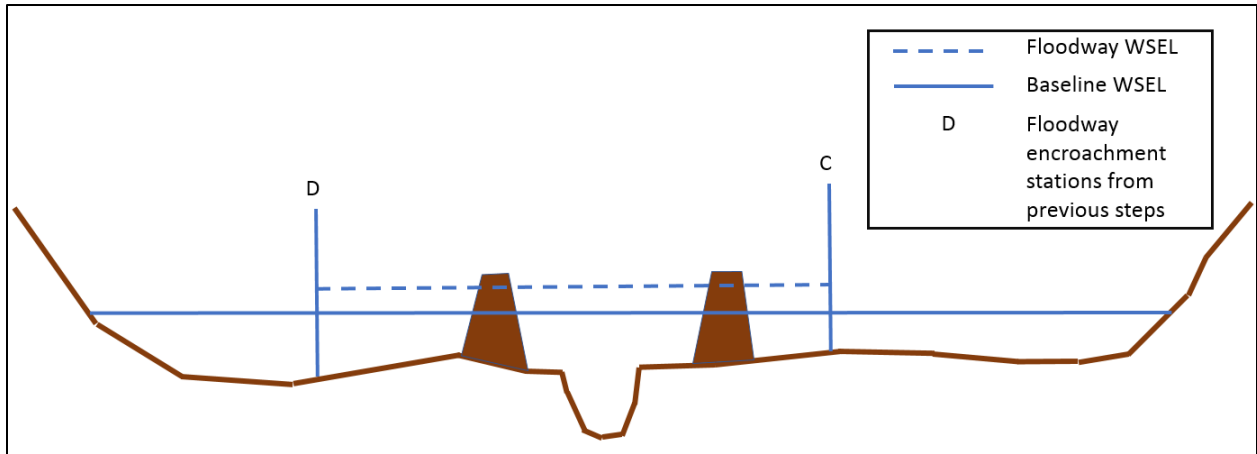


Figure 36: Both levees Are Non-accredited

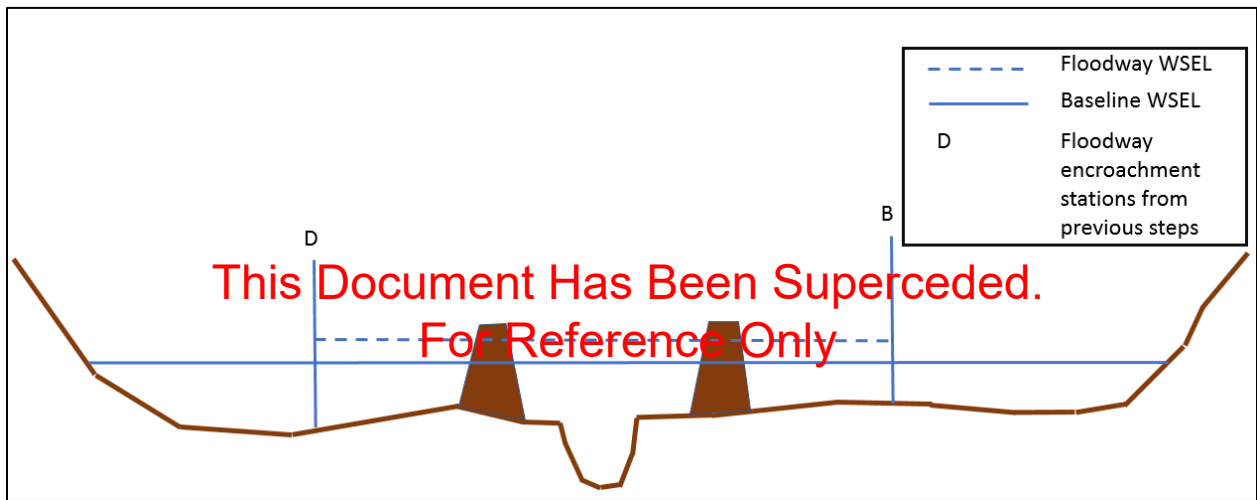


Figure 37: Left Levee Is Non-accredited, Right Levee Is Accredited

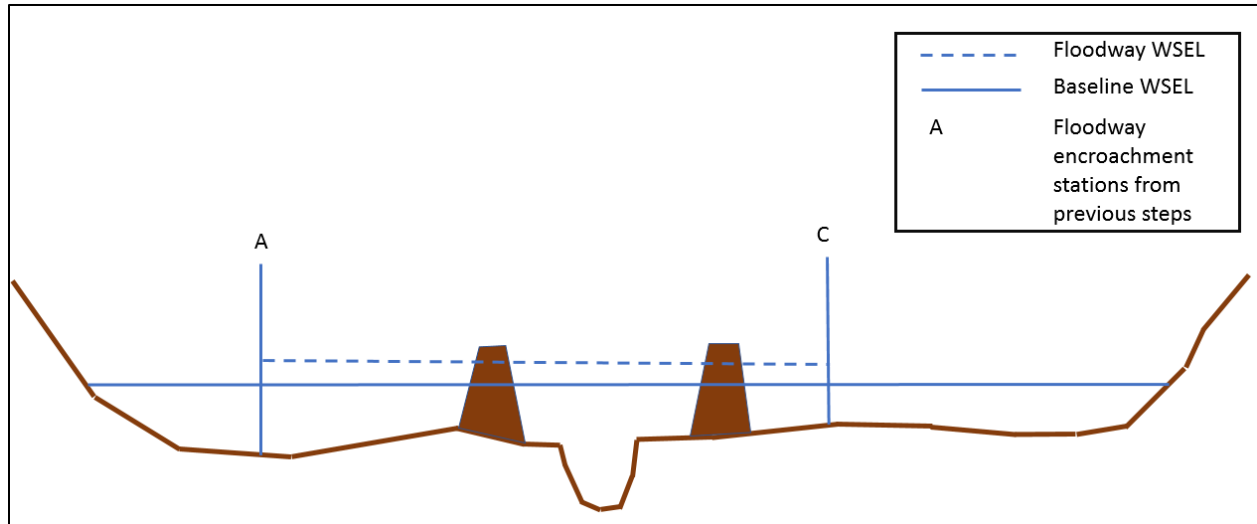


Figure 38: Right Levee Is Non-accredited, Left levee Is Accredited

- a. Start with initial encroachment stations from Step 7. Compute the surcharge for the floodway using the baseline WSEL. If the surcharges are within the maximum allowable limit, and both the left and the right encroachments are on the riverside of the levee, the floodway analysis is complete. The floodway is mapped on the riverside of the levee at the final computed location.
- b. If the surcharges are higher than the maximum allowable limit and the encroachments are on the riverside of the levee, move the encroachments to the levees (C' and D'). If the surcharge is within the allowable limits, the floodway analysis is complete. If the surcharge is still higher than the allowable limits, proceed to Step d.
- c. If both or either of the encroachments are on the landside of the levee, then move the landside encroachment(s) to the levee(s) (C' and/or D') and test if surcharge is within allowable limit using the baseline water-surface elevation. If it is within the allowable limit, the floodway analysis is complete. If the surcharge is higher than allowable, move the riverside encroachment to the levee (C' or D') where applicable, and test if the surcharge is within allowable limits. If it is, the floodway analysis is complete. If the surcharge is still higher than the allowable limits, proceed to Step d.
- d. If surcharges with encroachments set at the levees are higher than the allowable limit using the baseline WSEL, evaluate whether the allowable surcharge can be met by widening encroachments at the non-leveed cross sections. If the surcharge is still higher than the allowable limits, test the surcharge using the with-levee WSEL. If the surcharge is within allowable limits using the with-levee baseline, then the analysis is complete. If the surcharge is still higher than the allowable limits, proceed to Step e (for non-accredited levees) or Step f (for accredited levee systems).
- e. In the case of non-accredited levee systems, if the surcharge with encroachments set at the levees is higher than the limit using the with-levee baseline WSEL, encroachments C and D can

be moved to the landside of the levees until the allowable surcharge is achieved. If the allowable surcharge limits cannot be met by moving the encroachment outward or the affected communities do not want a floodway on the landside of the levee, coordination between the community and FEMA is required to identify the appropriate approach.

- f. In the case of accredited levee systems, if the surcharge with encroachments set at the levees is higher than the allowable limit using the with-levee baseline WSEL, typically encroachments A and B can be not moved to the landside of the levees. Adjust encroachments at adjacent non-leveed cross sections to achieve an allowable surcharge. If the allowable surcharge limits cannot be met by adjustment of encroachments at non-leveed sections, coordination between the community and FEMA is required to identify the appropriate approach.

6.19. Hydraulic Modeling on Landside of the Levee

This subsection presents recommended guidance to be used for the mapping of the landside flood hazard area for levee reaches that are evaluated using the Overtopping or Structural-Based Inundation Procedures. For these procedures, often an unsteady flow will be required. While Appendix C of FEMA's [Guidelines and Specifications for Flood Hazard Mapping Partners](#) (discusses both one- and two-dimensional unsteady-flow modeling, this subsection provides additional guidance specific to levees.

The flood hazard area created by levee overtopping or breach is assumed to be subject to the same annual-chance flooding as the exterior flooding source. For example, if a levee is breached by the base flood, the assigned Project Team member will delineate the area on the landside of the levee as an SFHA on the FIRM.

Hydrologic or hydraulic analyses are necessary to compute the flood elevations created by the inflow. Reservoir routing and pump operation will be the features generally applied to determine flood elevations for hydrologic analyses.

One-dimensional (1-D), two-dimensional (2-D) steady flow, and unsteady flow solution methods are the hydraulic analysis methodologies applicable to compute flood elevations. The applicability and data requirements for these methodologies are summarized below.

6.19.1. HYDROLOGIC FLOW ROUTING

Hydrologic flow routing is applicable when floodplain storage, not conveyance, is the dominant factor determining the flood elevation. This will generally be applicable if the inflow is for a limited duration and the interior floodplain has the capability to store the volume of flow entering the impacted area. A stage-inflow hydrograph of the exterior flooding source is essential to determine the duration and rate of the inflow, and to conduct a hydrologic flow routing. Depending on the mode of failure, the assigned Project Team member can compute inflow hydrographs by applying appropriate hydraulic computations. Most hydrologic flow routing models also have the capability to reflect flow evacuation features, such as pumping stations.

6.19.2. HYDRAULIC MODELING

A hydraulic approach is applicable when an alternate flow path is created on the landside of the levee for floodwater to flow downstream. Conveyance and floodplain storage along the flow path are the dominant factors controlling the flood elevations. For general floodplain analyses based on the formulation of basic equations of motion, four types of solutions procedures are available. They are categorized as 1-D steady flow, 1-D unsteady flow, 2-D steady flow, and 2-D unsteady flow solutions. Where groundwater is close to ground level, it may be appropriate for the assigned Project Team member to account for groundwater interaction.

The Project Team can select any hydraulic analysis software accepted by FEMA for flood hazard area development for hydraulic modeling. General data requirements and applicability of the different types of hydraulic flow modeling are provided in Subsections 6.20.3 through 6.20.6.

6.19.3. ONE-DIMENSIONAL STEADY FLOW ANALYSIS

One-dimensional steady flow analyses are applicable where flow is limited to defined flow paths. Inflow would be peak flow rates generated from the subject levee failure conditions – overtopping, segment failure, dynamic breach, or final breach condition. Weir and split flows are two commonly used options.

Inflow discharges due to overtopping can be computed by applying lateral weir flow computations. For weir flow assumptions to be applicable, the flow crossing the crest profile of the levee or flood wall must not be submerged on the landside of the levee. The weir flow method is also applicable if the final breach geometry creates weir-flow conditions.

When overtopping flow accumulated on the floodplain creates a fully submerged condition on the landside of the levee, split flow becomes applicable. When a breached levee fails to the natural ground level, inflow may be computed as split-flow conditions in the vicinity of the breach location. The breach or overtopping flow may return to the same river downstream, join another flooding source, or flow into a large water body whose WSEL will not noticeably change despite receiving the inflow from levee failure. In addition, most steady flow analyses can also reflect constant pumping rates.

One-dimensional steady flow models are generally not applicable in coastal situations.

6.19.4. ONE-DIMENSIONAL UNSTEADY FLOW ANALYSIS

Unsteady flow analyses are most suitable if the flow is limited to defined flow paths and defined storage areas are present in the overbank. However, unsteady flow models using link-node concepts to represent flow have the capability to model a larger number of flow paths and offline floodplain storage. Unsteady flow analyses have the capability to simulate online floodplain storage and dynamic impacts of pumping activities.

Unsteady flow analyses can be applied to a variety of downstream boundary conditions. Flow may rejoin the same river downstream, at other flooding sources, travel to storage/ponding areas, or reach an ocean impacted by daily tide level variations.

Unsteady 1-D numerical models also may be applied to model the hydraulics for coastal levee overtopping and breach scenarios. In selecting an appropriate model, consideration is to be given to models that include modules for incorporating flow-control structures and supercritical flow.

Models developed with modules accounting for dam-break scenarios may also be applied to levee breach scenarios. Models that are applicable to coastal flooding sources and include wave overtopping also exist and can be used.

6.19.5. TWO-DIMENSIONAL FLOW ANALYSIS

Two-dimensional flow routing is most applicable to natural floodplains with flat terrain or urban floodplains where flow directions are dictated by streets, storm drain alignments, and obstructions caused by buildings. When levee breach or overtopping occurs, inflow from the channel may be modeled as 1-D flow near the breach and develop into 2-D flow, either forming flow paths or remaining as sheet flow to spread over the floodplain. A typical 2-D model can model levee, flow paths, street flow, or shallow flow conditions.

Generally, 2-D models have the capability to provide unsteady flow solutions. A hydrograph and can be generated outside of the 2-D model and provided as input. Inflow hydrographs can be computed using methodologies described for 1-D unsteady flow analysis. Some 2-D software accepted for flood study development can also model levee overtopping, piping, and slope stability failure as well as flow routing on the adjoining floodplain.

Two-dimensional analyses provide a convenient method to simulate multiple modes of failure at different locations without significant additional effort. Two-dimensional analysis is also applicable to simulate flood ponding in areas between two levees or areas impacted by ring levees. When a breach occurs in one of the levees, areas between two levees will be inundated until the ponding elevation reaches the equivalent elevation of the flooding source side or overtops the other levee. In the latter situation, the ponding elevation is to be mapped as the elevation of levee being overtopped. Pumping and other flood-mitigating features may be reflected in most 2-D models through rating curves.

The storm surge modeling system most prevalently used in coastal flood hazard studies includes the ADCIRC 2-D circulation model, which is then coupled with a 2-D wave model (STWAVE or UnSWAN). A 2-D model will have varying levels of complexity. A simple 2-D model using terrain data may be easily produced. In comparison, a complex 2-D model that includes detailed hydraulic structures and streets may be time-consuming to prepare.

6.19.6. COMBINATION OF ONE-DIMENSIONAL AND TWO-DIMENSIONAL MODELS

Increasingly, 1-D unsteady flow and 2-D software developers have provided the capability to link 1-D and 2-D solutions as needed. Users have the capability to use the appropriate solutions for appropriate locations. Some such models also have options to model the levee breach process. The channel flow is typically modeled as 1-D, using cross sections. Landside flow from a levee breach or overtopping is routed using 2-D grids or finite element mesh.

The selected analysis methodology should be able to reflect flow conditions adequately and develop reliable flood elevations and flood hazard area boundaries for the area landward of a levee that does not meet the 44 CFR 65.10 criteria. Decision factors include the consequences of levee failure, nature of the terrain, complexity of the levee systems, mode of failure mechanisms, data availability, and availability of funds.

6.20. Flood Hazard Mapping

6.20.1. MAPPING PROCESS

In the event that a stakeholder disagrees with the final analysis and mapping procedures used to create the FIRM, the current FEMA appeals, and Scientific Resolution Panel procedures may be used. These procedures are documented in FEMA Guidance Document No. 26, Guidance for Flood Risk Analysis and Mapping: Appeal and Comment Processing. The guidance document is accessible from the FEMA Guidelines and Standards for Flood Risk Analysis and Mapping webpage.

**This Document Has Been Superseded
For Reference Only**

The final mapped flood hazard boundaries landward of non-accredited levee systems will be a worst-case combination of three main sources:

1. The composite SFHA resulting from the levee reaches evaluated by the Overtopping, Structural-Based Inundation, or Natural Valley Procedures for each levee reach. Sound and Freeboard Deficient levee reaches will not have an SFHA associated with the individual reach analysis.
2. The SFHA resulting from the interior drainage analysis.
3. The area developed using the Natural Valley Procedure, which will be used to depict the potential base flood hazard that exists landward of a non-accredited levee system in areas where an SFHA has not been identified. This Zone D will be shaded on the FIRM differently than a typical Zone D to clarify the difference in how the two zones are developed.

This concept is illustrated in Figure 39. If BFEs are to be shown on the FIRM, they will be based on the highest elevation of the composite mapping.

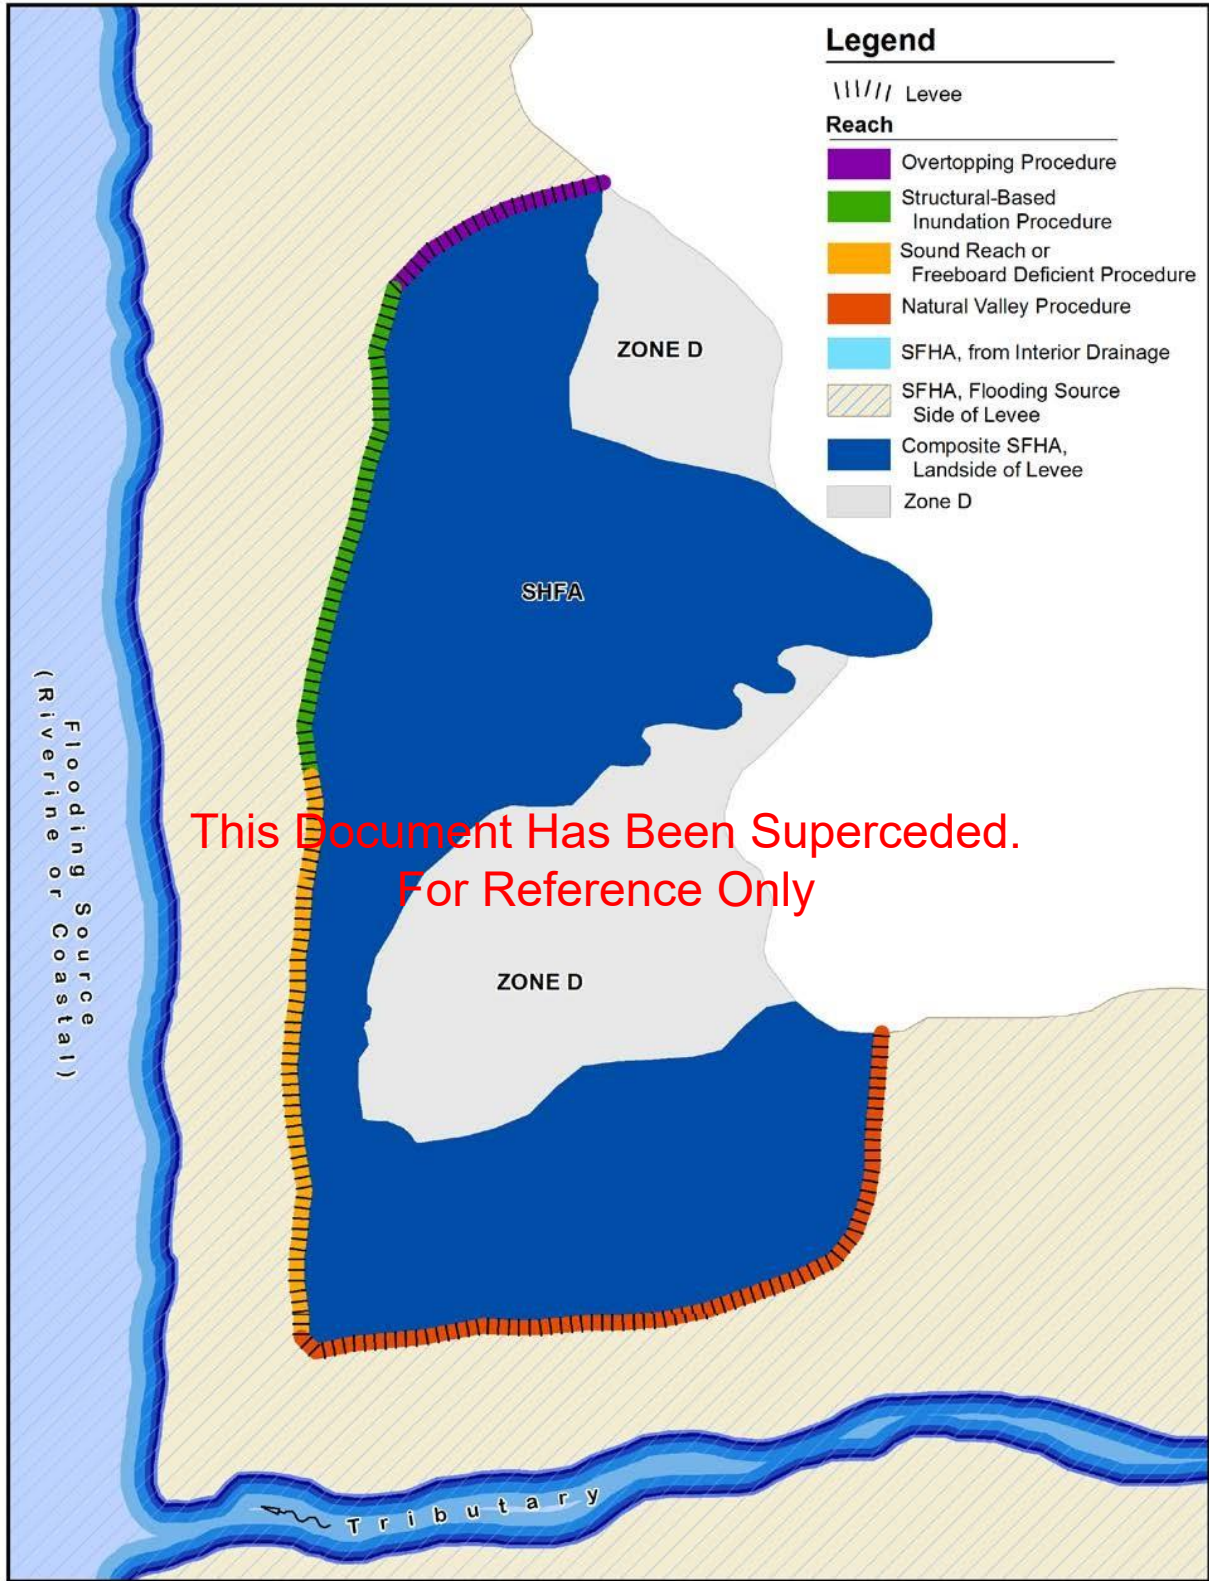


Figure 39: Composite Mapping of Flood Hazards for the Levee System

When the Structural-Based Inundation Procedure is used, the SFHA for that levee reach will be a composite of each independently analyzed breach location. The resulting floodplain from the analysis of a Structural-Based Inundation reach must reflect the fact that a breach could occur at any location along the reach. To achieve this, it may be acceptable for the assigned Project Team member to extrapolate breach analysis results to areas that were not analyzed separately. This will most often occur in situations where breach flows seek a flow path or storage area that is not directly adjacent to the levee. The final mapping will not reflect the analyzed breach locations, however; the final mapping will reflect the composite flood hazards resulting from all breach analyses conducted.

The input data requirements to map BFEs on the FIRM for the Overtopping and Structural-Based Inundation Procedures follow FEMA Guidance Document 31, [Guidance for Flood Risk Analysis and Mapping: Mapping Base Flood Elevations on Flood Insurance Maps](#). The guidance document is accessible from the FEMA Guidelines and Standards for Flood Risk Analysis and Mapping webpage.

For non-accredited levee systems, the levee embankment will be shown as within the SFHA on the riverward side of the levee centerline even though it is topographically higher than the BFE. The results of the “with levee” hydraulic analysis are used to map the BFEs riverward of the levee centerline. The area landward of the levee centerline will be mapped as non-accredited using the appropriate analysis and mapping approach. For example, the water-surface elevations from the “natural valley” hydraulic analysis and will be mapped on the best available topography landward of the levee centerline and a zone break will be placed at the centerline of the levee. At no time should an unshaded Zone X occur along the levee embankment. If the floodway is designated at the landside toe of the levee, the zone break will be placed at the floodway boundary to distinguish the two zones and create the break in the BFE. Any flooding sources and interior drainage flooding that fall within the levee impacted area will be mapped as an SFHA.

This Document Has Been Superseded
For Reference Only

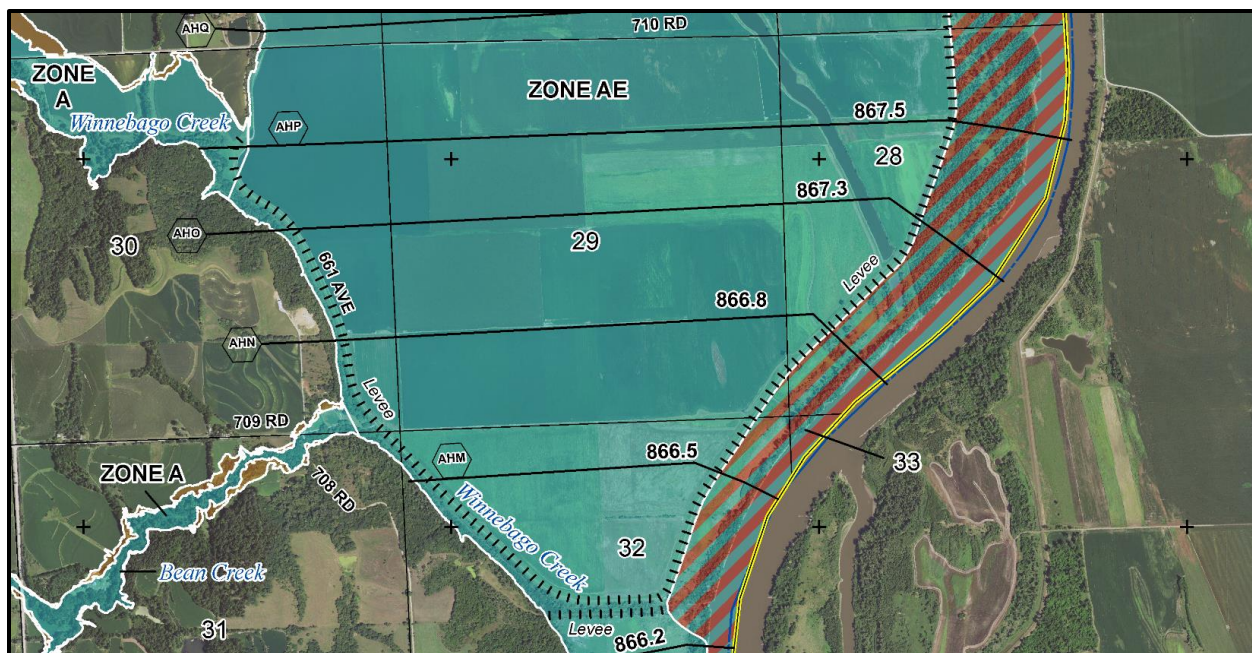


Figure 40: Flood Hazard Mapping for Non-Accredited Levee System

6.20.2. FLOOD INSURANCE IMPLICATION OF ZONE D MAPPING

The NFIP defines Zone D as an area of possible, but undetermined, flood hazards. Historically, FEMA has used the Zone D designation in areas where a flood hazard analysis has not been completed.

**This Document Has Been Superseded.
For Reference Only**

When analyzing and mapping areas landward of non-accredited levee systems, FEMA will use Zone D to designate the possible 1% annual-chance flood inundation on FIRMs. Zone D will supplement the SFHAs developed through the procedure(s) applied to individual levee reaches. The size and location of the Zone D areas will vary and be based on the results of the composite SFHA analysis that results from the Natural Valley Procedure. The natural valley analysis is hydraulically modeled for riverine levee reaches by retaining the topographic features of the levee in the model but allowing the discharge to flow on either side of the levee, assuming that the levee does not impede conveyance.

Flood insurance is available in Zone D; however, properties located in Zone D areas are not subject to the federally mandated flood insurance purchase requirement. Lenders may, however, require insurance coverage for properties located landward of levee systems regardless of the zone designation, as a condition of a loan, as part of their regular lending practices.

6.20.3. FLOODPLAIN MANAGEMENT IMPLICATIONS OF ZONE D MAPPING

FEMA views the analysis of the non-accredited levee systems as an intermediate step in the possible process leading to full levee accreditation. Because Zone D is not considered an SFHA, SFHA regulations do not apply. Floodplain management requirements are applied at the discretion of local officials as long as the community complies with the minimum standards of the NFIP regulations cited at 44 CFR 60.3(a).

FEMA will depict the Zone D area landward of the levee system on the FIRM with a different symbology than the traditional Zone D area. The differentiation between Zone D types will allow various stakeholders to identify Zone D areas landward of the levee system for use in determining flood insurance requirements, enforcing floodplain management and mitigation, and communicating risk.

If the community chooses to enforce elevation requirements in Zone D areas landward of the levee for new construction, local officials could require development to take place at a set height above grade, taking an approach similar to floodplain management in an SFHA with established BFEs. If requested, tools that FEMA would make available to communities to aid in the enforcement of elevation requirements include flood depth grids and WSELs derived from the Zone D natural valley analysis. These tools would provide flood depths and elevations to which a community could regulate new construction. The data could be provided to the community upon completion of the non-accredited levee analysis.

6.20.4. GUIDANCE REGARDING FIRM GRAPHIC AND DATABASE STANDARDS

This subsection presents guidance on how to depict flood hazard information associated with non-accredited flood-control structures. The Zone D flood hazard zone designation, with a zone subtype defined as “Area with Undetermined Flood Hazard Due to Non-Accredited Levee System” should be used for the Zone D flood hazard area on the landward side of the non-accredited levee. For FIRMs developed using the current standards, the Project Team will apply the detailed specifications summarized in FEMA [FIRM Panel Technical Reference](#).

**This Document Has Been Superseded.
For Reference Only**

In addition, FIRMs prepared under these graphical specifications will include the following note inside the map body. The note should be placed in the proximity of the subject levee feature(s).

Note: This panel contains levees that have not been accredited and are therefore not shown as reducing the hazard from the base flood.

The modeling results for the natural valley analysis should also be stored in the regulatory FIRM database. The community can use the natural valley cross-section GIS data to assist in elevation determinations for the purpose of map amendments and revisions. Therefore, the modeling cross sections from the natural valley analysis must be included in the regulatory FIRM database S_XS feature class. As described in the FEMA [FIRM Database Technical Reference](#), all cross sections used in the development of the effective hydraulic models shall be stored in the S_XS table, regardless of flood hazard zone depiction on the effective panel. The Zone D cross sections are provided as backup data, as such they shall be assigned a XS_LN_TYP field value of “NOT LETTERED, NOT MAPPED”. The Zone D cross sections must be assigned an appropriate model identifier in the MODEL_ID field of the S_XS table, as well as an appropriate source citation in the SOURCE_CIT field, to provide a link between the natural valley model and the spatial data. In addition, the S_XS table must link to data in the L_XS_ELEV table. The L_XS_ELEV table is designed to store cross section information for all event types and levee scenarios. For more information about populating the S_XS and L_XS_ELEV tables see the [FIRM Database Technical Reference](#).

The Technical References cited above are accessible from the FEMA Technical References webpage (<https://www.fema.gov/media-library/assets/documents/34519>).

6.21. Guidance Regarding Flood Insurance Study Report Standards

This subsection includes guidance on how to capture flood hazard information associated with a non-accredited flood-control structure in the Flood Insurance Study report.

6.21.1. TEXT

For flood hazard mapping projects performed using the current standards, the assigned Project Team member will need to add information to Table 5: Summary of Hydrologic and Hydraulic Analyses. The flooding source should be identified as <Streamname> (Landside of Levee Reach #) and extents should correspond to the extents of the levee reach. The methodology used to determine the Zone D area should also be included in the table. An example of this table with appropriate information included is provided in Table 5 below.

The Technical References cited above are accessible from the FEMA Technical References webpage (<https://www.fema.gov/media-library/assets/documents/34519>).

Table 5: Sample Summary of Hydrologic and Hydraulic Analyses Table Guidance Clarification Routing

This Document Has Been Superseded.
For Reference Only

Flooding Source	Study Limits		Hydrologic Model or Method Used	Hydraulic Model or Method Used	Date Analyses Completed	Flood Zone on FIRM	Special Considerations
	Downstream Limit	Upstream Limit					
Culvert Creek (Landside of Levee Reach 1)	Confluence with South Fork Inundation River	1.3 miles upstream of confluence of Ripple Creek	Scaled Stream Gage Hydrograph	FLO-2D v. 2009.06	3/31//2012	AE	Modeling using the Structural-Based Inundation Procedure
Culvert Creek (Landside of Levee)	1.3 miles upstream of confluence of Ripple Creek	0.5 miles upstream of confluence of Ripple Creek	Scaled Stream Gage Hydrograph	HEC- RAS 4.0	3/31//2012	AE	Modeling using the Natural Valley Procedure
Culvert Creek (Landside of Levee)	Confluence with South Fork Inundation River	0.5 miles upstream of confluence of Ripple Creek	Log Pearson Type III Frequency Analysis	HEC- RAS 4.0	3/31//2012	D	Modeling using the Natural Valley Procedure

Additional text is needed in Section 4.4 of the FIS when the Freeboard Deficient approach is used, and when Zone D is used. When Freeboard Deficient approach is used, the Project Team shall include the following text:

“Please note that the **Levee System Name** meets the structural standards of 44 CFR 65.10 except lacking adequate freeboard. The flood hazard area landward for the levee system is mapped as Zone D per the freeboard deficient approach under FEMA’s analysis and mapping procedures for non-accredited levee systems. The Zone D flood hazard area was determined based on a natural valley analysis of the **Flooding Source Name**.”

When Zone D from an analysis and mapping procedure is used, the Project Team shall include the following text:

In Zone D areas, floodplain management requirements are applied at the discretion of local officials as long as the community complies with the minimum standards of the National Flood Insurance Program (NFIP) regulations cited at 44 CFR 60.3(a). FEMA will depict the Zone D area landward of the levee system on the FIRM with a different symbology than the traditional Zone D area. The differentiation between Zone D symbology will allow various stakeholders to identify Zone D areas landward of the levee system for use in determining flood insurance requirements, enforcing floodplain management and mitigation, and communicating risk. For additional information regarding floodplain management requirements within Zone D areas, please consult with the local floodplain administrator for these communities. There is water surface elevation information available for these Zone D areas for communities’ use, as referenced in the Zone D Fact Sheet:

- Understanding Zone D for Levees: “Areas of Undetermined Flood Hazards”
https://www.fema.gov/sites/default/files/2020-08/fema_understanding-zone-D-levees.pdf

6.21.2. FLOODWAY DATA TABLE

The Floodway Data Table will show the elevations and surcharges based on the With Levee run. However, if applicable, the Floodway Data Table also will include the following footnote to alert future users that may modify the regulatory floodway:

The floodway limits on the non-leveed side of the flooding source are determined from the Natural Valley analysis.

6.22. Documentation

For levee reaches analyzed and mapped using the Structural-Based Inundation Procedure, the Project Team will document levee breach location, parameters, and description of the methods used to determine this data. The Project Team also will document any historic breach data or other data used to support various procedures and decisions that were available.

The Project Team is to include documentation, such as reports submitted to satisfy the standards of 44 CFR 65.10, except for survey data for each reach, in the General Folder of the Hydraulics Data Capture Standards submission. See the [FEMA Data Capture Technical Reference](#) for more information on levee documentation in the Hydraulics task.

6.23. Review Procedures

FEMA Regional Offices may determine that the review for mapping non-accredited levees should be conducted through the regional support staff of FEMA's Risk MAP providers. Decisions made during the process should be coordinated with the entity performing the independent Quality Assurance/Quality Control (QA/QC) review.

Submittals must include backup data and supporting information for all calculations, in case a more detailed review is required. A more detailed review must be coordinated with FEMA Headquarters.

The Project Team independent QA/QC reviewer will verify that all components use the same flooding elevations and conditions, and that the entire levee system (if a system consists of different segments) is considered in the submittal.

6.23.1. REVIEWING DATA REQUIRED TO APPLY DIFFERENT PROCEDURES

FEMA will review the submittal in accordance with Chapter 4 of this document. Due to the complexity and uniqueness of each coastal levee, the FEMA Project Officer or designee will coordinate and consult with FEMA Headquarters for all levees affected by coastal forces.

To verify that a submittal meets the overtopping analysis standard, the Project Team member assigned to perform an independent QA/QC review will verify that the submission includes documentation supporting two main items.

1. The documentation shows that no appreciable erosion of the levee crest, toe, embankment, or foundation occurs during the overtopping of the base flood event because of currents or waves.
2. The documentation indicates that the anticipated erosion will not result in structural failure (i.e., breach of the levee, directly or indirectly, through loss of embankment material due to erosive forces or the reduction of the seepage path or piping and subsequent instability).

The Project Team member assigned to perform the independent QA/QC review will verify that the submission includes a discussion of the items to consider as discussed in this guidance document and why they may or may not apply.

6.23.2. REVIEWING MODELING AND MAPPING FOR NON-ACCREDITED LEVEES

All hydraulic analyses, hydrologic analyses, and floodplain mapping submitted performed by the Project Team will be reviewed to verify that they satisfy FEMA standards. All data and documentation submitted to satisfy the standards of 44 CFR 65.10 will be reviewed per the criteria in Chapter 4.

For reaches modeled using the Structural-based Inundation Procedure, the Project Team member assigned to perform the independent QA/QC review will focus on verifying the following:

- The resulting SFHA does not indicate where individual breaches were located.
- The analysis reflects that the levee reach could breach at any location within the reach.
- How the submitter determined that additional breach locations were not required is documented.
- The breach parameters chosen fall within the historic ranges for the size, location, flooding source type, and soil type of the levee.
- The resulting SFHA reasonably reflects the composite results of all breach analyses.

7. Non-Levee Reaches and Non-Levee Features

Physical manmade features that were not designed and constructed as levees may exist near or within flood-prone areas, and these features may impact the conveyance of floodwaters. Levee systems may tie into these manmade features, whose existence and performance are necessary for excluding floodwaters from the levee-impacted area. In this case, these features are referred to as “non-levee reaches” in this document. Alternately, these features may exist independent of a levee system, but still may inadvertently impact floodwater conveyance; those features are referred to as “non-levee features” in this guidance document.

**This Document Has Been Superseded
For Reference Only**

In either case, these features may be represented on effective FIRMs as reducing flood hazards and must be reconsidered when a new Flood Risk Project is initiated so that FEMA appropriately analyzes and maps the flood hazards that may be impacted by these features. For non-levee reaches that are part of or tie into a levee system for which the levee owner is seeking accreditation, the owner must provide documentation and certified data to FEMA demonstrating that the entire levee system meets the requirements of 44 CFR 65.10. If this requirement cannot be met, FEMA will analyze the levee system and map the levee-impacted area in accordance with FEMA’s levee analysis and mapping procedures for non-accredited levee systems (refer to Chapter 6 of this document). To demonstrate that a non-levee feature impacts the conveyance of floodwaters, detailed data and engineering analyses must be provided to FEMA and certified by a registered P.E. in accordance with sound engineering practice. If an entity seeks accreditation for a non-levee feature, that entity must demonstrate that the feature meets the requirements of 44 CFR 65.10.

Previous FEMA mapping procedure documents (including Procedure Memorandum No. 51, dated February 27, 2009, which has been superseded by this document) used the term “non-levee embankments” to describe some of these types of features. Although this term is not used in this document, roadway and railroad embankments are examples of physical manmade features that are not typically designed and constructed to function as a levee system or other flood-control structure. However, these features may inadvertently represent flood hazard reduction or other impacts to the

conveyance of floodwaters on current effective FIRMs, and as such, may indicate a lesser flood hazard and corresponding risk than what may actually exist in areas near these structures. Thus, it is important to understand the impact each feature may have on the flooding source to appropriately analyze and map the corresponding flood hazard in these areas.

It should also be noted that FHWA issued a memorandum on September 10, 2008, titled Highway Embankments versus Levees, and other Flood Control Structures, to their field offices and State Departments of Transportation (DOTs), emphasizing that most highway embankments are not designed and constructed to perform as a levee system or other flood-control structure. This memorandum also highlighted the distinctions between highway embankments, levee systems, and other flood-control structures; clarified the FHWA role with respect to flood control; and acknowledged that communities may have incorrectly assumed that these structures provide some level of flood hazard reduction.

This chapter provides clarity on the appropriate classification and subsequent data considerations, analysis, and mapping requirements for physical manmade features that are not designed and constructed as levee systems. In addition, guidance is provided that emphasizes the importance of coordination with communities to understand the location and impacts of these features to appropriately analyze and map the flood hazards in these areas.

7.1. Non-Levee Reach

**This Document Has Been Superseded.
For Reference Only**

Non-levee reaches are considered a form of manmade high ground that a levee system ties into and whose existence and performance is necessary for excluding floodwaters from the levee-impacted area. USACE also refers to these types of structures as “non-project segments.” To demonstrate that non-levee reaches meet the requirements of 44 CFR 65.10, they must be evaluated based on their current condition to determine eligibility for accreditation of the entire levee system of which they are a part. Coordination with communities and the owners of the non-levee reaches is essential to identify these features, appropriately analyze and map the flood hazards associated with these non-levee reaches, and to provide communities with information and tools to help them communicate flood risk and mitigation opportunities in these areas. Figure 41 provides an example of a non-levee reach.

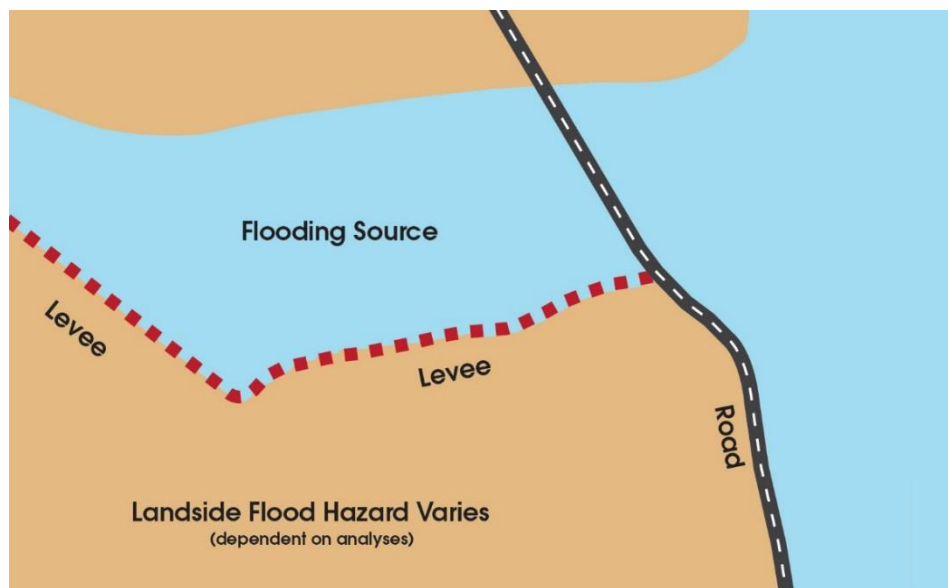


Figure 41: Non-Levee Reach

7.2. Non-Levee Features

A non-levee feature is considered a physical feature that is not designed, constructed, operated, or maintained as a flood-control structure, but may inadvertently confine flow during some flood events. These features may encroach on the floodplain but are not connected to any existing levee system and do not meet the definition of a levee system. They may include roadway and railroad embankments, canals, berms, retaining walls, seawalls, and other features, which involve placing fill or other material within flood-prone areas and which may impact the conveyance of floodwaters in these areas.

These features carry an inherent risk and may have inadvertently been represented as providing flood hazard reduction on a FIRM. Therefore, it is important to fully understand the impact of these features to identify the appropriate flood hazards in these areas. Coordination with communities and the owners of these non-levee features, when applicable, is essential to identify, analyze, and map the flood hazards associated with these non-levee features, and to provide communities with information and tools to help them communicate flood risk and mitigation opportunities in these areas. Figure 42 provides an example of a non-levee feature.

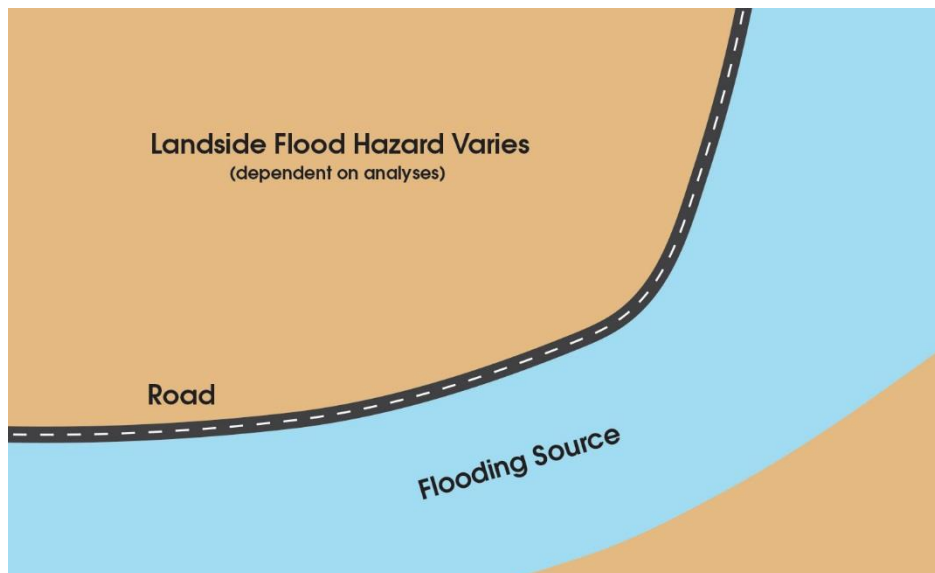


Figure 42: Non-Levee Feature

The flood hazard on the landside of most non-levee features will be analyzed and mapped as not providing base flood hazard reduction. If an entity seeks accreditation for a non-levee feature, that entity must demonstrate that the feature meets the requirements of 44 CFR 65.10. To demonstrate that a non-levee feature impacts the conveyance of floodwaters, detailed data and engineering analyses must be provided to FEMA and certified by a registered P.E. in accordance with sound engineering practice.

**This Document Has Been Superseded.
For Reference Only**

FEMA has developed a document titled “Applied Approaches to Non-Levee Features” that includes example cases and scenarios encountered during a flood risk project. The document is available on FEMA RMD SharePoint to all authorized users. Individuals should coordinate with the FEMA Regional Office or FEMA Headquarters to discuss flood hazard analysis and mapping requirements that may be appropriate for particular non-levee features.

7.3. Communication of Risk

To appropriately analyze and map the flood hazards in impacted areas, FEMA will coordinate with communities during the Discovery Phase of a Flood Risk Project, and throughout the project lifecycle as necessary, to understand the location and impacts of non-levee reaches and non-levee features. Where physical manmade features that were not designed and constructed as levee systems exist near or within flood-prone areas, the impact of these features on the conveyance of floodwaters may change over time. The current effective FIRMs may inadvertently represent these features as providing flood hazard reduction or other impacts to the conveyance of floodwaters, and as such, may indicate a lesser flood hazard and corresponding risk than what may actually exist in areas near these structures.

Communities and property owners may not be fully aware of the risk associated with these non-levee features. Therefore, coordination with local stakeholders is essential to identify, analyze, and map

the flood hazards associated with these non-levee features to provide relevant information and tools to help them understand their flood risk and mitigation opportunities in these areas.

8. FEMA and Other Federal Agency Coordination

OFAs may have a role in working with FEMA to develop levee-related policy, identify flood risk, conduct mitigation, and outreach activities, or provide data to inform the FEMA flood hazard mapping program for areas impacted by levees.

8.1. USACE

Though FEMA and USACE have different roles and responsibilities related to levee systems, both agencies have complementary objectives related to reducing risk to life and property and communicating flood hazards and risks. FEMA has information and data to supplement USACE Levee Safety Program activities. Conversely, information from USACE Levee Safety Program activities will supplement FEMA activities. Jointly, FEMA and USACE will align activities, information, and messaging related to levee systems to improve public awareness of flood risk. Main areas of engagement between the USACE Levee Safety Program and FEMA flood hazard identification activities are further described below.

- **Leveraging Data:** Both USACE and FEMA perform activities using best available information to include, but not limited to, mapping, hydrologic, hydraulic, and coastal modeling, and infrastructure condition. Early coordination of both USACE Levee Safety Program and FEMA activities will result in finding opportunities to share and leverage information that will benefit both agencies. Both agencies will use the NLD as the main database of information for both the NFIP and USACE Levee Safety Program.
- **Mapping Levee-Related Flood Hazards for the NFIP:** Communities or parties seeking recognition of a levee system as reducing the base flood hazard on FIRMs, also referred to as levee accreditation, must provide data and documentation in accordance with 44 CFR 65.10. USACE and FEMA have agreed to specific cases when information collected by USACE through their Levee Safety Program will inform some or all requirements for levee accreditation, and that is further specified in Chapter 4 of this document. In cases when information collected by USACE informs some of the requirements for levee accreditation, the communities or parties seeking accreditation will have to provide information to fulfill the remaining requirements. Because some of the USACE Levee Safety Program activities are conducted on a levee segment basis, caution should be taken to ensure information is used, presented, and considered collectively on a levee system basis when using USACE information to inform a levee accreditation decision. Examples of USACE information include inspections and risk assessments.
- **Risk Communication:** Both USACE and FEMA have the objective to increase public awareness as related to flood risk. In areas with levee systems, USACE typically engages directly with levee sponsors and FEMA engages directly with community officials. Coordination of these relationships helps improve public awareness and effective risk communication. USACE and

FEMA will coordinate to ensure consistent messages related to risk, levee condition, and mapping/modeling efforts. One example is the importance for FEMA to verify and maintain NFIP-related information in the NLD and ensure that information is accurate and includes the appropriate messaging for levee sponsors and communities.

- **Engagement Processes:** FEMA will develop engagement processes with the appropriate USACE District and Division offices and will identify processes to ensure information is exchanged in the most efficient, beneficial, and meaningful way possible. Engagement processes should include cross-walking FEMA mapping efforts with USACE Levee Safety Program activities and planning for joint engagement with levee sponsors and communities where most efficient and effective.
- **Routine Coordination:** Each step in the FEMA KDP process asks if there is a levee system in the project footprint, and if so, is there an ongoing or recently completed USACE project or analysis that may impact how the levee is represented on the FIRM? This question is asked at each KDP to serve as a reminder that levee system conditions and data change over time, so it is important for FEMA to routinely coordinate with USACE to ensure the most current information is taken into consideration throughout the Risk MAP project lifecycle.
- **Disaster Recovery:** Under the Stafford Act, FEMA may direct USACE (as an operating agent for the U.S. Department of Defense) to use its available resources to provide assistance in case of a major disaster or emergency declaration by the President. In areas with levee systems, USACE levee safety information and expertise contribute to the recovery efforts.
- **Coordination of Agency Processes and Policies:** USACE and FEMA will coordinate on the development and implementation of levee-related policy, including coordination of acceptable technical standards related to operation and maintenance plans, emergency preparedness plans, and levee design, construction, and rehabilitation activities.

This Document Has Been Superseded.
For Reference Only

Additional OFAs may have levee system-related data and may interact directly with communities and levee owners. If during the Flood Risk Project lifecycle, a Project Team determines that OFAs have information about a particular levee system, FEMA will contact the agencies to determine what useful input may be available. Some potential items to consider from different agencies are:

- **USBR:** USBR works in the western states and is involved with levees, canals, and dams. They may have useful data, such as construction drawings and O&M procedures.
- **USGS:** USGS is a primary source of hydrologic data used to determine flows and potential water-surface profiles related to the levees.
- **NOAA:** NOAA is a primary source for coastal data used to evaluate impacts on levees in coastal areas.
- **NRCS:** NRCS has historical involvement with some agricultural levees; drawings and design data may be available.

- United States Section of the International Boundary and Water Commission (IBWC) (Rio Grande River): IBWC has worked on, and been responsible for the design, construction, operation, and maintenance of, some levees along the Rio Grande River. However, they rarely have data related to interior drainage, so coordination with the local communities will still be required.
- U.S. Department of Agriculture (USDA): FEMA has developed some talking points related to agricultural levees, potential impacts on crop insurance, and potential coordination with local USDA staff that might be useful. (See Table 6.)
- Federal Energy Regulatory Commission (FERC): Some dam or levee structures may be owned by hydropower companies and regulated by FERC, whose efforts are usually related to safety and security, so the availability of information may be restricted.
- U.S. Environmental Protection Agency (EPA): As part of levee accreditation process, there may be a need for the levee owner to coordinate with EPA related to local environmental requirements.
- U.S. Department of Housing and Urban Development (HUD): FEMA and HUD sometimes coordinate outreach activities, so coordination with the FEMA Regional Office will be necessary to determine if there is a need for further coordination.
- The U.S. Fish and Wildlife Service (USFWS): Similar to EPA, there may be circumstances where FEMA needs to contact USFWS. For instance, dealing with vegetation on levees to provide shade to control water temperatures related for salmon in the northwest.

This Document Has Been Superseded.
For Reference Only

Any other Federal or State agency that owns or operates a levee system would likely be a source of useful information.

Table 6: Crop Insurance, Flood Insurance Rate Maps, and Levees

Internal Talking Points for FEMA/Contract Staff Attending Community Levee Meetings

Background	Stakeholders in rural areas have asked FEMA staff about what impact Flood Insurance Rate Maps (FIRMs) and levee accreditation status may have on their crop insurance policy rates.
Crop Insurance Rate Determinations	<ul style="list-style-type: none"> ▪ The USDA Risk Management Agency (RMA) makes crop insurance determinations. ▪ Crop insurance premiums are determined by county and crop type on a case-by-case basis. RMA focuses on actual flood events, not a statistical 1% annual-chance flood event. The determinations by RMA are based on gage data and USACE flood-related data, satellite imagery, aerial photography, and soil maps, to indicate the severity and/or extent of flooding. In addition, the timing of past floods compared to crop type is used to determine premiums.

<p>FEMA/USACE Related Resources</p>	<ul style="list-style-type: none"> ▪ FIRMs: FIRMs are not used by RMA for making crop insurance premium determinations. The base flood event on a FIRM is a statistical prediction of a flood, not a depiction of an actual event. ▪ NLD: RMA does, on occasion, use this data source. It provides information on levee location, condition, and the “Leveed Area.”.
<p>Role of Levees</p>	<ul style="list-style-type: none"> ▪ Levee Impact: Levees may have positive or negative impacts on cropland. <ul style="list-style-type: none"> ○ <u>Positive:</u> May reduce risk of flooding. ○ <u>Negative:</u> Interior drainage can back up on the landside of the levee, causing crop damage – especially if pump stations, flap gates, etc. are not properly operated and maintained. An actual levee breach will impact crop insurance premiums. RMA monitors levee repairs with USACE and/or local levee districts.
<p>Summary</p>	<ul style="list-style-type: none"> ▪ FEMA does not determine crop insurance premiums. ▪ Flood hazard boundaries shown on FIRMs have no impact on the USDA crop insurance program related to premium rating. ▪ A levee may be considered by RMA on a case-by-case basis. It could provide flood risk reduction, but it could also make interior drainage worse. ▪ Data collected for FEMA’s flood hazard mapping studies or accreditation per 44 CFR 65.10 may be provided to RMA to assist in rating information, but FEMA will only do so when requested by stakeholders or RMA staff.

The need for additional information on engagement with OFAs should be coordinated through the FEMA Regional Office.

**This Document Has Been Superseded.
For Reference Only**